



PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 9/5/2022
MODIFICATION / REVISION DATE: 9/5/2022

A-MCU60005/B MODULAR CABLE

CHANGE NOTIFICATION: PCN 20220509_A-MCU60005/B

DESCRIPTION OF CHANGES: CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_8285_CArev01

REASON FOR CHANGE: CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE: Details see page 3

PRODUCTS AFFECTED: A-MCU60005/B

DATE OF CHANGE AND IMPLEMENTATION: CHANGE: WEEK 20 / YEAR 2022
IMPLEMENTATION: 09/05/22

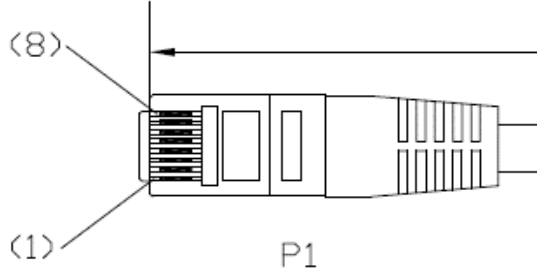
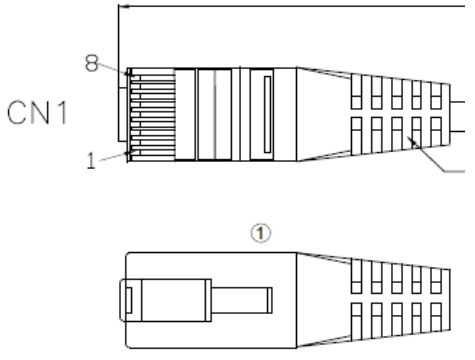
RESPONSE: NO RESPONSE TO THIS NOTIFICATION IS REQUIRED



Auf dem Schüffel 1
 D-58513 Lüdenscheid
 Tel.: +49-2351 - 554-200
 Fax +49 (2351) 554-861
 info@assmann-wsw.com
 www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 9/5/2022
 MODIFICATION / REVISION DATE: 9/5/2022

A-MCU60005/B OLD VERSION	A-MCU60xxx/x NEW VERSION																				
<p>Appearance</p>  <p>BOM</p> <p>Material:</p> <ul style="list-style-type: none"> Conductor: 26AWG 7*0.16±0.015mm Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown Included printing on cable jacket: CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2 Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C 3µ pc UL 94V-2 Cable Jacket color: Grey 	<p>Appearance</p>  <p>BOM</p> <table border="1" data-bbox="803 1312 1437 1407"> <tr> <td>①</td> <td>△</td> <td>Molding PVC</td> <td>2</td> <td>Molding PVC 65P</td> </tr> <tr> <td>①</td> <td>△</td> <td>RJ45 CONN</td> <td>2</td> <td>RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2</td> </tr> <tr> <td>①</td> <td>△</td> <td>CABLE</td> <td>1</td> <td>CAT6 U/UTP(26AWGx1PR)*4+Cross+PVC Jacket OD:5.0±0.3mm</td> </tr> <tr> <td>NO.</td> <td>NAME.</td> <td>Q'TY</td> <td colspan="2">SPECIFICATION</td> </tr> </table>	①	△	Molding PVC	2	Molding PVC 65P	①	△	RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2	①	△	CABLE	1	CAT6 U/UTP(26AWGx1PR)*4+Cross+PVC Jacket OD:5.0±0.3mm	NO.	NAME.	Q'TY	SPECIFICATION	
①	△	Molding PVC	2	Molding PVC 65P																	
①	△	RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2																	
①	△	CABLE	1	CAT6 U/UTP(26AWGx1PR)*4+Cross+PVC Jacket OD:5.0±0.3mm																	
NO.	NAME.	Q'TY	SPECIFICATION																		
<p>FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE</p>																					

