# OMRON ELECTRONICS

*See full Datasheet below...*

# MOS FET Relays
# G3VM-354C/C1/F/F1

**Analog-switching MOS FET Relay with DPST-NC Contacts. General-purpose models added.**

- Switches minute analog signals.
- Switching AC and DC.
- General-purpose models (high ON resistance) added.
- RoHS Compliant.

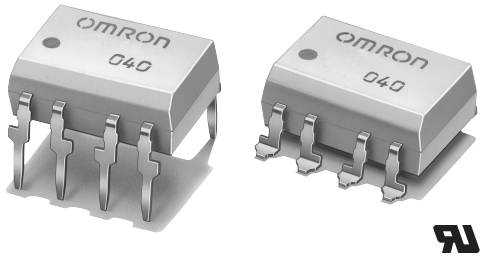

**Note:** The actual product is marked differently from the image shown here.

## ■ Application Examples

- Electronic automatic exchange systems
- Security systems
- Datacom (modem) systems
- FA systems and Measurement devices

## ■ List of Models

| Contact form | Terminals | Load voltage (peak value) | Model | Number per stick | Number per tape |
|---|---|---|---|---|---|
| DPST-NC | PCB terminals | 350 VAC | **G3VM-354C** | 50 | --- |
| | | | **G3VM-354C1** | | |
| | Surface-mounting terminals | | **G3VM-354F** | | |
| | | | **G3VM-354F1** | | |
| | | | **G3VM-354F(TR)** | --- | 1,500 |
| | | | **G3VM-354F1(TR)** | | |

## ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

**G3VM-354C/C1**



**Note:** The actual product is marked differently from the image shown here.

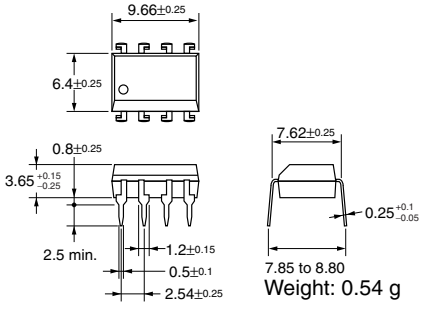


Weight: 0.54 g

**G3VM-354F/F1**



**Note:** The actual product is marked differently from the image shown here.

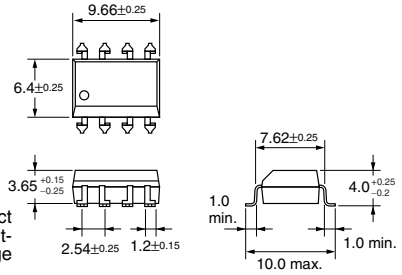


Weight: 0.54 g

## ■ Terminal Arrangement/Internal Connections (Top View)

**G3VM-354C/C1**




**G3VM-354F/F1**




## ■ PCB Dimensions (Bottom View)

**G3VM-354C/C1**




## ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

**G3VM-354F/F1**



## ■ Absolute Maximum Ratings (Ta = 25°C)

| Item | | Symbol | Rating | Unit | Measurement conditions |
|---|---|---|---|---|---|
| Input | LED forward current | $I_F$ | 50 | mA | |
| | Repetitive peak LED forward current | $I_{FP}$ | 1 | A | 100 μs pulses, 100 pps |
| | LED forward current reduction rate | $\Delta I_F$/°C | –0.5 | mA/°C | Ta ≥ 25°C |
| | LED reverse voltage | $V_R$ | 5 | V | |
| | Connection temperature | $T_j$ | 125 | °C | |
| Output | Load voltage (AC peak/DC) | $V_{OFF}$ | 350 | V | |
| | Continuous load current (AC peak/DC) | $I_O$ | 150 (100) | mA | |
| | ON current reduction rate | $\Delta I_{ON}$/°C | –1.5 (–1) | mA/°C | Ta ≥ 25°C |
| | Connection temperature | $T_j$ | 125 | °C | |
| Dielectric strength between input and output (See note 1.) | | $V_{I-O}$ | 2,500 | $V_{rms}$ | AC for 1 min |
| Operating temperature | | $T_a$ | –40 to +85 | °C | With no icing or condensation |
| Storage temperature | | $T_{stg}$ | –55 to +125 | °C | With no icing or condensation |
| Soldering temperature (10 s) | | --- | 260 | °C | 10 s |

Values in parentheses are for the G3VM-354C1/F1

**Note:** **1.** The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## ■ Electrical Characteristics (Ta = 25°C)

| Item | | Symbol | Minimum | Typical | Maximum | Unit | Measurement conditions |
|---|---|---|---|---|---|---|---|
| Input | LED forward voltage | $V_F$ | 1.0 | 1.15 | 1.3 | V | $I_F$ = 10 mA |
| | Reverse current | $I_R$ | --- | --- | 10 | μA | $V_R$ = 5 V |
| | Capacity between terminals | $C_T$ | --- | 30 | --- | pF | V = 0, f = 1 MHz |
| | Trigger LED forward current | $I_{FT}$ | --- | 1 | 3 | mA | $I_{OFF}$ = 10 μA |
| Output | Maximum resistance with output ON | $R_{ON}$ | --- | 15 (30) | 25 (50) | Ω | $I_O$ = 150 mA |
| | Current leakage when the relay is open | $I_{LEAK}$ | --- | 0.0105 (0.003) | 1.0 | μA | $I_F$ = 5 mA, $V_{OFF}$ = 350 V |
| | Capacity between terminals | $C_{OFF}$ | --- | 85 (30) | --- | pF | V = 0, f = 1MHz, $I_F$ = 5 mA |
| Capacity between I/O terminals | | $C_{I-O}$ | --- | 0.8 | --- | pF | f = 1 MHz, $V_s$ = 0 V |
| Insulation resistance | | $R_{I-O}$ | 1,000 | --- | --- | MΩ | $V_{I-O}$ = 500 VDC, $R_{oH}$ ≤ 60% |
| Turn-ON time | | $t_{ON}$ | --- | 0.1 (0.25) | 1.0 (0.5) | ms | $I_F$ = 5 mA, $R_L$ = 200 Ω, $V_{DD}$ = 20 V (See note 2.) |
| Turn-OFF time | | $t_{OFF}$ | --- | 1.0 (0.5) | 3.0(0.1) | ms | |

Values in parentheses are for the G3VM-354C1/F1

**Note:** **2.** Turn-ON and Turn-OFF Times




## ■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

| Item | Symbol | Minimum | Typical | Maximum | Unit |
|---|---|---|---|---|---|
| Load voltage (AC peak/DC) | $V_{DD}$ | --- | --- | 280 | V |
| Operating LED forward current | $I_F$ | 5 | --- | 25 | mA |
| Continuous load current (AC peak/DC) | $I_O$ | --- | --- | 150 (100) | mA |
| Operating temperature | $T_a$ | – 20 | --- | 65 | °C |

Values in parentheses are for the G3VM-354C1/F1

## ■ Engineering Data

**G3VM-354C/F**

**LED forward current vs. Ambient temperature**

$I_F$ - Ta

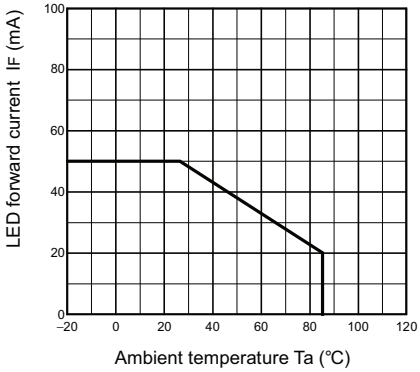


**Continuous load current vs. Ambient temperature**

$I_O$ - Ta

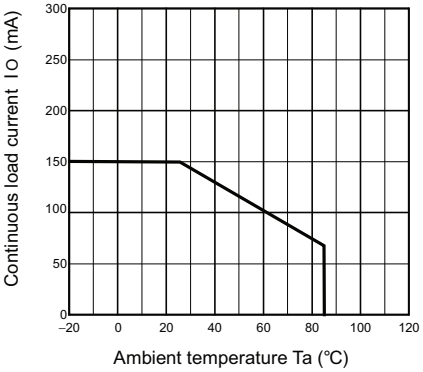


**LED forward current vs. LED forward voltage**

$I_F$ - $V_F$

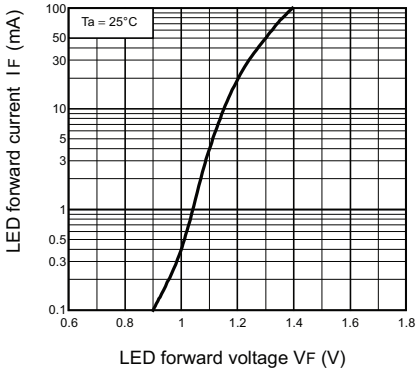


**Continuous load current vs. On-state voltage**

$I_O$ - $V_{ON}$

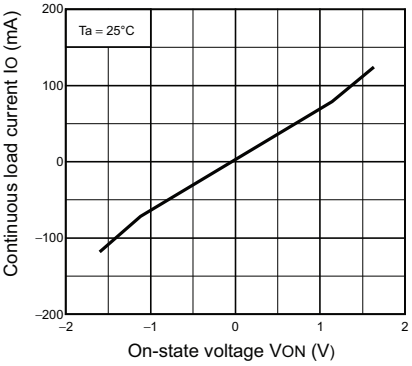


**On-state resistance vs. Ambient temperature**

$R_{ON}$ - Ta

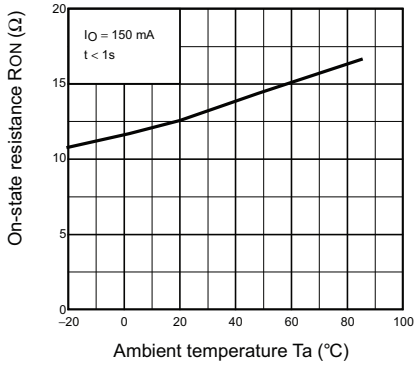


**Trigger LED forward current vs. Ambient temperature**

$I_{FC}$ - Ta

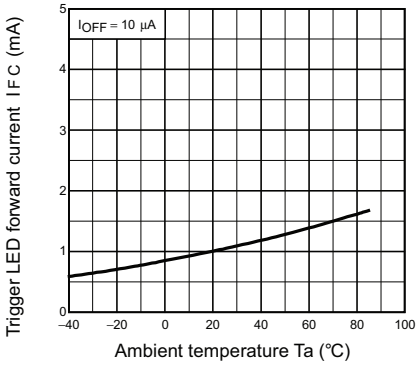


**Turn ON, Turn OFF time vs. LED forward current**

$t_{ON}$, $t_{OFF}$ - $I_F$

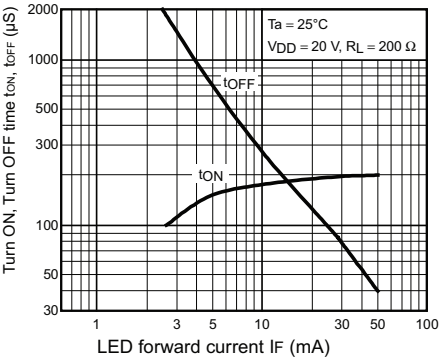


**Turn ON, Turn OFF time vs. Ambient temperature**

$t_{ON}$, $t_{OFF}$ - Ta

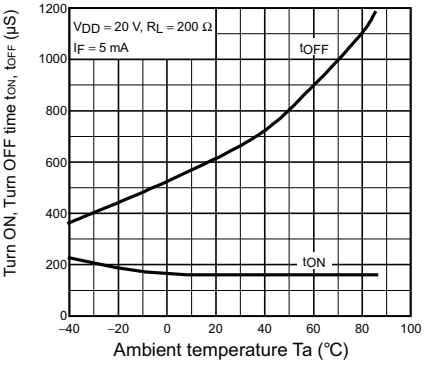


**Current leakage vs. Ambient temperature**

$I_{LEAK}$ - Ta

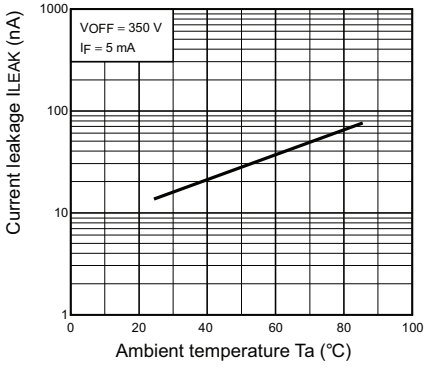

## ■ Engineering Data

**G3VM-354C1/F1**

### LED forward current vs. Ambient temperature

IF - Ta

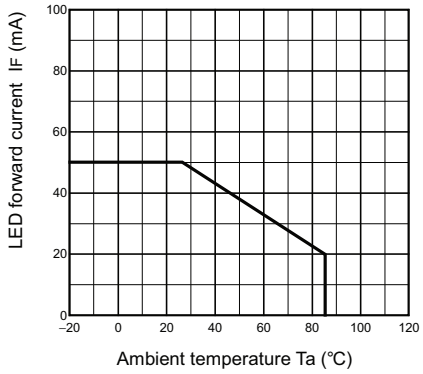


### Continuous load current vs. Ambient temperature

IO - Ta

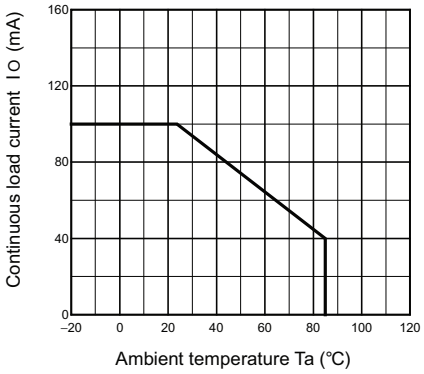


### LED forward current vs. LED forward voltage

IF - VF

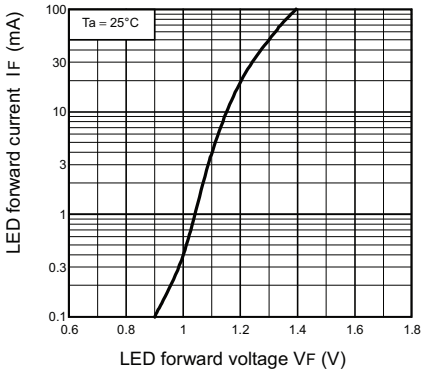


### Continuous load current vs. On-state voltage

IO - VON

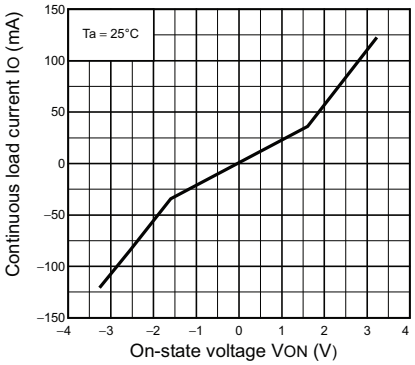


### On-state resistance vs. Ambient temperature

RON - Ta

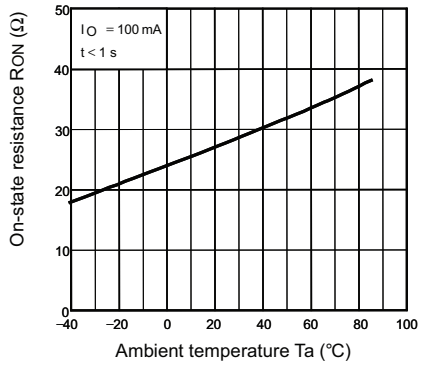


### Trigger LED forward current vs. Ambient temperature

IFC - Ta

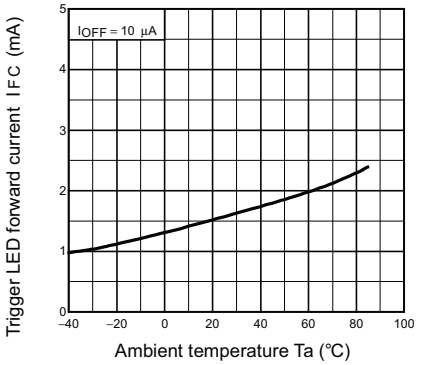


### Turn ON, Turn OFF time vs. LED forward current

tON, tOFF - IF

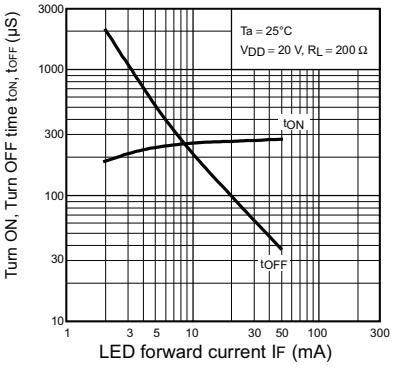


### Turn ON, Turn OFF time vs. Ambient temperature

tON, tOFF - Ta

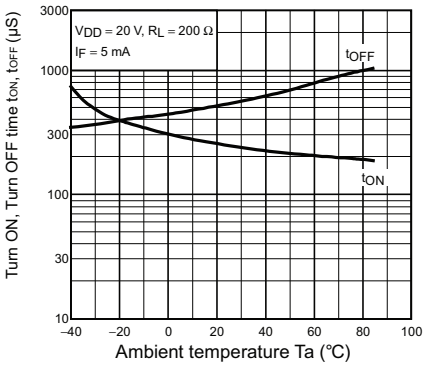


### Current leakage vs. Ambient temperature

I LEAK - Ta

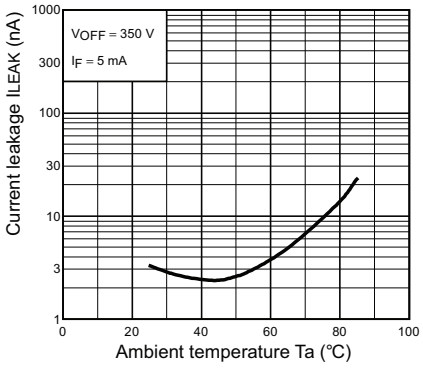

MEMO

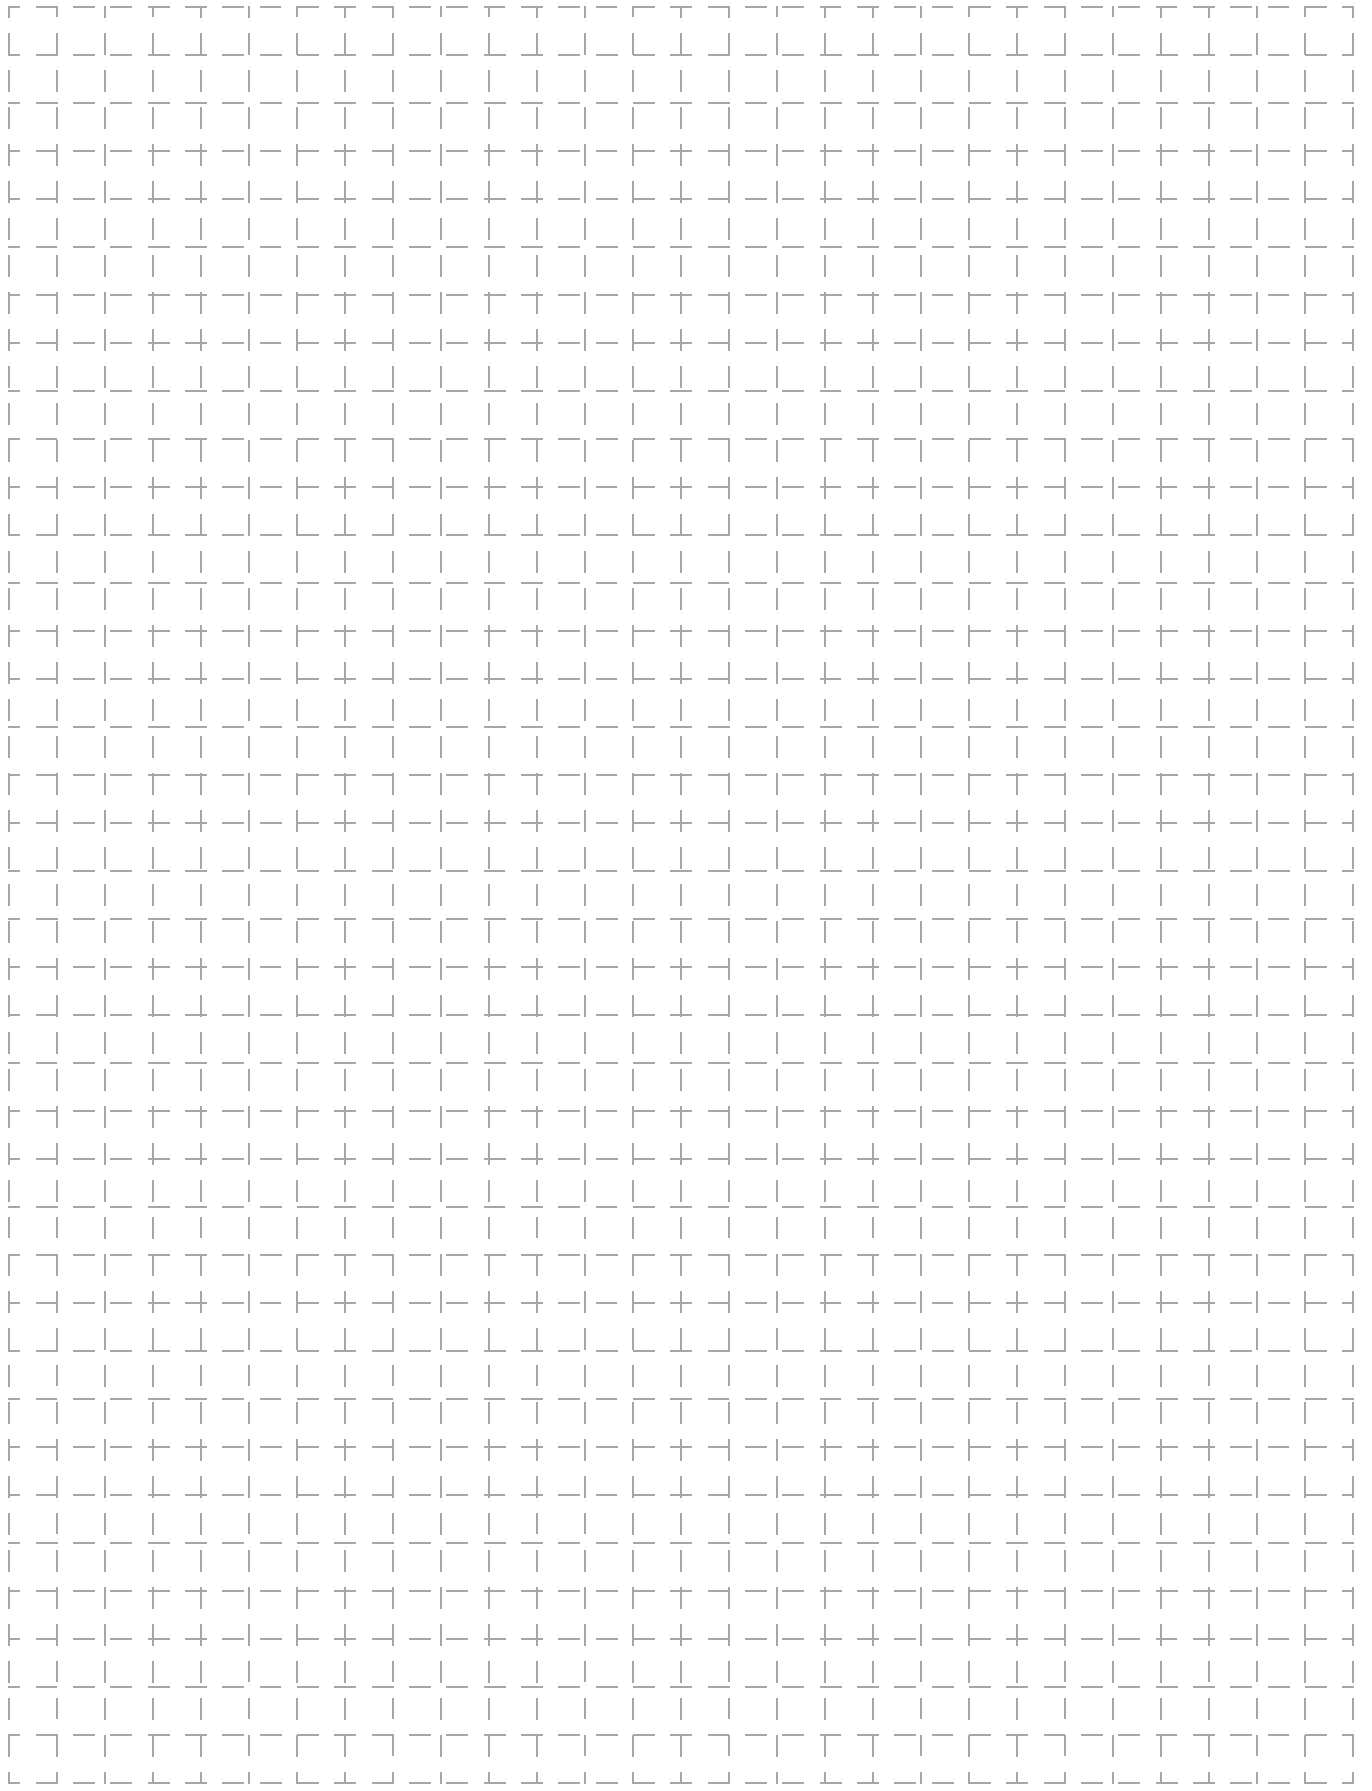

**All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html**

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

**OMRON ELECTRONIC COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173
**847-882-2288**

**OMRON ON-LINE**
Global - http://www.omron.com
USA - http://www.components.omron.com

Cat. No. X302-E-1 12/10 Specifications subject to change without notice Printed in USA