


T1/Cept/ISDN-PRI Transformers

Dual Surface Mount, 1500 Vrms, Extended & Standard Temperature Range



- RoHS peak reflow temperature rating: 245°C
- Dual SMT package contains transmit and receive transformers
- Models matched to leading transceiver ICs
- Isolation voltage: 1500 Vrms
- UL recognized

Electrical Specifications @ 25°C

| RoHS-6 Compliant Part Number | Turns Ratio ^B (Pri:Sec ±2%) | OCL @ 25°C (mH MIN) | L _L (μH MAX) | C _{w/w} (pF MAX) | DCR Pri (Ω MAX) | DCR Sec (Ω MAX) | Package/Schematic | Primary Pin |
|---|--|---------------------|-------------------------|---------------------------|-----------------|-----------------|-------------------|-------------|
| Extended Temperature Range Models¹ - Operating Temperature -40°C to +85°C | | | | | | | | |
| PE-68841NL | 1CT:2CT & 1CT:2CT | 1.20 & 1.20 | 0.80 & 0.80 | 50 & 50 | 1.00 & 1.00 | 1.70 & 1.70 | AN/2 | 12-10, 4-6 |
| PE-68822NL | 1CT:2CT & 1:1.36CT | 1.60 & 1.60 | 1.00 & 0.80 | 60 & 55 | 1.70 & 1.70 | 2.00 & 1.70 | AN/1 | 12-10, 4-6 |
| PE-68826NL ^E | 1:1/1.26 & 1:2CT | 1.20 & 1.20 | 0.80 & 0.80 | 50 & 60 | 1.00 & 1.00 | 1.10 & 1.70 | AN/4 | 12-10, 4-6 |
| PE-68828NL | 1CT:1CT & 1CT:1CT | 1.20 & 1.20 | 0.80 & 0.80 | 50 & 50 | 1.00 & 1.00 | 1.00 & 1.00 | AN/2 | 1-3, 4-6 |
| PE-68874NL | 1CT:1.15CT & 1CT:1.15CT | 1.20 & 1.20 | 0.80 & 0.80 | 50 & 50 | 1.20 & 1.20 | 1.40 & 1.40 | AN/2 | 1-3, 4-6 |
| PE-68877NL | 1CT:1CT & 1CT:2CT | 1.20 & 1.20 | 0.80 & 0.80 | 50 & 50 | 1.00 & 1.00 | 1.00 & 1.80 | AN/2 | 1-3, 4-6 |
| PE-68884NL | 1CT:1.36CT & 1CT:1.36CT | 1.20 & 1.20 | 0.80 & 0.80 | 50 & 50 | 1.20 & 1.20 | 1.40 & 1.40 | AN/2 | 1-3, 4-6 |
| Standard Temperature Range Models - Operating Temperature 0°C to +70°C | | | | | | | | |
| PE-68864NL ^A | 1CT:2CT & 1:1 | 1.20 & 1.20 | 0.30-0.55 & 0.80 | 30 & 30 | 0.70 & 0.70 | 1.20 & 0.70 | AN/3 | 1-3, 5-6 |
| PE-68836NL ^E | 1:1/1.26 & 1:1/1.26 | 1.50 & 1.50 | 0.40 & 0.40 | 45 & 35 | 0.80 & 0.80 | 1.00 & 1.00 | AN/5 | 12-10, 9-7 |

Notes: To order Tape & Reel packaging, add a "T" suffix to the part number (i.e. PE-68864NL becomes PE-68864NLT).

See Page 7 and 8 for Table Notes.

Mechanical

Schematics

AN

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

SUGGESTED PAD LAYOUT

Weight4.0 grams
Tape & Reel250/reel
Tube30/tube

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998



Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

T1/Cept/ISDN-PRI Transformers

Dual Surface Mount, 1500 Vrms, Small Package



- RoHS peak reflow temperature rating: 245°C
- Dual SMT package contains transmit and receive transformers
- Models matched to leading transceiver ICs
- UL recognized (some parts pending approval)

Electrical Specifications @ 25°C

| RoHS-6 Compliant Part Number | | Turns Ratio ^B (Pri:Sec ±5%) | OCL (mH MIN) | C _{w/w} (pF MAX) | L _L (μH MAX) | DCR Pri (Ω MAX) | Package/ Schematic | Primary Pins |
|------------------------------|----------|---|-----------------|------------------------------|----------------------------|--------------------|-----------------------|-----------------|
| STD Temp | EXT Temp | | | | | | | |
| PE-65861NL | T1090NL | 1CT:2CT & 1CT:2CT | 1.20 & 1.20 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/1 | 16-14, 6-8 |
| - | T1076NL | 1:1.15CT & 1CT:2CT | 1.20 & 1.20 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/2 | 16-14, 6-8 |
| PE-65870NL | - | 1CT:1.15CT & 1CT:1.15CT | 1.20 & 1.20 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/1 | 1-3, 6-8 |
| PE-68678NL | T1094NL | 1CT:1CT & 1CT:2CT | 1.20 & 1.20 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/1 | 16-14, 6-8 |
| PE-68786NL | - | 1CT:1.4CT & 1CT:1.4ICT | 1.00 & 1.00 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/1 | 16-14, 11-9 |
| T1023NL | - | 1CT:1.4CT & 1CT:1.4ICT | 1.00 & 1.00 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/1 | 1-3, 11-9 |
| T1021NL | - | 2CT:1/1.26CT & 2CT:1/1.26 | 1.50 & 1.50 | 40 & 40 | .50 & .50 | 0.70 & 0.70 | BH/1 | 1-3, 11-9 |
| T1137NL | TX1287NL | 1CT:2.42CT & 1CT:2.42CT | 1.20 & 1.20 | 25 & 25 | .60 & .60 | 0.70 & 0.70 | BH/1 | 1-3, 6-8 |
| - | T1146NL | 1:2/2.4 & 1CT:2CT | 1.00 & 1.00 | 35 & 35 | 1.00 & 1.00 | 0.80 & 0.80 | BH/4 | 1-3, 6-8 |
| - | TX1188NL | 1CT:2CT & 1CT:2CT | 1.20 & 1.20 | 30 & 30 | .60 & .60 | 0.70 & 0.70 | BH/1 | 1-3, 6-8 |
| - | TX1089NL | 1CT:1CT & 1CT:1CT | 1.20 & 1.20 | 30 & 30 | .80 & .80 | 0.70 & 0.70 | BH/1 | 1-3, 6-8 |
| - | TX1467NL | 1CT:1CT & 1CT:2CT | 1.20 & 1.20 | 30 & 30 | .80 & .80 | 1.00 & 1.00 | BH/3 | 16-14, 11-9 |




Notes: Standard (STD) operating temperature range is 0C to 70C. Extended (EXT) operating temperature range is -40C to +85C.

See pages 7 and 8 for table notes.

Mechanicals

Schematics

BH

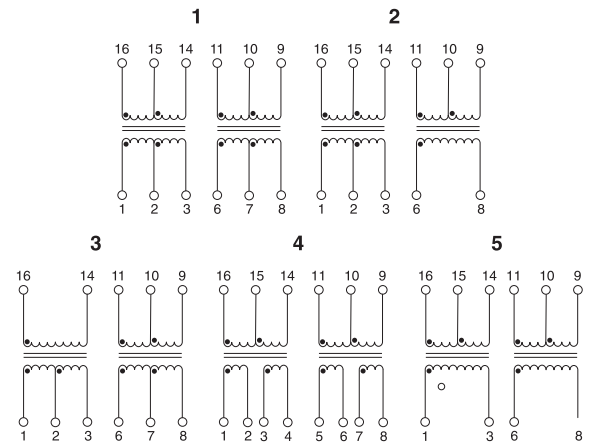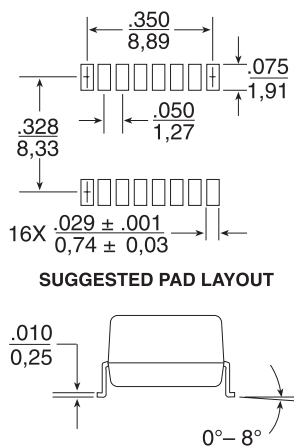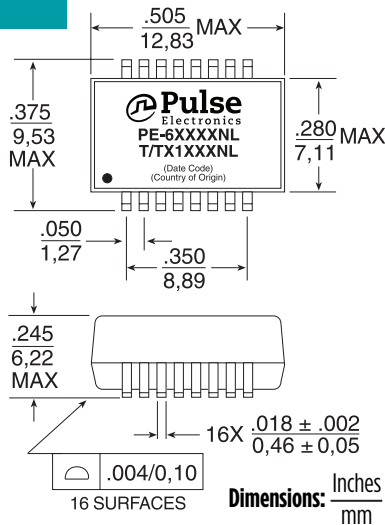

Weight1.0 grams
Tape & Reel600/reel
Tube40/tube

Unless otherwise specified, all tolerances are ± $\frac{.010}{0.25}$

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998


Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

T1/Cept/ISDN-PRI Transformers

Single Reinforced Insulation, 3 kVrms



- RoHS peak reflow temperature rating: 245°C
- Dual SMT package contains transmit and receive transformers
- Models matched to leading transceiver ICs
- Isolation voltage: 1500 Vrms
- UL recognized

Electrical Specifications @ 25°C - Operating Temperature 0°C to 70°C (Unless Otherwise Noted)



| RoHS-6 Compliant Part Number | Turns Ratio ^B (Pri:Sec ±5%) | ^B OCL ^C (mH MIN) | w/w ^L (pF MAX) | L (μH MAX) | DCR Pri (Ω MAX) | DCR Sec (Ω MAX) | Package/ Schematic | Primary Pins |
|------------------------------|---|---|------------------------------|---------------|--------------------|--------------------|-----------------------|-----------------|
| PE-65830NL | 1.27CS:1 | .800 | 15 | 0.70 | 0.50 | 0.35 | IS/3 | 1-5 |
| PE-65832NL | 1:1.36CT | 1.20 | 35 | 0.60 | 0.70 | 0.90 | IS/4 | 10-6 |
| PE-65833NL ^A | 1CT:2CT | 1.20 | 20 | 0.30-0.55 | 0.50 | 0.90 | IS/1 | 1-5 |
| PE-65834NL | 1:1 | 1.20 | 20 | 0.50 | 0.50 | 0.50 | IS/2 | 1-5 |
| PE-65835NL | 1CT:2CT | 1.20 | 15 | 0.80 | 0.70 | 1.10 | IS/1 | 1-5 |
| PE-65838NL | 1:1.14CT | 1.50 | 30 | 1.00 | 0.70 | 0.90 | IS/4 | 10-6 |
| PE-65839NL ^E | 1:1/1.26 | 1.50 | 35 | 0.60 | 0.70 | 1.10 | IS/4 | 10-6 |
| PE-68646NL ^E | 1:1.58/2 | 1.50 | 20 | 0.70 | 0.70 | 1.20 | IS/4 | 10-6 |

or table notes.


Mechanical

Schematics

IS

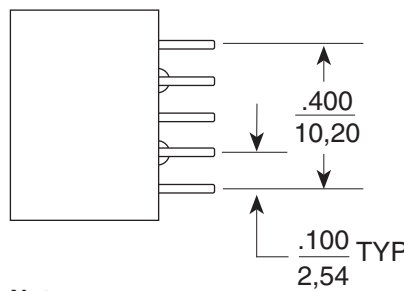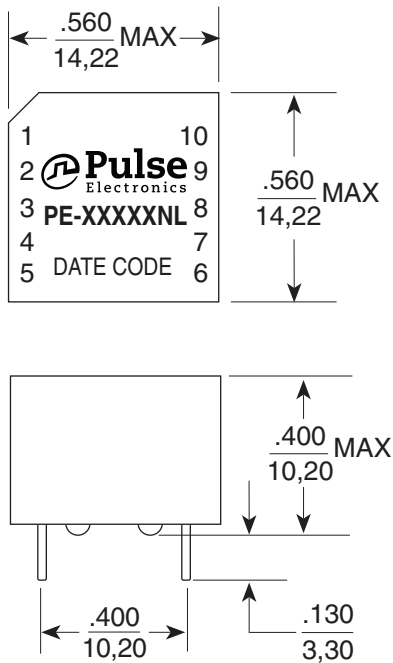

Notes:
Leads are 22 AWG solderable.
Unused pins not provided.

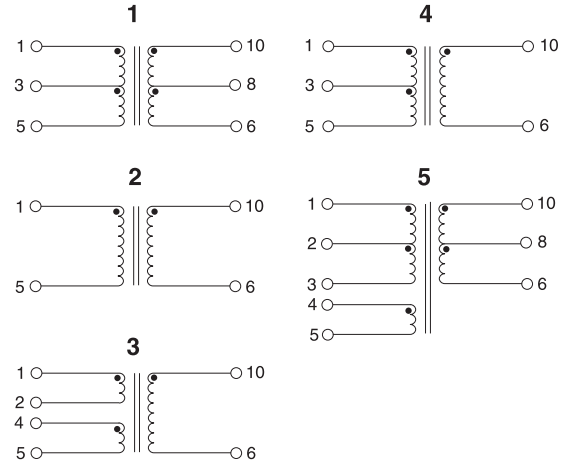


Dimensions: Inches/mm Unless otherwise specified, all tolerances are ± .010/0,25

Weight4 grams
Tube35/tube

USA 858 674 8100 Germany 49 7032 7806 0 Singapore 65 6287 8998 Shanghai 86 21 62787060 China 86 755 33966678 Taiwan 886 3 4356768

T1/Cept/ISDN-PRI Transformers

Single Through Hole, 1500Vrms

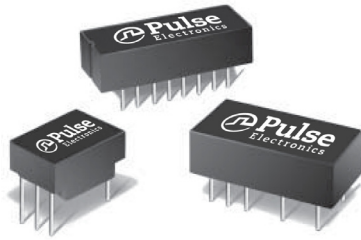

- RoHS peak reflow temperature rating: 245°C
- Extended and standard temperature range
- Dual and single through hole models available
- Models matched to leading transceiver ICs
- UL recognized
- Isolation Voltage: 1500 Vrms MIN

Electrical Specifications @ 25°C

| RoHS-6 Compliant Part Number | Turns Ratio ^B (Pri:Sec ±2%) | OCL @ 25°C (mH MIN) | C _{w/w} (pF MAX) | L _L (μH MAX) | DCR Pri (Ω MAX) | DCR Sec (Ω MAX) | Package/Schematic | Primary Pins |
|---|--|---------------------|---------------------------|-------------------------|-----------------|-----------------|-------------------|--------------|
| Standard Temperature Range Single Transformers - Operating Temperature 0°C to +70°C | | | | | | | | |
| PE-64931NL | 1:1:1 (1:2CS) | 1.20 | 25 | 0.50 | 0.70 | 0.70 & 0.70 | HC/2 | 1-2 |
| PE-64934NL | 1:1:w | 1.20 | 25 | 0.50 | 0.70 | 0.70 | HC/1 | 1-2 |
| PE-64936NL ^E | 1CT:1 | 1.20 | 25 | 0.80 | 0.70 | 0.70 | HC/3 | 1-5 |
| PE-64937NL | 1:1.36 | 1.20 | 35 | 0.80 | 0.70 | 0.80 | HC/1 | 5-6 |
| PE-65351NL | 1:2CT | 1.20 | | 0.50 | 0.70 | 1.30 | HC/3 | 2-6 |
| PE-65363NL | 1:4CT | 0.50 | 40 | 1.00 | 0.70 | 1.50 | HC/5 | 1-5 |
| PE-65388NL | 1:1.15CT | 1.50 | 35 | 0.60 | 0.70 | 0.90 | HC/3 | 2-6 |
| PE-65389NL ^E | 1:1/1.26 | 1.50 | 40 | 0.40 | 0.70 | 0.90 | HC/3 | 2-6 |
| PE-65415NL | 1CT:2CT | 1.20 | 30 | 0.50 | 0.70 | 1.20 | HC/4 | 1-5 |
| PE-68644NL | 1CT:1 | 0.70 | 20 | 0.70 | 0.20 | 0.80 | HC/3 | 1-5 |
| Extended Temperature Range Single Transformer - Operating Temperature -40°C to +85°C | | | | | | | | |
| PE-65770NL | 1:1.15CT | 1.50 | 40 | 0.80 | 0.90 | 1.00 | HC/3 | 2-6 |
| PE-65771NL | 1CT:2CT | 1.20 | 50 | 0.60 | 1.00 | 2.00 | HC/4 | 2-6 |
| PE-65778NL | 1CT:1CT | 1.20 | 40 | 1.00 | 1.00 | 1.00 | HC/4 | 1-5 |
| TX1252NL | 1CT:1 | 1.20 | 40 | 1.00 | 1.00 | 1.00 | HC/3 | 1-5 |

ages 7 and 8 for Table Notes.

Mechanical

Schematic

HC

Notes: Leads are 24 AWG solderable. Unused pins not provided.

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

Weight2 grams
 Tube60/tube

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4756768

T1/Cept/ISDN-PRI Transformers

Dual Through Hole, 1500 Vrms




Electrical Specifications @ 25°C

| RoHS-6 Compliant Part Number | Turns Ratio ^B (Pri:Sec ±5%) | OCL @ 25°C (mH MIN) | C _{w/w} (pF MAX) | L _L (μH MAX) | DCR Pri (Ω MAX) | DCR Sec (Ω MAX) | Package/Schematic | Primary Pins |
|--|--|---------------------|---------------------------|-------------------------|-----------------|-----------------|-------------------|--------------|
| Standard Temperature Range Single Transformers - Operating Temperature 0°C to +70°C | | | | | | | | |
| PE-64952NL | 1:2CT & 1:1.36 | 1.20 & 1.20 | 35 & 35 | 0.50 & 0.80 | 0.80 & 0.80 | 1.20 & 1.00 | HD/2 | 14-12, 5-7 |
| PE-65565NL | 1:1.15CT & 1:2CT | 1.50 & 1.20 | 35 & 40 | 0.60 & 0.50 | 0.70 & 0.70 | 1.10 & 1.30 | TD/1 | 14-12, 5-7 |

See Pages 7 and 8 for Table Notes.

Mechanicals


TD DUAL

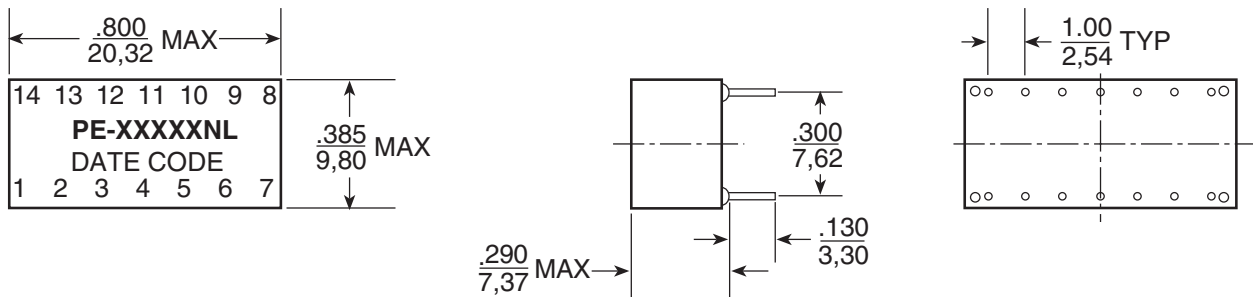

Weight2.6 grams
 Tube25/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$


HD DUAL

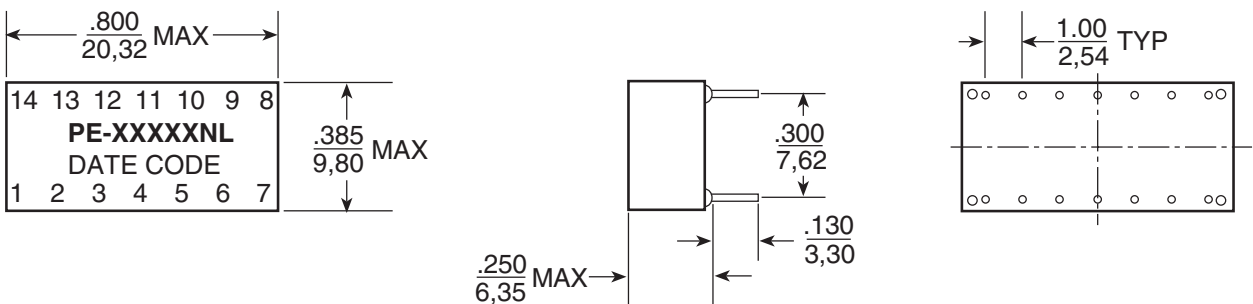

Weight2.3 grams
 Tube25/tube


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

Schematics

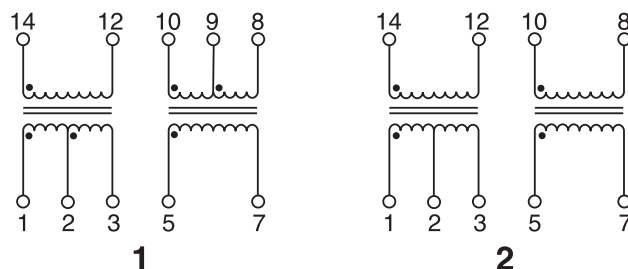

T1/Cept/ISDN-PRI Transformers

Transformer Selection Guide



| IC Manufacturer/ IC Part Number | Com_ments | Dual SMT (BH Pkg.) | | Dual SMT (AN Pkg.) | | Single Through Hole | | | | Dual Through Hole | | Single Through Hole | | | |
|------------------------------------|----------------------------|--------------------|------------|--------------------|------------|---------------------|------------|---------------|------------|-------------------|------------|---------------------|------------|------------|------------|
| | | Std Temp | Ext Temp | Std Temp | Ext Temp | Standard Temp | | Extended Temp | | Std Temp | Ext Temp | Reinforced 3 k Vrms | | | |
| | | TX & RX | TX & RX | TX & RX | TX & RX | TX | RX | TX | RX | TX & RX | TX & RX | TX | RX | | |
| Mindspeed (Conexant) | BT8510 | TI/EI | - | - | - | PE-68826NL | PE-65389NL | PE-65351NL | - | PE-65771NL | - | - | PE-65839NL | PE-65835NL | |
| | BT8510 | TI/EI | - | - | T1021NL | PE-68826NL | PE-65389NL | PE-65351NL | - | PE-65771NL | - | - | PE-65839NL | PE-65835NL | |
| | BT8370/5/6 | Better RL | - | - | - | PE-68822NL | PE-64937NL | PE-64936NL | - | PE-65771NL | PE-64952NL | - | PE-65832NL | PE-65834NL | |
| | BT8370/5/6 | Low Power | - | T1076NL | - | - | PE-65388NL | PE-64936NL | - | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65834NL | |
| Cirrus Logic (Crystal) | 61318 | 120 EI | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65835NL | |
| | 61318 | 75 EI | - | - | - | - | PE-64936NL | - | PE-65771NL | PE-65778NL | - | - | PE-68646NL | PE-65835NL | |
| | 61577 | TI & EI | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | - | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |
| | 61304A/5A/535A/574A../75 | TI | - | T1076NL | - | - | PE-65388NL | PE-65351NL | PE-65770NL | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65835NL | |
| | 61304A/5A/535A/574A../75 | 75 EI | - | - | - | PE-68826NL | PE-65389NL | PE-65351NL | - | PE-65771NL | - | - | PE-65838NL | PE-65835NL | |
| | 61304A/5A/535A/574A../75 | 120 EI | - | - | - | PE-68826NL | PE-65389NL | PE-65351NL | - | PE-65771NL | - | - | PE-65838NL | PE-65835NL | |
| | 61582, 61583 | - | PE-65870NL | - | PE-68874NL | PE-68874NL | PE-65388NL | PE-65388NL | PE-65770NL | PE-65770NL | PE-65770NL | - | - | PE-65838NL | PE-65838NL |
| | 61582, 61581 | - | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-68778NL | PE-68778NL | - | - | PE-65835NL | PE-65835NL |
| | 61582, 61581 | Host | - | - | - | - | PE-65351NL | PE-64936NL | PE-65771NL | PE-68778NL | PE-68778NL | - | - | PE-65835NL | PE-65835NL |
| | 61881 | - | - | T1076NL | - | - | PE-65388NL | PE-65351NL | PE-65770NL | PE-68778NL | PE-68778NL | - | - | PE-65835NL | PE-65835NL |
| | 61584/84A | IQ3 | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-68778NL | PE-68778NL | - | - | PE-65835NL | PE-65835NL |
| | 61584/82/83/A | IQ5 | PE-65870NL | - | PE-68874NL | PE-68874NL | PE-65388NL | PE-65388NL | PE-65770NL | PE-68778NL | PE-68778NL | - | - | PE-65838NL | PE-65838NL |
| Maxim (Dallas) | DS2196 | - | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65838NL | |
| | DS2151/2152/2153/2154 | - | - | T1076NL | - | - | PE-65388NL | PE-64936NL | PE-65770NL | PE-65778NL | PE-65565NL | - | PE-65834NL | PE-65834NL | |
| | DS2151/2152/2153/2154 | - | - | - | - | PE-68822NL | - | PE-64936NL | - | PE-65778NL | PE-64952NL | - | PE-65832NL | PE-65834NL | |
| | DS2148/O48 | 3V | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65838NL | PE-65838NL | |
| | DS2148/O48 | 5V | - | - | - | PE-68822NL | - | PE-64936NL | - | PE-65778NL | PE-64952NL | - | PE-65832NL | PE-65834NL | |
| | DS21352/O352, DS21354/O354 | - | PE-65878NL | T1094NL | PE-68874NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65838NL | PE-65838NL | |
| | DS21552/O552, DS21354/O554 | - | - | T1076NL | - | - | PE-65388NL | PE-64936NL | PE-65770NL | PE-68778NL | PE-65565NL | - | PE-65838NL | PE-65834NL | |
| DS21552/Qww52, DS1554/O554 | - | - | - | - | PE-68822NL | - | PE-64936NL | - | PE-68778NL | PE-64952NL | - | PE-65832NL | PE-65834NL | | |
| Exar | T5683A, 59191 | - | PE-65861NL | T1090NL | - | PE-68841NL | PE-65415NL | PE-65415NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |
| | T5894, T5897, T5997 | - | PE-65861NL | T1090NL | PE-65861NL | PE-68841NL | PE-65415NL | PE-65415NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |
| | T5791/T93/94/95 | - | - | - | - | PE-68826NL | PE-65389NL | PE-64934NL | - | PE-65778NL | - | - | PE-65839NL | PE-65834NL | |
| | T5894, T5897, T5997 | - | - | - | - | PE-68822NL | PE-64937NL | PE-65415NL | - | PE-65771NL | PE-64952NL | - | PE-65832NL | PE-65835NL | |
| | 82L30/34/38 | - | PE-65861NL | T1090NL | PE-65861NL | PE-68841NL | PE-65415NL | PE-65415NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |
| | 82L34/38 | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| | T5684, T7288, 82D20 | - | - | - | - | PE-68822NL | PE-64937NL | PE-65351NL | - | PE-65771NL | PE-64952NL | - | - | PE-65835NL | PE-65835NL |
| | Infineon Technologies | PEB 2254/55 | EI/TT & JI | PE-68786NL | - | - | - | - | - | - | - | - | - | - | - |
| | | PEB 2254/55 | EI/TT & JI | T1023NL | - | - | - | - | - | - | - | - | - | - | - |
| | Intel (Level One) | LXT 300/301 | - | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL |
| LXT 304/305/307 | | EI, TI | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |
| LXT 304/305/307 | | TI | - | T1076NL | - | - | PE-65388NL | PE-65351NL | PE-65770NL | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65835NL | |
| LXT 304/305/307 | | 75EI, 120EI | - | - | - | PE-68826NL | PE-65389NL | PE-65351NL | - | PE-65771NL | - | - | PE-65839NL | PE-65835NL | |
| LXT 304/305/307 | | DSX-1, D4 | - | - | - | - | - | PE-65351NL | - | - | - | - | - | - | |
| LXT 310/317/318 | | - | PE-68678NL | T1094NL | - | - | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65834NL | |
| LXT 312/313/315 | | - | - | - | - | - | - | PE-64936NL | PE-65778NL | PE-65778NL | - | - | PE-65834NL | PE-65834NL | |
| LXT 331 | | TI, EI | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65834NL | |
| LXT 331, LXT 332 | | - | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |
| LXT 331, LXT 332 | | - | - | T1076NL | - | - | PE-65388NL | PE-65351NL | PE-65770NL | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65835NL | |
| LXT 331, LXT 332 | | - | - | - | - | - | - | PE-65351NL | - | - | - | - | - | - | |
| LXT 334, LXT 335 | | TI, EI | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | PE-65771NL | - | PE-65838NL | PE-65835NL | |
| LXT 334, LXT 335 | | 120/75 EI | - | - | - | PE-68822NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | PE-64952NL | - | PE-65835NL | PE-65835NL | |
| LXT 334, LXT 335 | | 75 EI | - | - | - | PE-68826NL | PE-65389NL | PE-65351NL | PE-65771NL | PE-65771NL | - | - | PE-65839NL | PE-65835NL | |
| LXT 334, LXT 335 | | - | - | - | - | - | PE-64936NL | - | - | - | - | - | - | - | |
| LXT 336 | | - | PE-65861NL | T1090NL | PE-68828NL | PE-68828NL | - | PE-65351NL | - | PE-65778NL | - | - | - | PE-65835NL | |
| LXT 350, LXT 351, LXT 359 | | TI, EI | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65834NL | |
| LXT 350, LXT 351 | | - | - | T1076NL | - | - | PE-65388NL | PE-65351NL | PE-65770NL | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65835NL | |
| LXT 350, LXT 351 | | 120, EI | - | - | - | - | - | PE-65351NL | - | - | - | - | - | - | |
| LXT 360/361/362/363 | | TI, EI | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65834NL | |
| LXT 360/361/362/363 | - | - | T1076NL | - | - | PE-65388NL | PE-65351NL | PE-65770NL | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65835NL | | |
| LXT 360, LXT 361 | 120, EI | - | - | - | - | - | PE-65351NL | - | - | - | - | - | - | | |
| LXT 380/381/384/386/388 | TI, EI | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64936NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65834NL | | |
| LXT 380/381/384/386/388 | TI, EI | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | | |
| LXT 3104, LXT 3108 | TI, EI | PE-65861NL | T1090NL | - | PE-68841NL | PE-64936NL | PE-4936NL | PE-65778NL | PE-65778NL | - | - | PE-65835NL | PE-65835NL | | |
| Lucent Technologies | T7288, T290A | CEPT | - | - | - | PE-68822NL | - | PE-65415NL | - | PE-65771NL | PE-64952NL | - | PE-65832NL | PE-65835NL | |
| | T7289A | DS1 | - | T1076NL | - | - | - | PE-65351NL | PE-65770NL | PE-65771NL | PE-65565NL | - | PE-65838NL | PE-65835NL | |
| | T7688, T7690, T7698 | CEPT | - | - | PE-68841NL | PE-68841NL | - | - | - | - | - | - | PE-65832NL | PE-65832NL | |
| | T7689, T7690, T7698 | DS1 | PE-65870NL | - | PE-68874NL | PE-68874NL | - | - | PE-65770NL | PE-65770NL | - | - | PE-65838NL | PE-65838NL | |
| | T7693, T7697 | CEPT | - | - | - | - | - | - | - | - | - | - | - | - | |
| | T7693, T7697 | CEPT | TI137NL | TX1287NL | - | - | - | - | - | - | - | - | - | - | |
| TLIU04C1 | DS1 | PE-65870NL | - | PE-68874NL | PE-68874NL | - | - | PE-65770NL | PE-65770NL | - | - | PE-65838NL | PE-65838NL | | |
| TLIU04C1 | CEPT | PE-65870NL | - | PE-68874NL | PE-68884NL | - | - | PE-65770NL | PE-65770NL | - | - | PE-65838NL | PE-65832NL | | |
| Zarlink | MT9071, MT9076 | - | TI137NL | TX1287NL | - | - | - | - | - | - | - | - | - | - | |
| | MT9074, MT9075 | - | PE-68678NL | T1094NL | PE-68877NL | PE-68877NL | PE-65351NL | PE-64934NL | PE-65771NL | PE-65778NL | - | - | PE-65835NL | PE-65834NL | |
| PMC-Sierra | PM4318 | - | - | - | - | PE-68822NL | PE-64937NL | PE-65351NL | - | PE-65771NL | PE-64952NL | - | PE-65832NL | PE-65835NL | |
| | PM4351/4354 | COMET | PE-65861NL | T1090NL | - | PE-68841NL | PE-65351NL | PE-65351NL | PE-65771NL | PE-65771NL | - | - | PE-65835NL | PE-65835NL | |

Application Notes


1. Extended Temperature Range Models - For extended temperature range transformers (-40°C to +85°C operating temperature range), OCL (Open Circuit Inductance for the primary winding) is specified at both -40°C and +25°C. At -40°C, OCL is 600 μH minimum for all low temperature models. All other parameters are specified at +25°C only. Standard temperature range is 0°C to +70°C.

2. ET Product - All coils have an ET product of 10 V-μsec minimum.


3. Flammability - Materials used in the products are recognized as UL94-VO approved. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).

4. Balance Characteristics - The transformers meet the requirements for longitudinal balance of FCC part 68.

5. Common Mode Rejection Ratio - The CMRR for all transformers is better than 50 dB at 1 MHz. A typical test circuit is shown below.

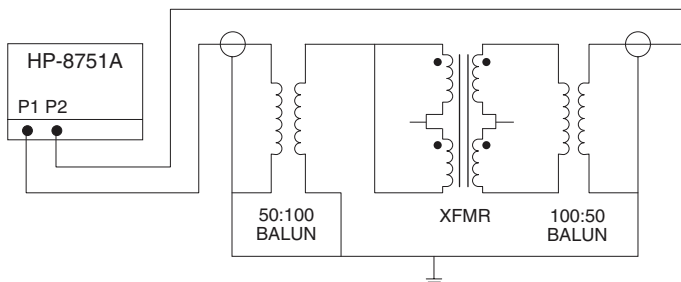

6. Crosstalk Attenuation - In the dual packages, which contain transmit and receive transformers side by side, sufficient crosstalk attenuation is achieved by the inherent characteristics of the toroid cores as well as by their proper positioning. The crosstalk attenuation is typically 50 dB or better from 100 kHz to 10 MHz. This result was established with the test circuit shown below.

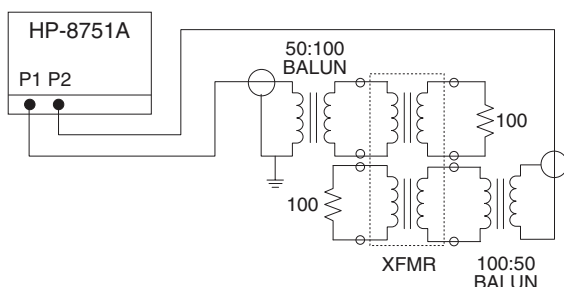

7. Return Loss - ITU-T G.703 and European national regulatory documents specify minimum return loss levels. The transformers will allow these limits to be complied within situations where they are applicable.

| Frequency | 50-100 kHz | 100 kHz-2 MHz | 2-3 MHz |
|-------------|------------|---------------|---------|
| Return Loss | | | |
| TX | 9 dB | 15 dB | 11 dB |
| RX | 12 dB | 18 dB | 14 dB |

8. Surge Voltage Capability - All transformers and chokes meet surge voltage tests according to the most stringent regulatory documents when system designs include the proper voltage and current suppression devices:

Metallic Voltage: 800 V peak, 10/560 μsec
 Longitudinal Voltage: 2,400 V peak, 10/700 μsec

9. Isolation Voltage - 100% of transformers are tested during production to the specified isolation voltage level.

10. Safety Agency Recognition - Parts listed as “Recognized” or “Certified” meet Underwriter Laboratories, UL 1459 and UL 1950 per file E133523 (S).


Transformers with Reinforced Insulation according to IEC950, such as PE-68646NL (pg. 3) is certified by the following organizations:

| Code | Certificate Information |
|------|---|
| T | TUV, EN60 950/EN 41003, Cert. R9371358, reinforced insulation |
| U | UL 1459/UL1950, File E133523 (S), reinforced insulation |

11. General Information - The transformers are specifically designed for use in 1.544 Mbps (T1), 2.048 Mbps (CEPT) and ISDN Primary rate (PRI) interface applications. They are matched to the majority of the line interface transceiver ICs currently available. Use of the proper transformer allows the interface circuit to comply with ITU-T G.703 and other standards regarding pulse waveform, return loss, and balance.

12. Common Mode Chokes - The “high-frequency” 4-lines common mode chokes shown in this data sheet provide an effective means of compliance with national and international regulations on EMI. They are designed to be used in conjunction with Pulse’s T1/CEPT transformers as shown in the typical application below. Crosstalk is typically -70 dB at 1 MHz and -55 dB at 10 MHz.

Typical Application

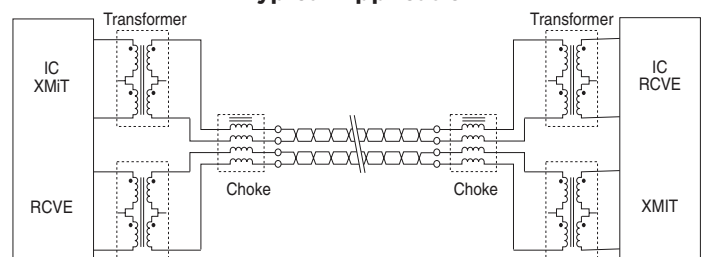

Notes From Tables (pages 1-6):

A. Tolerance leakage inductance:
 .30 μ H min to .55 μ H MAX.

B. OCL (primary inductance) and L_L (leakage inductance) are measured at the primary winding. Turns ratio is specified primary:secondary. (CT = Center Tap; CS = Split Center Tap).

C. To make a 1CT:1 ratio from a 1CT:2CT ratio, use only one half of the secondary (2CT) winding.

D. For Reinforced 3 kVrms Dual SMT Transformers, refer to data sheet T617. For Octal SMT Transformers, refer to data sheet T622.

E. Dual Ratio Transformers: These transformers have tapped secondary windings to provide two turns ratios (T/R). Use the entire primary winding and connect

| Part Number | Turns Ratio 1 | Secondary Pins | Turns Ratio 2 | Secondary Pins |
|-------------|---------------|----------------|---------------|---------------------|
| PE-65839NL | 1:1 | 3-5 | 1:1.26 | 1-5 |
| PE-68646NL | 1:1.58 | 3-5 | 1:2 | 1-5 |
| PE-65389NL | 1:1 | 3-5 | 1:1.26 | 1-5 |
| PE-68826NL | 1:1 | 2-3 | 1:1.26 | 1-3 |
| PE-68836NL | 1:1 | 2-3/5-6 | 1:1.26 | 1 ^{3/4} -6 |

F. Standard packaging for surface mount "AN" and "LA" packages is ant-static tubes. Optional Tape & Reel packaging can be ordered by adding "T" suffix to the part number (i.e. PE-68864NLT).


G. Safety Agency approvals pending.

H. The turns ratio of these devices have been designed, in conjunction with semiconductor vendor recommendations, to allow connections to various terminations (e.g 75 Ω or 120 Ω with the same transformer). For 75 Ω termination, the PEB 2235 requires the following turns ratio: 1:1.57 (TX) and 1:1.26 (RX) which can be achieved using pins (1-2):(15-16) for TX and (10-11):(5-8) for RX. For 120 Ω , the following turns ratio are required: 1:2 (TX) and 1:1 (RX), which are pins (1-2):(16-14) for TX and (9-11):(5-8) for RX.

Electrical Specifications @ 25°C - Operating Temperature 0°C to 70°C


| Pulse Part Number | Turns Ratio ($\pm 5\%$) | OCL (μ H MIN) | Package/Schematic |
|---|---------------------------|--------------------|----------------------|
| HIGH FREQUENCY COMMON MODE CHOKES, 4-LINES | | | |
| PE-65554NL | 1:1:1:1 | 24.0 | IN/1 (ThroughHole) |
| PE-65555NL | 1:1:1:1 | 8.0 | IN/1 (ThroughHole) |
| PE-65854NL | 1:1:1:1 | 47.0 | SH/1 (Surface Mount) |
| PE-65857NL | 1:1:1:1 | 24.0 | LA/2 (Surface Mount) |

Notes: For additional Common Mode Chokes, refer to data sheet **G00Z**

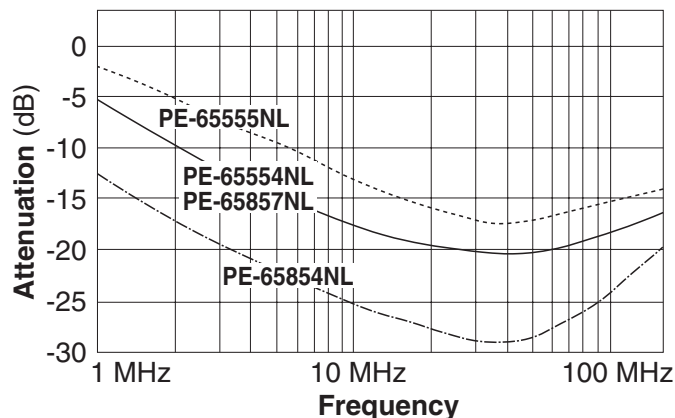

Typical common mode attenuation for high-frequency common mode chokes based on a 100 Ω system.

Schematics




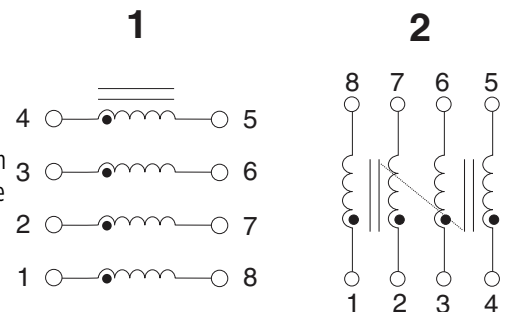


Common Mode Chokes For Telecom Applications





For EMI Reduction

Mechanicals



SH



LA

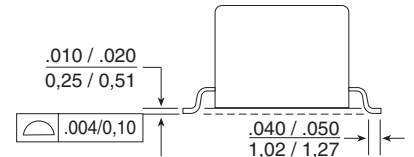

IN

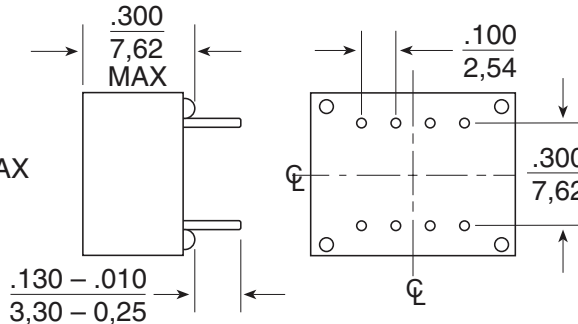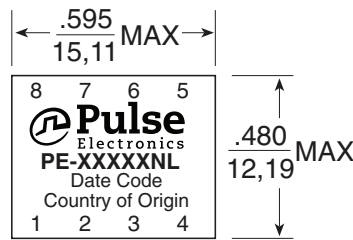

| | SH | LA | IN |
|--|----------------|---------------|----------------|
| Weight |0.3 grams |2 grams |2.5 grams |
| Tape & Reel |1500/reel |250/reel |(N/A) |
| Tube |25/tube |30/tube |35/tube |
| Dimensions: | Inches mm | | |
| Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$ | | | |

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany
Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 3396678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2016. Pulse Electronics, Inc. All rights reserved.