

MC1507

10 TO 1500 MHz TO-8 DOUBLE-BALANCED MIXER

Typical Values

	MC1507
LO & RF	10-1500 MHz
IF	DC to 1000
Third Order I.P.	+23.0 dBm
Conversion Loss	6.5 dB
LO Drive (nominal)	+15.0 dBm
High Isolation (LO to RF)	35.0 dB

SPECIFICATIONS*

Parameter	Port	Frequency (MHz)	Typ. (dB)	Guaranteed -55 to +85 °C Max. (dB)
SSB Conversion Loss and SSB Noise Figure	f_R	20 to 600	7.0	8.5
	f_L	10 to 800	7.0	8.5
	f_I	DC to 200	7.0	8.5
	f_R	10 to 1500	7.5	9.0
	f_L	10 to 1500	7.5	9.0
	f_I	DC to 200	7.5	9.0
	f_I	DC to 1000	8.5	10.0
Conversion Comp. Desensitization Level	f_R f_{R2}	Level = +3 dBm Level = +1 dBm	— —	1.0 1.0
Isolation			Typ. (dB)	Min. (dB)
f_L at R	f_L	10 to 800	40	32
f_L at I	f_L	800 to 1200	35	25
f_L at R	f_L	1200 to 1500	35	22
f_L at I	f_L	1200 to 1500	25	20
f_L at R	f_L	1200 to 1500	35	22
f_L at I			24	16
Third Order Intercept		LO = +15.0 dBm	+23.0 dBm	—

* 1) Measured in a 50-ohm system with nominal LO drive of +15.0 dBm as a downconverter.

2) The I-port frequency range extends to DC for phase detection, pulse modulation, or attenuation applications.


3) Noise figure is specified only down to 1 MHz for the IF frequency to avoid 1/F contributions.

ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-65 to +125 °C
Peak Input Power	+23 dBm @ 25 °C derate to +17 dBm @ 100 °C
Peak Input Current @ 25°C	50 mA DC


MC1507

TO-8 Package for Mixer

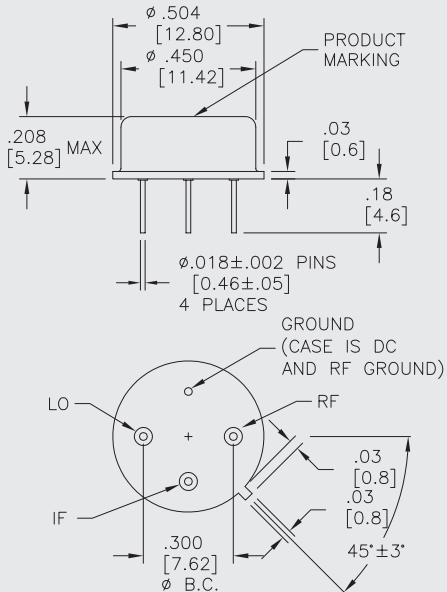









MTS1507

Surface Mount Package for Mixer

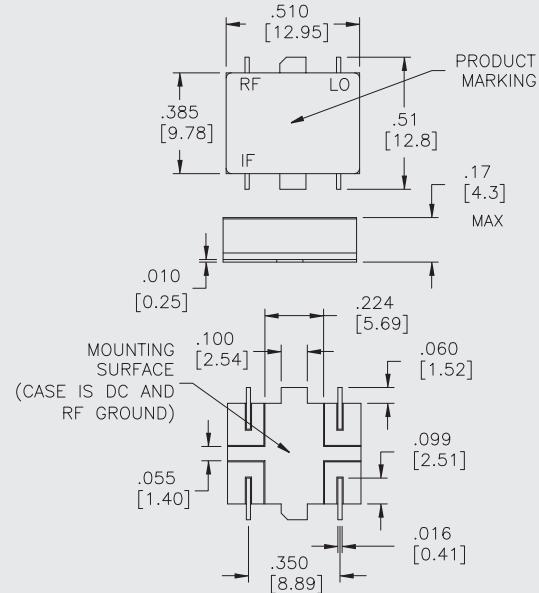

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TYPICAL PERFORMANCE

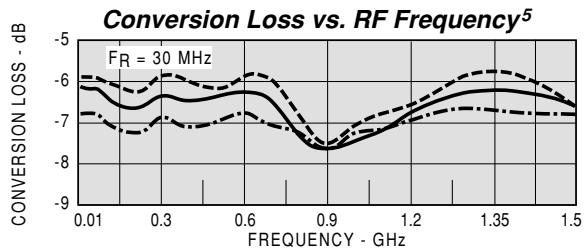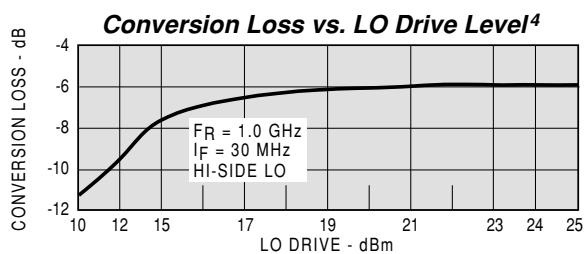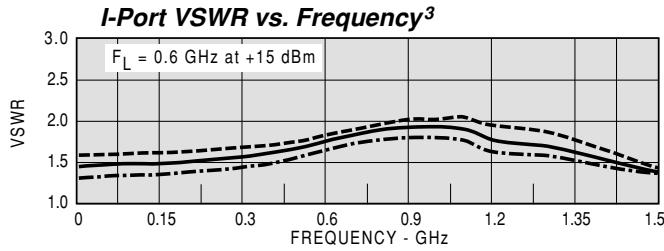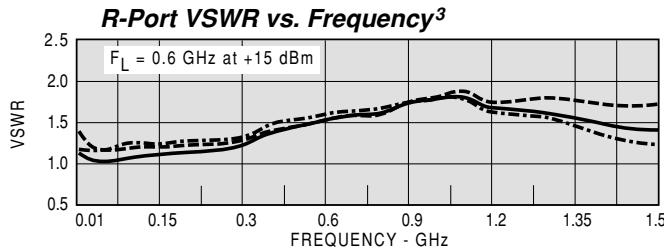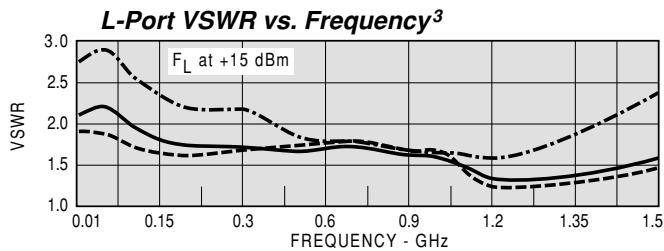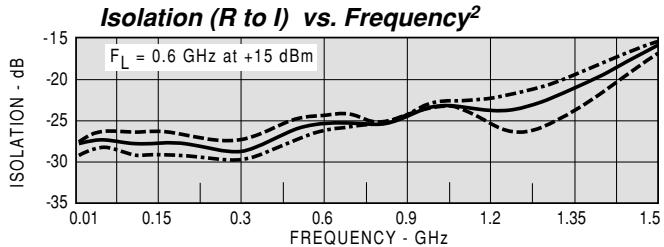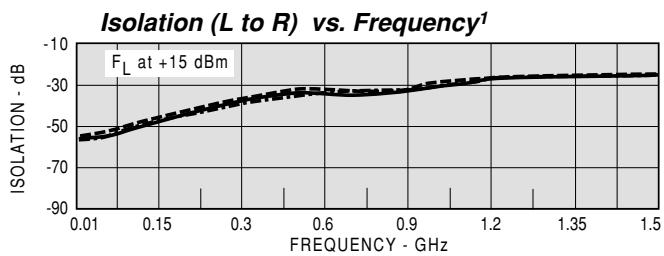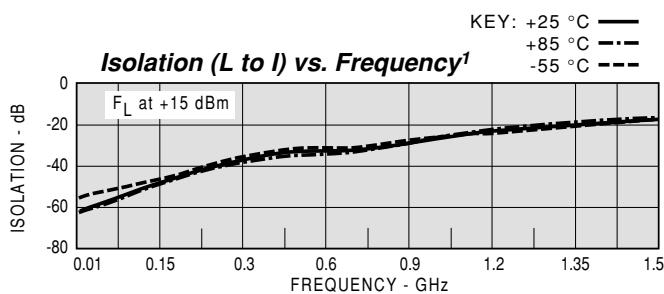

⁴ The minimum recommended drive level is +15 dBm. The maximum recommended drive level is +25 dBm.


⁵ Conversion loss of the mixer when used in an SSB system. The frequency ordinate refers to the R-port (f_R) with f_I at 30 MHz. Data plotted with an f_L level of +15.0

Harmonic Intermodulation Products (single tone)


HARMONICS OF f _R	5	91.1	90.4	91.1	90.5	90.5
5	96.4	98.2	96.3	96.6	96.2	96.2
4	95.8	90.6	90.8	91.1	90.7	90.3
3	96.7	96.4	96.0	95.4	96.4	94.8
2	86.5	81.3	83.8	70.8	86.9	89.1
1	97.8	80.1	80.5	65.7	83.9	83.0
0	38.7	43.7	75.1	55.6	86.4	68.1
	37.8	41.7	63.7	59.1	68.6	55.8
	13.0	0.0	32.9	22.9	35.7	36.3
	12.2	0.0	36.7	24.4	34.2	34.1
	-6.1	8.4	3.9	14.3	9.1	
	-4.1	12.8	6.7	17.8	12.1	

HARMONICS OF f_L

F_R = 1000 MHz @ -10 dBm F_L = 1030 MHz
F_L @ +15 dBm F_L @ +18 dBm

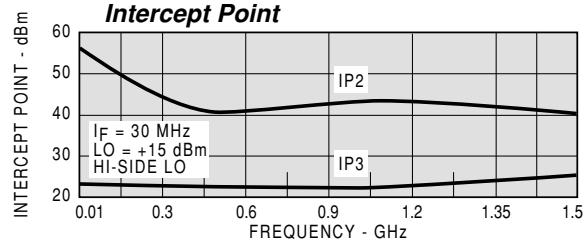

IP3

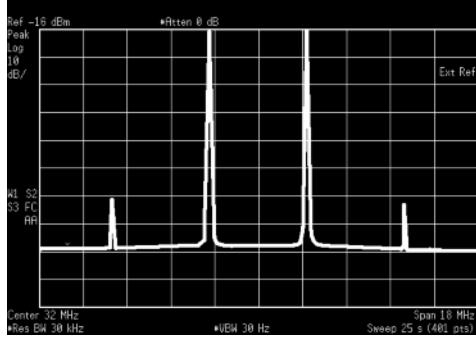

f_R = 1500/1496 MHz @ -10 dBm F_L = 1530 MHz @ +15 dBm
Vertical Scale: 10 dB/DIV

¹ Level of the f_L signal fed through to the R- and I-ports with respect to the level of the f_L signal at the L-port.

² Level of the f_R signal fed through the I-port with respect to the level of the f_R signal at the R-port.

³ VSWR of the I- and R-ports in a 50-ohm system. Some variation in the R-port VSWR will occur as a function of the L-port frequency as shown above.