

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

---



Plug-in miniature power relay, with multi-layer gold contact for high continuous currents, 1 changeover contact, input voltage 230 V AC

---

## Your advantages

- RT III-proof (wash-proof)
- Switching current of up to 16 A

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Commercial Data

Item number	2961529
Packing unit	10 pc
Minimum order quantity	10 pc
Product Key	CK6195
Catalog Page	Page 290 (C-5-2019)
GTIN	4017918937928
Weight per Piece (including packing)	16.852 g
Weight per Piece (excluding packing)	15 g
Customs tariff number	85364900
Country of origin	AT

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Technical Data

### Product properties

Product type	Single relay
Operating mode	100% operating factor
Mechanical service life	1x 10 <sup>7</sup> cycles

### Insulation characteristics

Overvoltage category	III
Pollution degree	3

### Electrical properties

Service life electrical	see diagram
Maximum power dissipation for nominal condition	0.69 W
Test voltage	5 kV AC (50 Hz, 1 min., winding/contact)

### Input data

#### Coil side

Nominal input voltage $U_N$	230 V AC
Input voltage range	179.4 V AC ... 356.5 V AC
Mains frequency	50/60 Hz
Typical input current at $U_N$	3 mA (at 50 Hz) 2.5 mA (At 60 Hz)
Typical response time	3 ms ... 12 ms (depending on phase relation)
Typical release time range	2 ms ... 9 ms (depending on phase relation)
Coil resistance	32500 $\Omega$ $\pm$ 15 % (at 20 °C)

### Output data

#### Switching

Contact type	1 changeover contact
Type of switch contact	Single contact
Drive and function	monostable
Contact material	AgNi, hard gold-plated
Maximum switching voltage	30 V AC 36 V DC
Minimum switching voltage	100 mV (at 10 mA)
Limiting continuous current	50 mA
Maximum inrush current	50 mA
Min. switching current	1 mA (at 24 V)
Interrupting rating (ohmic load) max.	1.2 W (at 24 V DC)
Switching capacity	2 A (at 24 V, AC15)

Switching: when the gold layer is destroyed

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

Note	the following values are applicable if a gold layer is destroyed
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (at 10 mA)
Limiting continuous current	16 A
Maximum inrush current	50 A (20 ms)
Min. switching current	10 mA (at 12 V)
Interrupting rating (ohmic load) max.	384 W (at 24 V DC)
	58 W (at 48 V DC)
	48 W (at 60 V DC)
	50 W (at 110 V DC)
	80 W (at 220 V DC)
	4000 VA (for 250 V AC)
Switching capacity	2 A (at 24 V, DC13)
	0.2 A (at 110 V, DC13)
	0.2 A (at 250 V, DC13)
	2 A (at 24 V, AC15)
	2 A (at 120 V, AC15)
	2 A (at 250 V, AC15)

## Connection data

Connection method	Solder connection
-------------------	-------------------

## Dimensions

Dimensional drawing	
Width	12.7 mm
Height	29 mm
Depth	15.7 mm

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

## Approval data

### Corrosive gas test

Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Standards and regulations

Standards/regulations	IEC 60664
	EN 50178
	EN 61810-1

## Mounting

Assembly instructions	Can be aligned without spacing ( $> 70\text{ °C} \geq 2.5\text{ mm}$ )
Mounting position	any


# Single relay - REL-MR-230AC/21HC AU

2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Drawings

Diagram

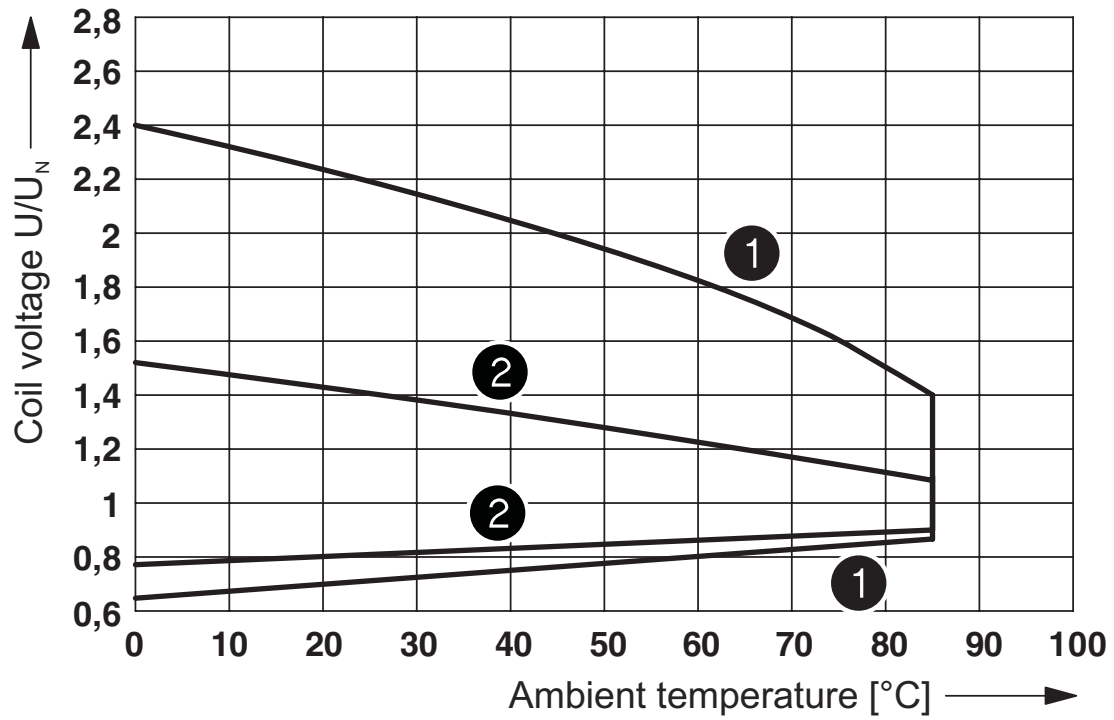

- ① DC coils
- ② AC coils

Operating voltage range


# Single relay - REL-MR-230AC/21HC AU



2961529


<https://www.phoenixcontact.com/il/products/2961529>

Diagram

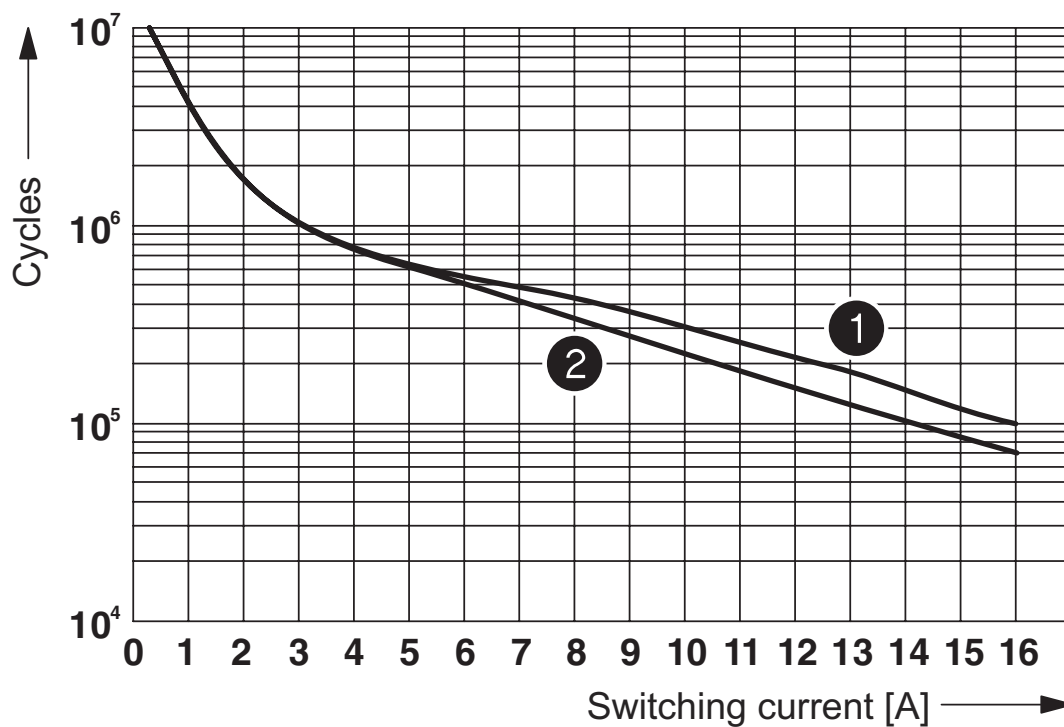

- ① 250 V AC, ohmic load (DC coils)
- ② 250 V AC, ohmic load (AC coils)


Electrical service life

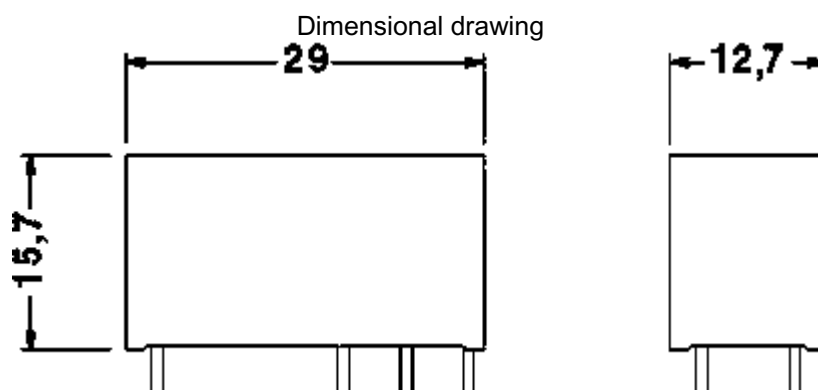

# Single relay - REL-MR-230AC/21HC AU

2961529


<https://www.phoenixcontact.com/il/products/2961529>

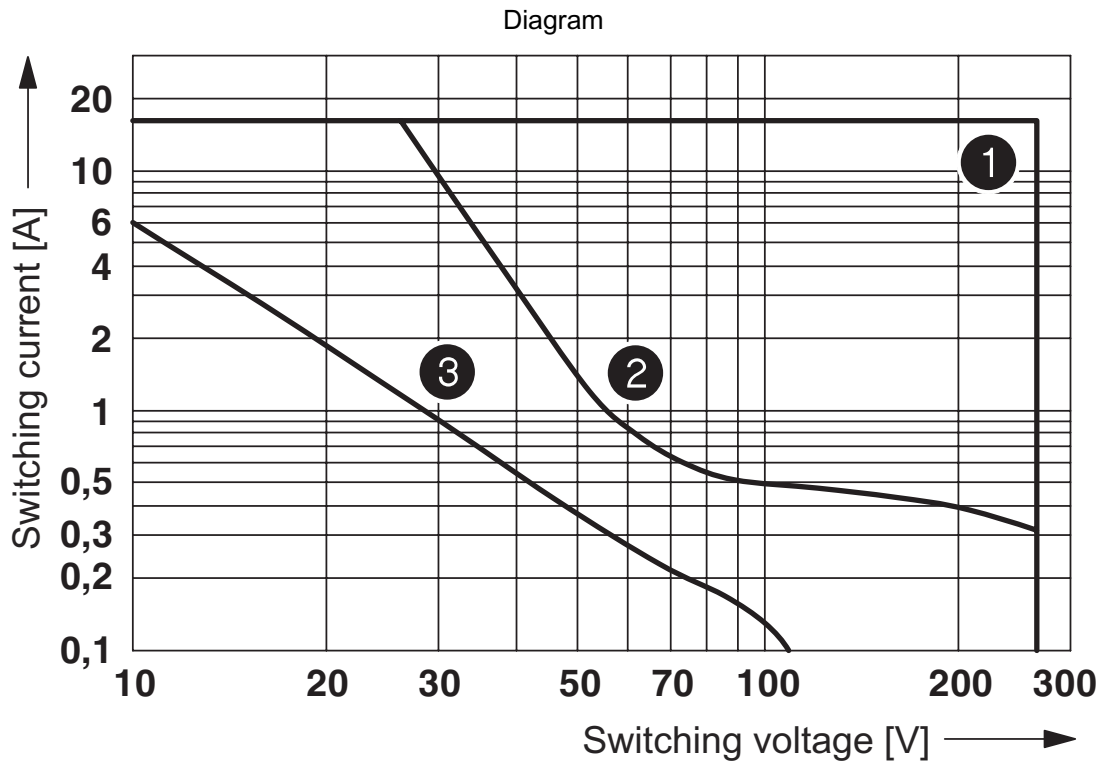

- ① AC, ohmic load
- ② DC, ohmic load
- ③ DC, L/R = 40 ms


Interrupting rating

Circuit diagram

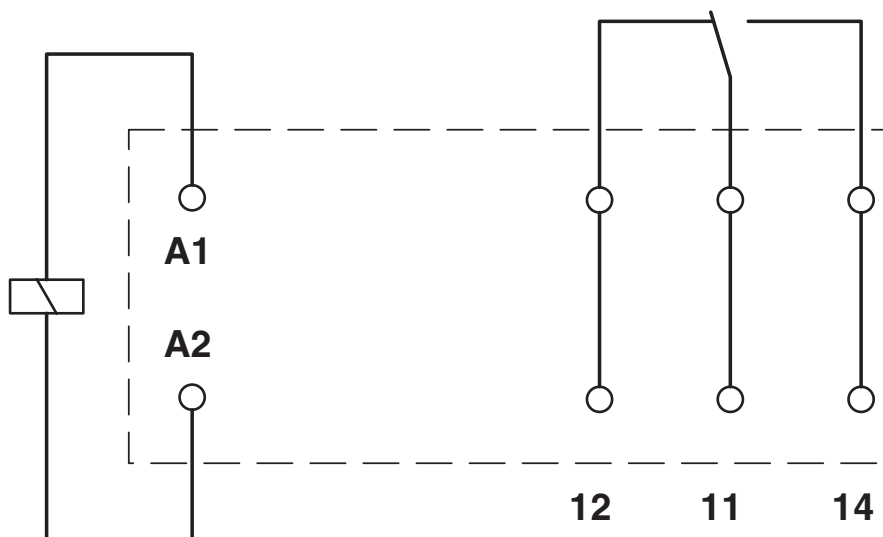




Diagram

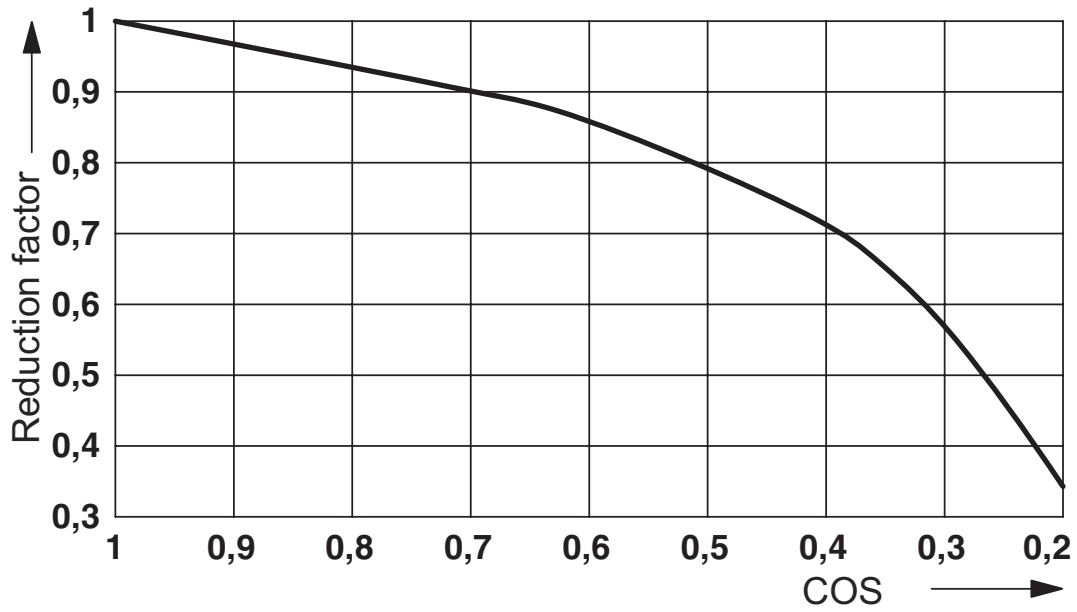

Service life reduction factor with various cos phi

Drilling plan/solder pad geometry

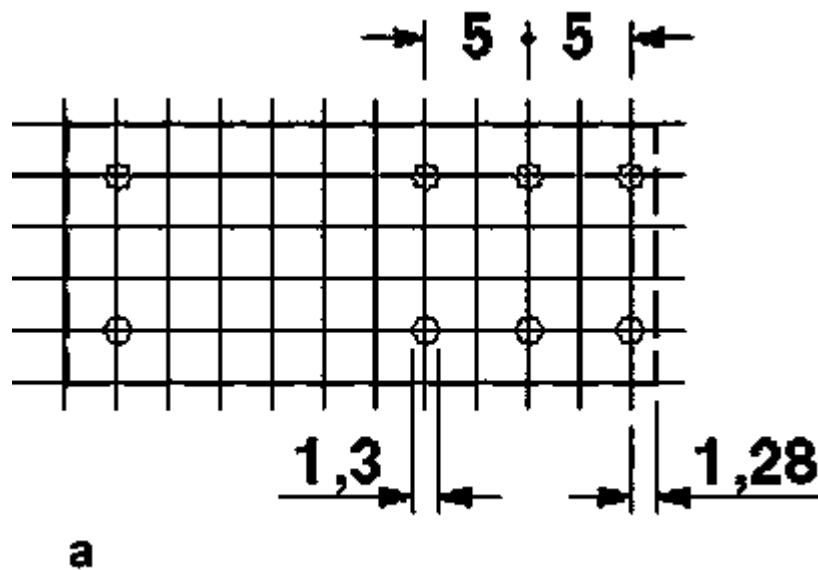

a = pitch division 2.5 mm

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Approvals



**cUL Recognized**  
Approval ID: FILE E 228652



**UL Recognized**  
Approval ID: FILE E 228652



**EAC**  
Approval ID: TR\_TS\_D\_00573\_c



**UL Recognized**  
Approval ID: FILE E 172140



**EAC**  
Approval ID: RU\*C-DE.\*08.B.00010



**VDE Zeichengenehmigung**  
Approval ID: 40007758

	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
Reports with production monitoring			-	-



**VDE Zeichengenehmigung**  
Approval ID: 40048281

	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
Reports with production monitoring			-	-



**cUL Recognized**  
Approval ID: FILE E 172140

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Classifications

### ECLASS

ECLASS-9.0	27371601
ECLASS-10.0.1	27371601
ECLASS-11.0	27371601

### ETIM

ETIM 8.0	EC001437
----------	----------

### UNSPSC

UNSPSC 21.0	39122300
-------------	----------

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Single relay - REL-MR-230AC/21HC AU



2961529

<https://www.phoenixcontact.com/il/products/2961529>

## Accessories

### Relay base

Relay base - RIF-1-BPT/2X21 - 2900931

<https://www.phoenixcontact.com/il/products/2900931>



Relay base RIF-1..., for miniature power relay with 1 or 2 changeover contacts or solid-state relays of the same design, Push-in connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

### Relay base

Relay base - RIF-1-BSC/2X21 - 2900930

<https://www.phoenixcontact.com/il/products/2900930>



RIF-1... relay base, for miniature power relay with 1 or 2 changeover contacts or identical solid-state relays, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Israel Ltd.  
P.O.B. 1799 Industrial Park Hasharon  
Quadima 60920  
+972-9-8915700  
[info@phoenixcontact.co.il](mailto:info@phoenixcontact.co.il)