

Features

- Full load power: -40 to +60°C
- Reduced load rating to 90°C
- OVC III up to 5000m and LPS
- Industry standard pinning [P12]
- Meets EN55032 “B” in PELV configuration
- Medical; household & industrial standards

Regulated Converter

Description

RACM30-K/277 AC/DC modules provide a leading thermally effective Power yield of 9.2 Watts per inch³ at 60°C still air for continuous loads of 30 Watts plus additional peak capability. These Modules operate in a temperature range of -40° to 90°C in compliance with safety standards of medical MOPP, household-, industrial, and measurement markets. Safety reports rate the series as LPS limited power source and OVCIll for an operating altitude of up to 5000m. A comfortable margin to EMI Class B limits, even with outputs connected to the ground, ease system implementation for quick time-to-market without additional external circuitry such as fuses or filters. For designers, maximum flexibility for these encapsulated, solder-mountable modules is pin-to-pin compatible with the well-established series RAC20-K. Further mechanical derivatives are potted modules with wires or a panel mount option with spring-clamp connectors which is convertible to DIN-Rail mounting via available RECOM Clip accessory.

Selection Guide

Part Number	Input Voltage Range [VAC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ ⁽¹⁾ [%]	Max. Capacitive Load ⁽²⁾ [µF]
RACM30-05SK/277	85-305	5	6000	86	10000
RACM30-12SK/277	85-305	12	2500	90	10000
RACM30-15SK/277	85-305	15	2000	90	10000
RACM30-24SK/277	85-305	24	1250	89	8000
RACM30-12DK/277	85-305	±12	±1250	86	±8000
RACM30-15DK/277	85-305	±15	±1000	86	±8000


Notes:

Note1: Efficiency is tested at 230VAC input and constant resistive load at +25°C ambient
 Note2: Max Cap Load is tested at nominal input and full resistive load

Accessible Part

Part Number	Description	Datasheet Link
R-DR/CLIP	Din Rail mounting clip	R-DR/CLIP.pdf

Model Numbering

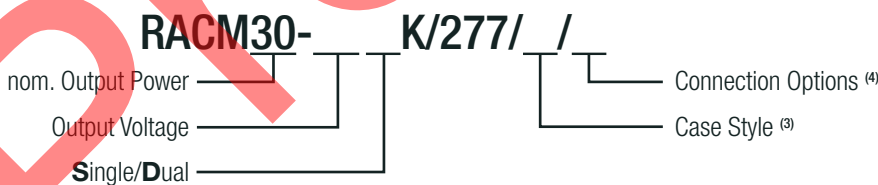

Notes:

Note3: standard without suffix= encapsulated, solder mountable version with pins
 add suffix “/W” for wired version (single output only)
 add suffix “/PMP” = Panel mount version with push-in terminals (single output only)
 For other case/connection/footprint options, please contact RECOM technical support.

Ordering Examples:

RACM30-12DK/277	12Vout	Dual	encapsulated & potted	standard THT
RACM30-12SK/277/W	12Vout	Single	encapsulated & potted	wired
RACM30-12SK/277/PMP	12Vout	Single	panel mount	push-in terminals

RECOM

AC/DC Converter

RACM30-K/277

30 Watt Single/Dual Output



IEC/EN62368-1 certified
 EN60335-1 certified
 ANSI/AAMI/IEC/EN 60601-1 certified
 CAN/CSA-C22.2 No. 60601-1:14 certified
 IEC/EN60601-1 certified
 IEC/EN61010-1 certified
 IEC/EN61558-1 certified
 EN61558-2-16 certified
 EN62233:2008 certified
 EN60601-1-2 compliant
 EN61204-3 compliant
 EN55032 compliant
 EN55014-1/-2 compliant
 CB Report

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Nominal Input Voltage	60/50Hz	100VAC		277VAC
Operating Range ⁽⁵⁾	47-63Hz	85VAC	230VAC	305VAC
	DC	120VDC		431VDC
Input Current	115VAC			650mA
	230VAC			350mA
	277VAC			300mA
Inrush Current	cold start	115VAC		20A
		230VAC		30A
		277VAC		36A
No load Power Consumption	230VAC			100mW
Ecodesign Standby Mode Use (Available output power for stated input power)	V _{IN} = 230VAC	P _{IN} = 0.3W		0.22W
		P _{IN} = 0.5W		0.39W
		P _{IN} = 1W		0.79W
Input Frequency Range		47Hz		63Hz
Minimum Load		0%		
Power Factor	115VAC		0.60	
	230VAC		0.50	
	277VAC		0.45	
Start-up Time				150ms
Rise Time				30ms
Hold-up Time	230VAC	50ms		
Internal Operating Frequency	100% load at nominal Vin			100kHz
Output Ripple and Noise ⁽⁶⁾	20MHz BW			100mVp-p


Notes:

Note5: The products were submitted to all safety files at AC-operation, and to IEC/EN61010-1 for DC-operation.


Note6: Measurements are made with a 0.1µF MLCC & 10µF E-cap in parallel across output. (low ESR)

RACM30-05SK/277

Efficiency vs. Load

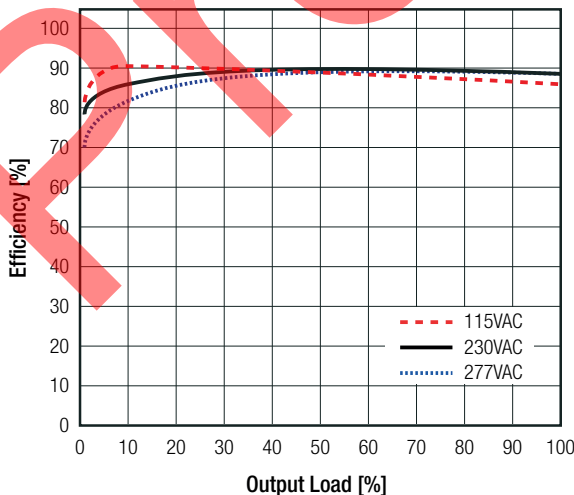

Power Dissipation vs. Load

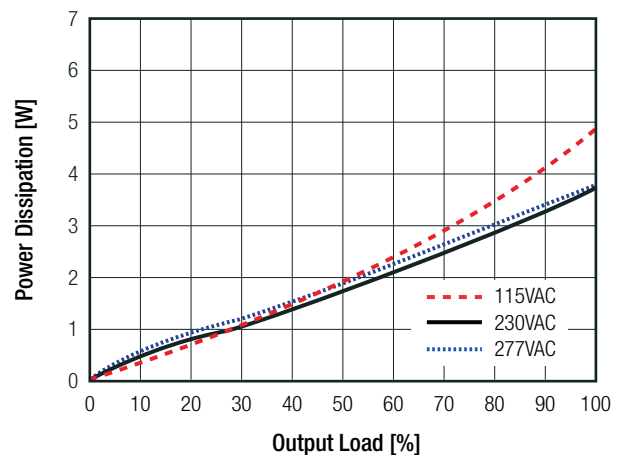


continued on next page


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

RACM30-12SK/277
RACM30-15SK/277

Efficiency vs. Load

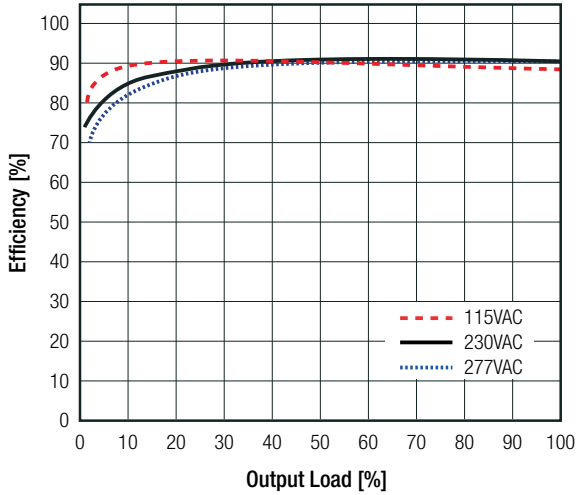


Power Dissipation vs. Load

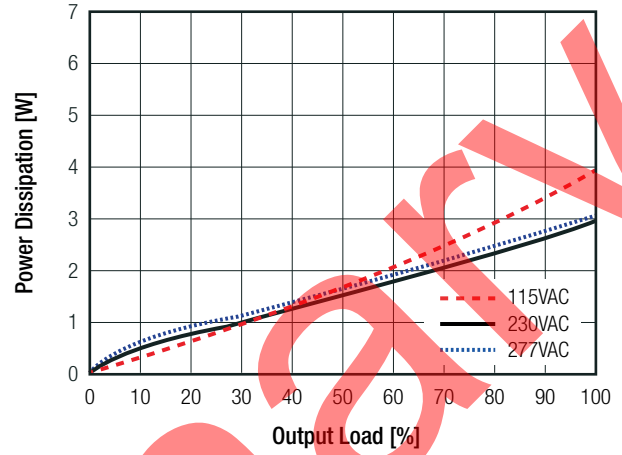


RACM30-24SK/277

Efficiency vs. Load

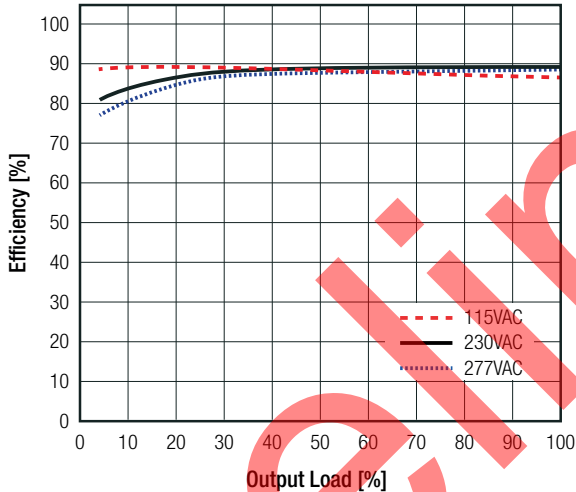


Power Dissipation vs. Load

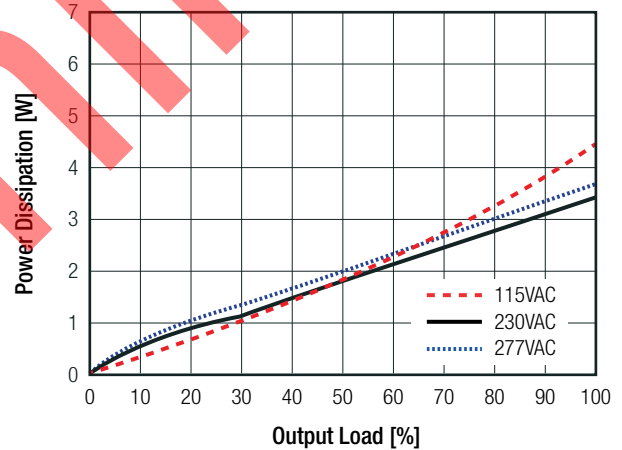


RACM30-12DK/277
RACM30-15DK/277

Efficiency vs. Load

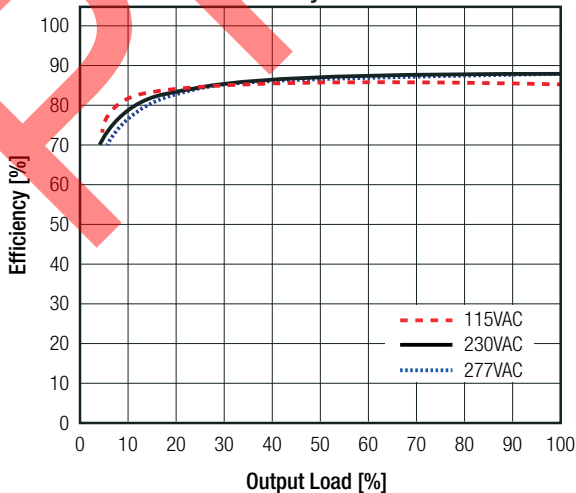

Power Dissipation vs. Load

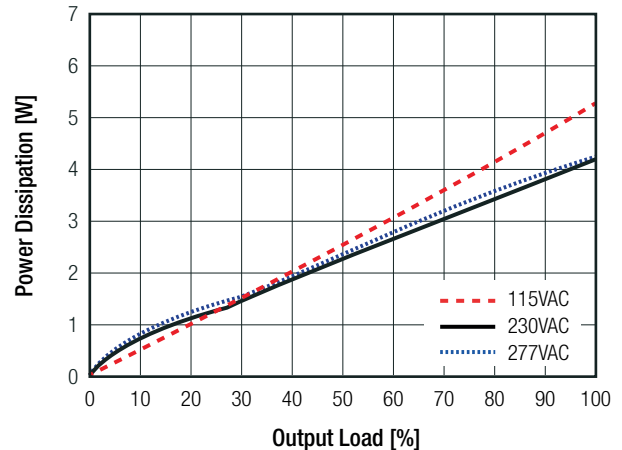

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

REGULATIONS

Parameter	Condition		Value
Output Accuracy	single output		±2.0% typ.
	dual output		±3.0% typ.
Line Regulation	low line to high line	5Vout	±1.0% typ.
		others	±0.5% typ.
Load Regulation ⁽⁷⁾	10% to 100% load	5Vout	±3.0% typ.
		others	±1.0% typ.
Cross Regulation	dual output only		±10.0% typ.
Transient Response	25% load step change		4.0% max.
	recovery time		500µs typ.

Notes:

Note7: Operation below 10% load will not harm the converter, but specifications may not be met

PROTECTIONS

Parameter	Type		Value
Input Fuse ⁽⁸⁾	internal		T3.15A, slow blow type
Short Circuit Protection (SCP)			hiccup, auto recovery
Over Voltage Protection (OVP)			150% - 195%, hiccup mode
Over Current Protection (OCP)			<180%, hiccup mode
Over Voltage Category (OVC)			OVCIII 5000m
DC OK LED	only for "/PMP" and "/PMPD" version		green
Class of Equipment			Class II
Isolation Voltage ⁽⁹⁾	I/P to O/P, I/P to Case, O/P to Case	1 minute	4kVAC
Isolation Resistance	V _{iso} = 500VDC		1GΩ min.
Isolation Capacitance	I/P to O/P, 100kHz/0.1V		100pF max.
Insulation Grade			reinforced
Leakage Current			100µA max.

Notes:

Note8: For system integration with DC operation, consider a suitable DC fuse in front of the input

Note9: For repeat Hi-Pot testing, reduce the time and/or the test voltage

ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	@ natural convection <0.1m/s	refer to "Derating Graph"	-40°C to +90°C
Maximum Case Temperature			+110°C max.
Temperature Coefficient			0.02%/K
Operating Altitude ⁽¹⁰⁾			5000m
Operating Humidity	non-condensing		90% RH max.
Polution Degree	potted version		PD3
Vibration	according to MIL-STD-202G		10-500Hz, 2G 10min./1cycle, period 60min. each along x,y,z axes

Notes:

Note10: Recognized by safety agency for safe operation up to 5000m. High altitude operation may impact the performance and lifetime.



continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Parameter	Condition		Value	
MTBF	according to MIL-HDBK-217F, G.B.		+25°C	>1357 x 10 ³ hours
			+40°C	>1096 x 10 ³ hours
Design Lifetime	230VAC/50Hz and full load	Single Output	5Vout	>30 x 10 ³ hours
			others	
		Dual Output	+40°C	>30 x 10 ³ hours
			+50°C	>17x 10 ³ hours

Derating Graph

(@ Chamber and natural convection 0.1 m/s)

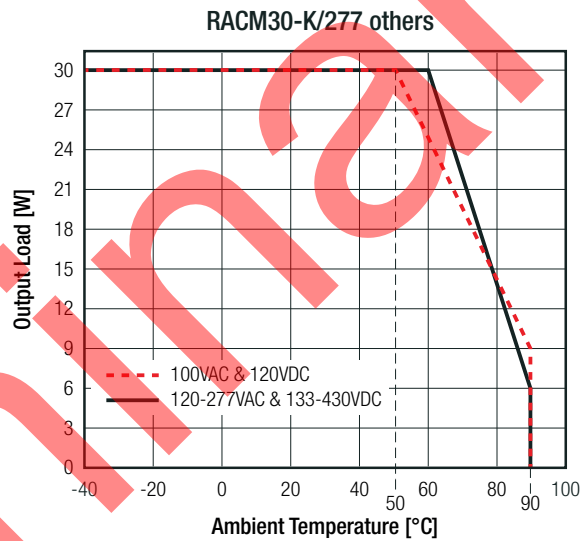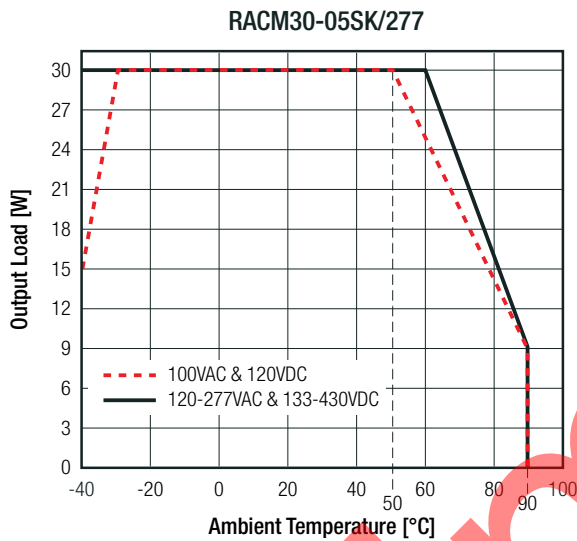

PEAK LOAD CAPABILITY (single output only)

Calculation:

- P_p = peak output power [W]
- P_r = recovery output power [W]
- t_1 = peak time set (10s max.) [s]
- t_2 = recovery time (min. 5 x t_1) [s]
- k = safety factor 1.1 []

Maximum Peak Power

RACM30-05SK/277	RACM30-15SK/277
RACM30-12SK/277	RACM30-24SK/277
33W	36W


$$P_r = \frac{30 \times (t_1 + t_2) - (P_p \times t_1)}{t_2 \times k}$$

Practical Example (RACM30-24SK/277):

Take the RACM30-24SK/277 at 230VAC input Voltage and full load at $T_{AMB} = 25^\circ\text{C}$, with natural convection.

- $P_p = 36\text{W}$
- $t_1 = 10\text{s}$
- $t_2 = 50\text{s}$
- $k = 1.1$

$$P_r = \frac{30 \times (10 + 50) - (36 \times 10)}{50 \times 1.1} = 26.2\text{W}$$

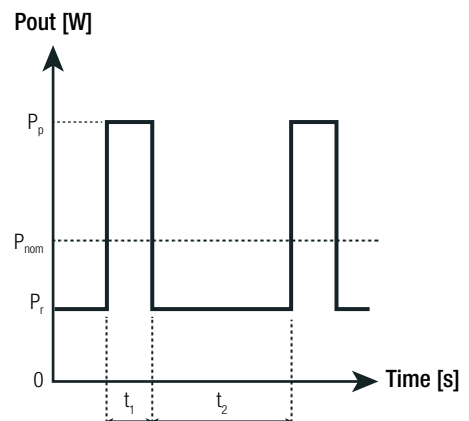

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report Number	Standard
Audio/Video, information and communication technology equipment - Part1: Safety requirements	64.210.22.02737.01	EN62368-1:2014+A11:2017 (2nd Edition)
Audio/Video, information and communication technology equipment - Safety requirements (CB)	085-220273601-000	IEC62368-1:2018 (3rd Edition)
Audio/Video, information and communication technology equipment - Safety requirements (LVD)		EN IEC 62368-1:2020+A11:2020 (3rd Edition)
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements (CB)	085-220277601-000	IEC61010-1:2010+A1:2016 3rd Edition with IEC61010-2-201:2017
Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements (LVD)	64.240.22.02776.01	EN61010-1:2010+A1:2019 with EN IEC 61010-2-201:2018
Medical electrical equipment Part 1: General requirements for basic safety and essential performance (CB)	22SBDS06094-02771	IEC60601-1:2005+AM1:2012 3rd Edition
Medical electrical equipment Part 1: General requirements for basic safety and essential performance (LVD)		EN60601-1:2006+A1:2013+AC:2014
Medical electrical equipment Part 1: General requirements for basic safety and essential performance	E314885	ANSI/AAMI ES60601-1:2005+A2:2010/(R)2012 CAN/CSA-C22.2 No. 60601-1:14 3rd Edition
Household and similar electrical appliances – Safety – Part 1: General requirements (CB)	64.260.22.02739.01	IEC60335-1:2010+C1:2016 5th Edition
Household and similar electrical appliances – Safety – Part 1: General requirements (LVD)		EN60335-1:2012+A2:2019+A15:2021
Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure		EN62233:2008
Safety of power transformers, power supplies, reactors & similar products for supply voltages up to 1100V	085-220273801-000	IEC61558-1:2017 3rd Edition
Safety of power transformers, power supplies, reactors & similar products for supply voltages up to 1100V Part 2: Particular requirements		IEC61558-2-16:2009+A1:2013 1st Edition
Safety of power transformers, power supplies, reactors & similar products for supply voltages up to 1100V	64.250.22.02738.01	EN IEC 61558-1:2019
Safety of power transformers, power supplies, reactors & similar products for supply voltages up to 1100V Part 2: Particular requirements		EN61558-2-16:2009+A1:2013
RoHS2		RoHS-2011/65/EU + AM-2015/863
EMC Compliance according to EN60601-1-2		
	Condition	Standard / Criterion
Medical electrical equipment Part 1-2: General requirements for basic safety and essential performance		EN60601-1-2:2015+A1:2021, Class B
ESD Electrostatic discharge immunity test	Air: ±2, 4, 8, 15kV Contact ±8kV	EN61000-4-2:2008 IEC61000-4-2:2009
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-2700MHz); table 9	IEC/EN61000-4-3:2006 + A2:2010
Fast Transient and Burst Immunity	L, N, L-N: ±2kV	IEC/EN61000-4-4:2012
Surge Immunity	L, N, L-N: ±0.5, 1, 2kV	IEC/EN61000-4-5:2014 + A1:2017
Immunity to conducted disturbances, induced by radio-frequency fields	3Vrms (0.15-80MHz); 6Vrms (ISM and amateur radio bands within 0.15-80MHz)	IEC61000-4-6:2013 EN61000-4-6:2014
Voltage Dips	100% (0.5P, 1.0P); 30% (25P/30P)	IEC/EN61000-4-11:2004 + A1:2017
Voltage Interruptions	100% (250P/300P)	IEC/EN61000-4-11:2004 + A1:2017
EMC Compliance according to EN35032/EN35035		
	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements		EN55032:2015, Class B
Electromagnetic compatibility of multimedia equipment – Immunity requirements		EN55035:2017+A11:2020
Radiated, radio-frequency, electromagnetic field immunity test	3V/m (1800, 2600, 3500, 5000MHz)	IEC/EN61000-4-3:2006 + A2:2010, Criteria A
Fast Transient and Burst Immunity	L, N, L-N: 2kV DC load line: 0.5kV	IEC/EN61000-4-4:2012, Criteria A

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

EMC Compliance according to EN35032/EN35035	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements		EN55032:2015, Class B
Electromagnetic compatibility of multimedia equipment – Immunity requirements		EN55035:2017+A11:2020
Radiated, radio-frequency, electromagnetic field immunity test	3V/m (1800, 2600, 3500, 5000MHz)	IEC/EN61000-4-3:2006 + A2:2010, Criteria A
Fast Transient and Burst Immunity	L, N, L-N: 2kV DC load line: 0.5kV	IEC/EN61000-4-4:2012, Criteria A
EMC Compliance according to EN IEC61204-1	Condition	Standard / Criterion
Low voltage power supplies, d.c. output Part 3: Electromagnetic compatibility		EN IEC 61204-3:2018
ESD Electrostatic discharge immunity test	Air: ±2, 4, 8kV Contact ±4kV	EN61000-4-2:2008, Criteria A IEC61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-1000MHz); 3V/m (1400-2000MHz); 1V/m (2000-2700MHz)	IEC/EN61000-4-3:2006+A2:2010, Criteria A
Fast Transient and Burst Immunity	L-N: ±2kV	IEC/EN61000-4-4:2012, Criteria B
Surge Immunity	L-N: ±0.5, 1, 2kV	IEC/EN61000-4-5:2014+A1:2017, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	10Vrms (0.15-80MHz)	IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	30A/m	IEC61000-4-8:2009, Criteria A EN61000-4-8:2010, Criteria A
Voltage Dips	100% (0.5P, 1.0P); 20% (250P/300P); 30% (25P/30P)	IEC/EN61000-4-11:2004 + A1:2017, Criteria A
Voltage Interruptions	100% (250P/300P)	IEC/EN61000-4-11:2004 + A1:2017, Criteria B
Limits of Harmonic Current Emissions	N/A (<75W)	EN IEC 61000-3-2:2019
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013+A1:2019
EMC Compliance according to EN55014-1/EN55014-2	Condition	Standard / Criterion
Electromagnetic compatibility of household appliances, electric tools and similar apparatus - Emission Requirements		EN55014-1:2006 + A2:2011
Electromagnetic compatibility of household appliances, electric tools and similar apparatus - Immunity Requirements		EN55014-2:2015
Immunity to conducted disturbances, induced by radio-frequency fields	3Vrms (0.15-230MHz)	IEC61000-4-6:2013, Criteria A EN61000-4-6:2014, Criteria A



DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case/baseplate	plastic, (UL94V-0)
	potting	PU, (UL94V-0)
	PCB	FR4, (UL94V-0)
Dimension (LxWxH)	standard THT type, "/W" type	52.5 x 40.0 x 25.5mm
	"/PMP" type	84.7x 40.0 x 33.0mm
Weight	standard THT type	93g
	"/W" type including wires	98g
	"/PMP" type	122g

continued on next page



Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Dimension Drawing standard THT version (mm)

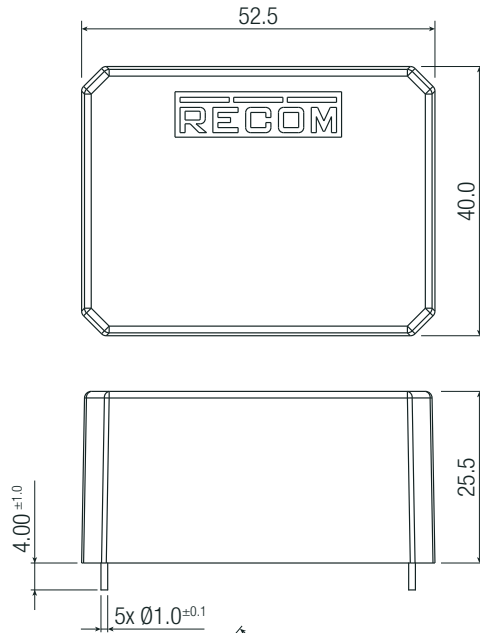



Pinning information [P12]

Pin #	Single	Dual
1	VAC in (N)	VAC in (N)
2	VAC in (L)	VAC in (L)
3	no pin	-Vout
4	-Vout	Com
5	+Vout	+Vout

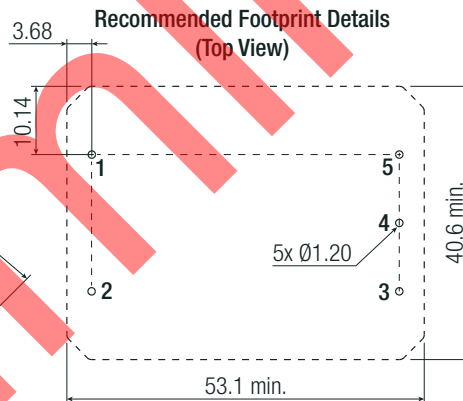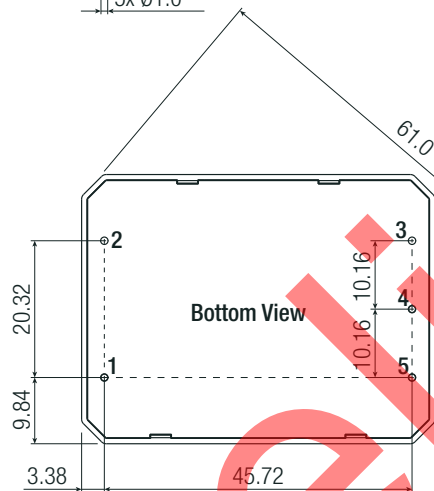

Tolerance:
x.x= ±0.5mm
x.xx= ±0.25mm

Dimension Drawing Wired version "W" (mm)

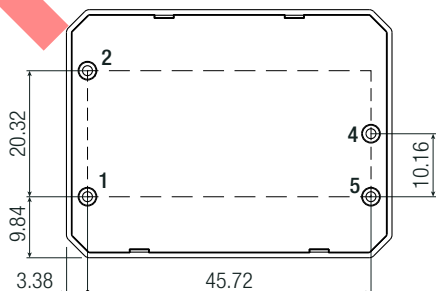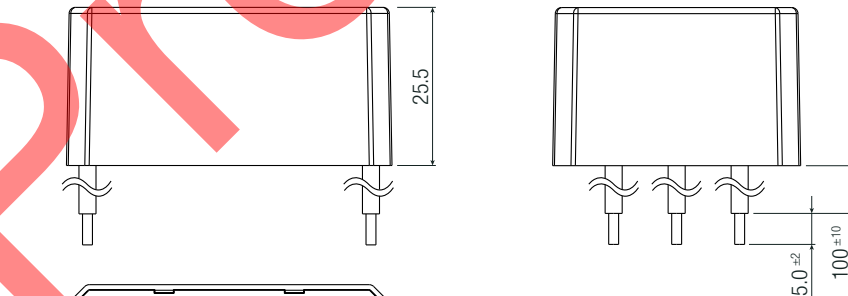


Wire information

#	Function	Wire color	Type	AWG
1	VAC in (N)	blue	UL-1015	18
2	VAC in (L)	brown	UL-1015	18
4	-Vout	black	UL-1015	18
5	+Vout	red	UL-1015	18

Tolerance:
x.x= ±0.5mm
x.xx= ±0.25mm

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Dimension Drawing Panel Mount "/PMP" (mm)

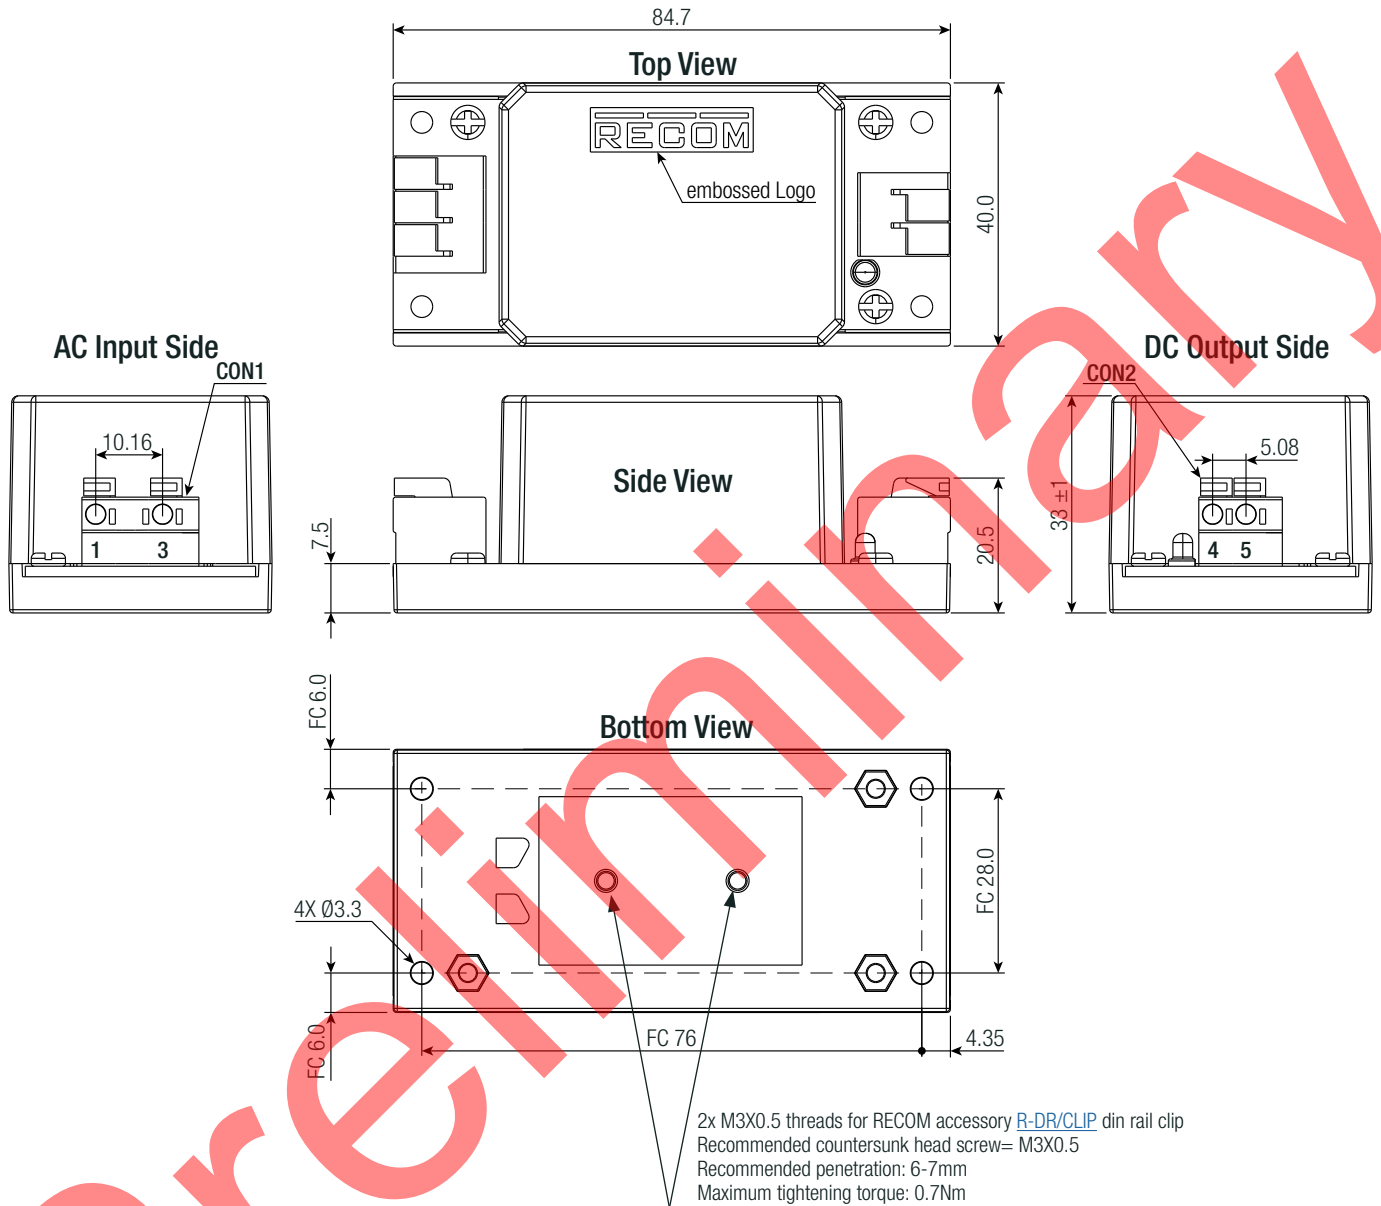

Push-in Spring Terminal

AC Input (CON1)

Degson (DG142R-5.08-03P-2Y)

DC Output (CON2)

Degson (DG142R-5.08-02P-2Y)

Push-In Spring Information

#	Function	Pitch
AC Input (CON1)		
1	VAC in (L)	pin2 removed, 2pins
3	VAC in (N)	with 10.16mm pitch
DC Output (CON2)		
4	+Vout	2 pins
5	-Vout	with 5.08mm pitch

Wire stripping length: 11mm

Rated AWG: 22-16 (0.2-1.5mm²)


FC= fixing centers

Tolerance:
x.x= ±0.5mm
x.xx=0.25mm

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

INSTALLATION AND APPLICATION

Dimension Drawing RACM30-K/277/PMP after conversion with the RECOM Din Rail Clip "R-DR/CLIP" accessory part

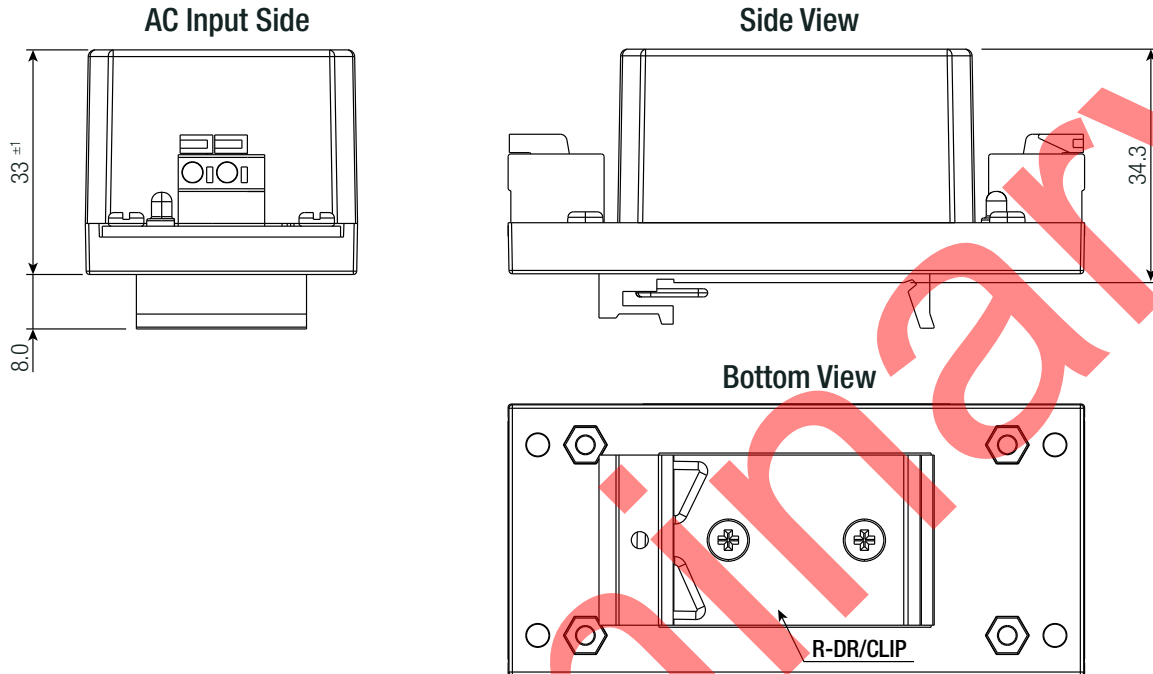

For further information, refer to our R-DR/CLIP datasheet: www.recom-power.com/pdf/Accessories/R-DR/CLIP.pdf

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Dimension (LxWxH)	tube	standard THT	490.0 x 56.0 x 40.0mm
	tray	wired "/W"	405.0 x 360.0 x 55.0mm
		"/PMP"	405.0 x 360.0 x 55.0mm
Package Unit	standard THT		11pcs
	wired "/W"		24pcs
	"/PMP"		24pcs
Storage Temperature Range	non-condensing		-40°C to +90°C
Storage Humidity			95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.