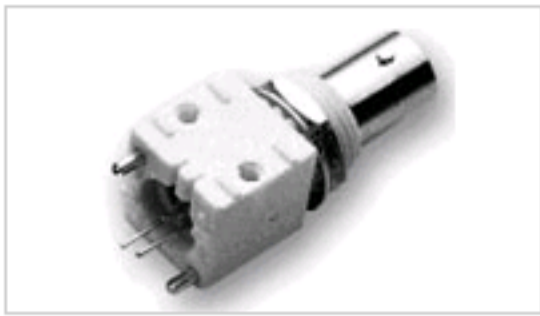


1-1634505-0 Product Details

[Share](#) [Print](#) [Email](#)


BNC RF Connectors

BNC Ins Str PCB Skt 50Ohm Black
1-1634505-0

TE Internal Number: 1-1634505-0

Active
[View 3D PDF](#)

Product Highlights [View All](#)

- Connector - RF
- Jack
- Connector Style = Jack
- Applies To Printed Circuit Board
- Body Style = Straight

- [Pricing & Availability](#)
- [Request Sample](#)
- [Add to My Part List](#)
- [Buy Product through Distributor](#)

Feedback

[Documents](#) | [Features](#) | [Compliance](#)

Please Note:
 Use the Product Drawing for all design activity

Product Type Features	
Product Type	Connector - RF
Gender	Jack
PCB Mounting Orientation	Vertical
Grade	Commercial
PCB Mount Retention	With
PCB Mount Retention Type	Solder Tail (Pin)
Mounting Post Style	Straight
Sealed	No
Isolated	Yes
Dielectric Material	Polyethylene
Color	Black

Mechanical Attachment	
Surface Mountable	No
Hardware Included	No
Panel Mount Retention	With
Panel Mount Retention Type	Bulkhead, Hex Nut
Panel Attachment Style	Rear Mount
Panel Cutout	12.0mm x 12.9mm D-Shape

Electrical Characteristics	
Connector Impedance (Ω)	50

Dimensions	
PCB Height (mm [in])	34.90 [1.374]
Mounting Post Length (mm [in])	4.30 [0.169]
Panel Thickness (mm [in])	1.50 - 5.50 [0.059 - 0.217]
PCB Tail Length (mm [in])	4.30 [0.169]
PCB Thickness, Recommended (mm [in])	3.20 [0.126]

Body Features	
Body Style	Straight
Body Material	Zinc
Body Plating	Nickel
Body Insulation	With
Polarized	No
Flange and Thread Material	PBT Polyester
Flange and Thread Material Color	Black

Contact Features	
Center Contact Material	Brass
Center Contact Plating	Gold

Housing Features	
Connector Style	Jack
Housing Material	PBT GF

Configuration Features	
Number of Ports	1
Solder Terminal	With

Industry Standards	
Government/Industry Qualification	No
RoHS/ELV Compliance	RoHS compliant, ELV compliant
Lead Free Solder Processes	Wave solder capable to 260°C, Wave solder capable to 240°C, Wave solder capable to 265°C
RoHS/ELV Compliance History	Always was RoHS compliant

Environmental	
Operating Temperature (Max.) (°C)	85

Conditions for Usage	
Applies To	Printed Circuit Board
For Use With	ZDC/BNC Connector

Packaging Features	
Packaging Method	Individual

Other	
Brand	Greenpar

Related Products

Not quite the product you're looking for?
[Find Similar Products](#)

[View Part in Product Feature Selector](#)

[Check for Tooling](#)

- Corporate Information**
- [About TE](#)
 - [Investors](#)
 - [News Room](#)
 - [Supplier Portal](#)
 - [Careers](#)
 - [Terms & Conditions](#)
 - [Privacy Policy](#)
 - [Global Accessibility Statement](#)

- Quick Links**
- [Distributor Inventory](#)
 - [Product Cross Reference](#)
 - [Documents & Drawings](#)
 - [Product Compliance Support Center](#)
 - [Site Map](#)

- Customer Support**
- [Email or Chat With Us](#)
 - [Find a Phone Number](#)
 - [Knowledge Base](#)
 - [Manage Your Account](#)

Keep Me Informed