




**+** TERMINALS & SPLICES  
RINGS & SPADES

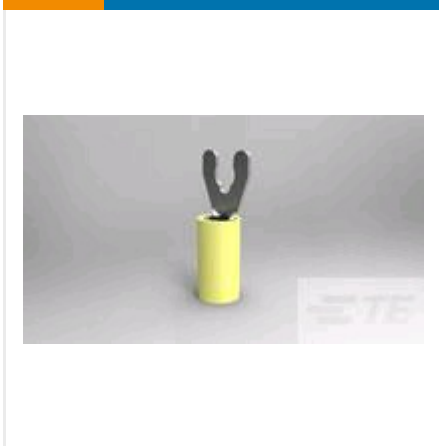

✓ Active

TE CONNECTIVITY (TE)

## TERMINAL,PIDG SPR SPD 26-22 8

PIDG

52925

TE Internal Number: 52925

Alias ID: AMPS-0-0052925-0, E66977-000

EU RoHS Compliant

EU ELV Compliant

**Terminal Type** Spring Spade

**Stud Diameter** 4.17 mm [ .164 in ]

**Tongue Thickness** .5 mm [ .0197 in ]

**Wire Size (AWG)** 26 – 22

**Wire Size (mm<sup>2</sup>)** .12 – .4

 **PRODUCT DRAWING**  
English

### DOCUMENTATION

Product Drawings

#### **WIRE TERMINAL, PIDG, SPRING SPADE WIRE SIZE: 26-22**

PDF (TIFF AVAILABLE)

**English**

Product Specifications

Application Specification

#### **Pre-Insulated Diamond Grip (PIDG) Terminals, Splices, And End Caps**

PDF

**English**

Instruction Sheets

Instruction Sheet (U.S.)

## AMP\* PIDG\* (VINYL) & PLASTI-GRIP\* SHORT SPRING SPADE TERMINALS FOR BAR

TIF

English

## AMP\* PIDG\* (VINYL) & PLASTI-GRIP\* SHORT SPRING SPADE TERMINALS FOR BAR

PDF

English

Agency Approvals

UL Report

## WIRE CONN, TERMINALS, BUTT AND PARALLEL CONNECTORS-PLASTI-GRIP, SOLISTRAND, STD B, DIAMOND GRIP, PIDG AND AMPOWER REPORT

PDF

English

CSA Certificate

## PIDG TERMINALS AND SPLICES

PDF

English

## FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

### Product Type Features

**Sealable** No

**Barrel Type** Closed Barrel

**Wire/Cable Type** Regular Wire

**Insulated** Yes

**Insulated Wire Support** Yes

**Support Style** Insulation Support

**Stud Size** 8, M4

**Barrel Style** Standard

**Shape Code** SPADE-028

**Wire/Cable Composition** Solid or Stranded

### Configuration Features

**Terminal Angle** Straight

### Electrical Characteristics

**Voltage (Max) (V)** 300

### Body Features

**Body Style** Short

**Plating Material** Phosphor Bronze, Tin

**Insulation Sleeve Material** Nylon

**Insulation Sleeve Color** Yellow

**Insulation Material** Nylon

**Inspection Slot** No

## Contact Features

**Terminal Type** Spring Spade  
**Terminal Orientation** Straight

---

## Dimensions

**Stud Diameter** 4.17 mm [ .164 in ]  
**Tongue Thickness** .5 mm [ .0197 in ]  
**Wire Size (AWG)** 26 – 22  
**Wire Size (mm<sup>2</sup>)** .12 – .4  
**Wire Insulation Diameter (Max)** 2.08 mm [ .082 in ]  
**Wire Insulation Diameter (in)** .05 – .082  
**Wire Size (CMA)** 202 – 810  
**Barrel Inside Diameter (in)** .84 – .86  
**Overall Length (in)** .651

---

## Operation/Application

**Heavy Duty** No

---

## Industry Standards

**Government Qualified** No

---

## Packaging Features

**Packaging Method** Loose Piece  
**Packaging Quantity** 1000

---

## Other

**Barrel Color** Yellow

---

## PRODUCT COMPLIANCE



Statement of Compliance

**Statement of Compliance**

PDF

---