


**641936 -1 Product Details**

**Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

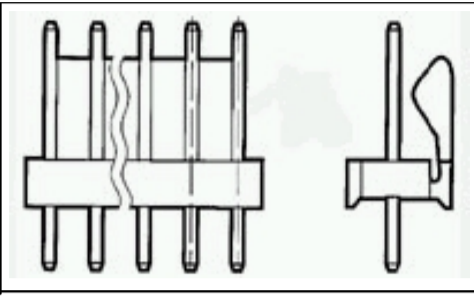

**641936 -1**

✓ [Active](#)

**MTA, CST -100 II, MT -6 and SL Connectors and Headers**

[Always EU RoHS/ELV Compliant](#) ( [Statement of Compliance](#) )

**Product Highlights:**

- ? MTA-156 Connectors
- ? Number of Positions = 9
- ? Mating Type = Header
- ? Wire -to -Board Application
- ? 3.96 mm Contact Centerline Spacing

[View all Features](#) | [Find Similar Products](#)

**Quick Links**

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

**Documentation & Additional Information**

**Product Drawings:**

- ? [ASSEMBLY, MTA-156 HEADER, FRICTION LOCK, STRAIGHT .0...](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- ? None Available

**Product Specifications:**

- ? None Available

**Application Specifications:**

- ? None Available

**Instruction Sheets:**

- ? None Available

**CAD Files:**

- ? None Available

**Additional Information:**

- ? [Product Line Information](#)

**Related Products:**

- ? [Tooling](#)

[List all Documents](#)

**Product Features** (Please use the Product Drawing for all design activity)

**Product Type Features:**

- ? [Product Type](#) = MTA -156 Connectors
- ? [Number of Positions](#) = 9
- ? [Mating Type](#) = Header
- ? [PCB Mount Angle](#) = Vertical
- ? PCB Retention Feature = No
- ? [Mating Polarization](#) = Without
- ? [Mating Connector Lock](#) = With
- ? [Four Points of Contact](#) = Without
- ? [Shrouded](#) = No
- ? [Mounting Ears](#) = Without
- ? Mating Connector Lock Type = Friction Lock
- ? PCB Thickness (mm [in]) = 1.60 [0.063]
- ? Post Size (mm [in]) = 1.14 [.045]

**Mechanical Attachment:**

- ? [Panel Attachment](#) = Without

**Electrical Characteristics:**

- ? Current Rating (Amps.) = 7
- ? Voltage Rating (VAC) = 600

**Termination Related Features:**

- ? [Solder Tail Contact Plating](#) = Tin
- ? Termination (Solder) Post Length (mm [in]) = 3.18 [0.125]

**Body Related Features:**

- ? [Narrow](#) = No
- ? [Post Number\(s\) Omitted](#) = 3
- ? Solder Tail Contact Material = Copper Alloy

**Contact Related Features:**

- ? [Contact Centerline Spacing \(mm \[in\]\)](#) = 3.96 [0.156]
- ? [Contact Shape](#) = Square
- ? [Contact Mating Area Plating Material](#) = Tin
- ? [Contact Material](#) = Copper Alloy

**Housing Related Features:**

- ? Housing Color = Natural
- ? Housing Flammability Rating = UL 94V -0
- ? Housing Material = Polyester

**Configuration Related Features:**

- ? [Backwall/Post Interruption\(s\)](#) = Without

**Industry Standards:**

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- ? [Terminate To](#) = Printed Circuit Board

**Operation/Application:**

- ? [Application](#) = Wire -to -Board

**Other:**

- ? Brand = AMP