




### Space-saving SOP4-pin high capacity type with built-in input register

**PhotoMOS®**  
**GU SOP 1 Form A High Capacity**  
**Voltage-sensitive (AQY212FG2S)**



**RoHS compliant**

## FEATURES

### 1. Built-in input resistor means less man-hours when mounting

The voltage-sensitive type, which eliminates the need to mount an external input resistor, is now available in a small package (recommended input voltage is 5 V). Man-hours spent mounting external input resistors are cut and board designing is simplified.

### 2. Saves space on PC board

Since the small package size remains the same while including a built-in input resistor, space on the PC board is saved. This makes it easier to incorporate space savings when designing miniature devices.

### 3. Continuous load current of 1.25A


This miniature SOP type controls 1.25A/60V load.

## TYPICAL APPLICATIONS

### 1. Measuring and testing equipment

Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment.

### 2. Telecommunication, Broadcasting, and Medical equipment

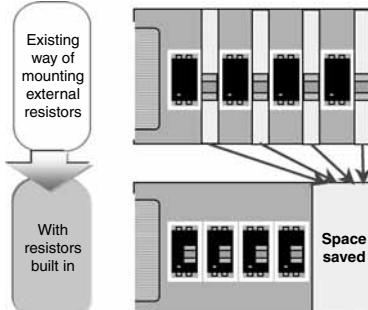

<Artistic impression of PC board space savings due to built-in resistor>

\*Above is in case of SSOP.

## TYPES

Output rating* <sup>1</sup>			Package	Part No.* <sup>2</sup>			Packing quantity	
	Load voltage	Load current		Tape and reel packing style		Tube	Tape and reel	
				Tube packing style	Picked from the 1/2-pin side			
AC/DC dual use	60V	1.25A	SOP4-pin	AQY212FG2S	AQY212FG2SX	AQY212FG2SZ	1 tube contains: 100 pcs. 1 batch contains: 2,000 pcs.	1,000 pcs.

Notes: \*1 Indicate the peak AC and DC values.

\*2 For space reasons, only "212FG2" is marked on the product. The three initial letters of the part number "AQY", the package (SOP) indicator "S", and the packing style indicator "X" or "Z" have been omitted.

# GU SOP 1 Form A High Capacity Voltage-sensitive (AQY212FG2S)

## RATING


### 1. Absolute maximum ratings (Condition: ambient temperature 25°C 77°F)

Item		Symbol	AQY212FG2S	Remarks
Input	Input voltage	V <sub>IN</sub>	6V	
	Input reverse voltage	V <sub>RIN</sub>	5V	
	Power dissipation	P <sub>in</sub>	65mW	
Output	Load voltage (peak AC)	V <sub>L</sub>	60V	
	Load current	I <sub>L</sub>	1.25A	Peak AC, DC
	Peak load current	I <sub>peak</sub>	3A	100ms (1shot), V <sub>L</sub> =DC
	Power dissipation	P <sub>out</sub>	400mW	
Total power dissipation		P <sub>T</sub>	450mW	
I/O isolation voltage		V <sub>iso</sub>	500Vrms	
Ambient temperature	Operating	T <sub>opr</sub>	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T <sub>stg</sub>	-40 to +100°C -40 to +212°F	

### 2. Electrical characteristics (Condition: ambient temperature 25°C 77°F)

Item		Symbol	AQY212FG2S	Condition
Input	Operate voltage	Typ. Max.	V <sub>Fon</sub>	I <sub>L</sub> = 100mA
	Turn off voltage	Min.	0.8V	
		Typ.	1.4V	
Input current		Typ.	I <sub>IN</sub>	V <sub>IN</sub> = 5V
Output	On resistance	Typ.	R <sub>on</sub>	V <sub>IN</sub> = 5V, I <sub>L</sub> = Max. Within 1 s
		Max.		
	Off state leakage current	Typ.	I <sub>Leak</sub>	V <sub>IN</sub> = 0V, V <sub>L</sub> = Max.
		Max.	1μA	
Transfer characteristics	Turn on time*	Typ.	T <sub>on</sub>	V <sub>IN</sub> = 5V, I <sub>L</sub> = 100mA, V <sub>L</sub> = 10V
		Max.		
	Turn off time*	Typ.	T <sub>off</sub>	f = 1MHz, V <sub>B</sub> = 0V
		Max.		
	I/O capacitance	Typ.	C <sub>iso</sub>	f = 1MHz, V <sub>B</sub> = 0V
		Max.	1.5pF	
	Initial I/O isolation resistance	Min.	R <sub>iso</sub>	500V DC
Max. operating frequency		Max.	—	V <sub>IN</sub> = 5V, duty = 50% V <sub>I</sub> × I <sub>I</sub> = 75V·A

\*Turn on/Turn off time

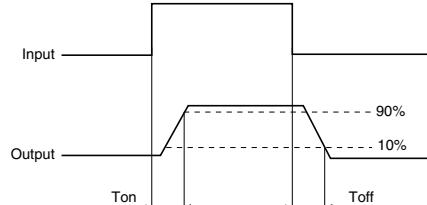

### 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Min.	Max.	Unit
Input voltage	V <sub>IN</sub>	4.5	5.5	V
AQY212FG2S	Load voltage (Peak AC)	V <sub>L</sub>	—	V
	Continuous load current	I <sub>L</sub>	—	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

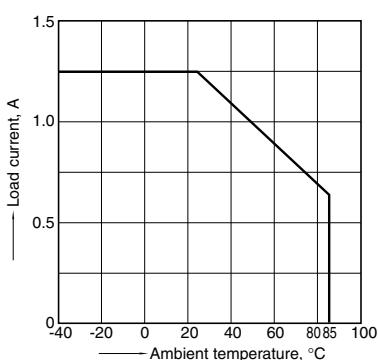


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4  
Input voltage: 5V; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

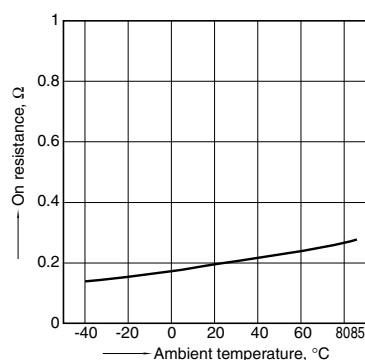

### 3. Turn on time vs. ambient temperature characteristics


Input voltage: 5V; Load voltage: 10V (DC);  
Continuous load current: 100mA (DC)

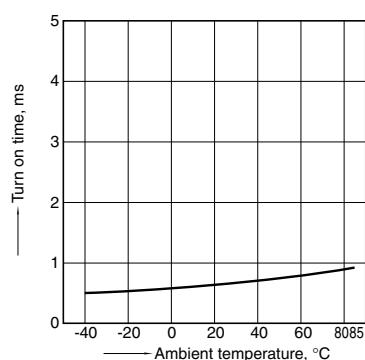

# GU SOP 1 Form A High Capacity Voltage-sensitive (AQY212FG2S)


## 4. Turn off time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC); Continuous load current: 100mA (DC)

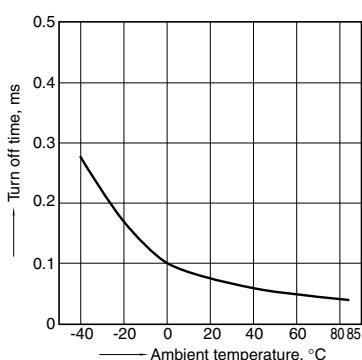


## 5. Turn on voltage vs. ambient temperature characteristics

Load voltage: 10V (DC); Continuous load current: 100mA (DC)

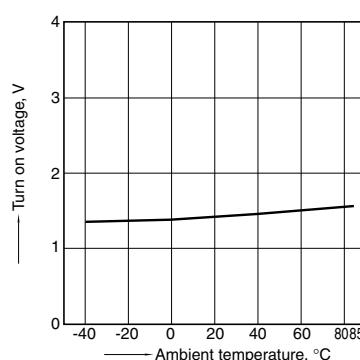


## 6. Turn off voltage vs. ambient temperature characteristics

Load voltage: 10V (DC); Continuous load current: 100mA (DC)

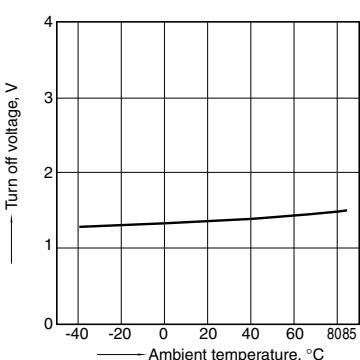


## 7. Input current vs. ambient temperature characteristics

Input voltage: 5V

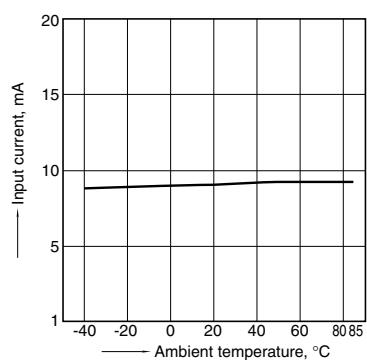


## 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F




## 9. Input current vs. input voltage characteristics

Ambient temperature: 25°C 77°F  
(Recommended input voltage: 5±0.5V)

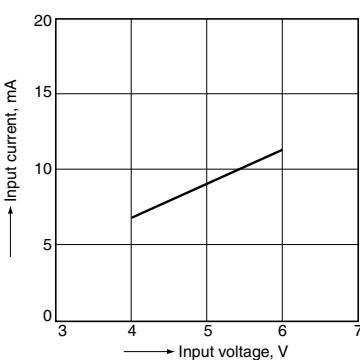


## 10. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

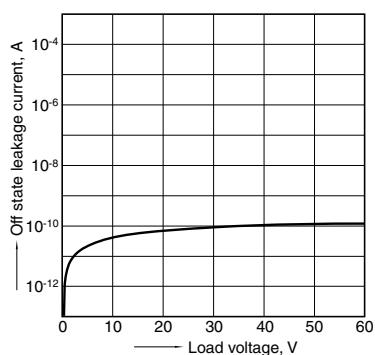


## 11. Turn on time vs. input voltage characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

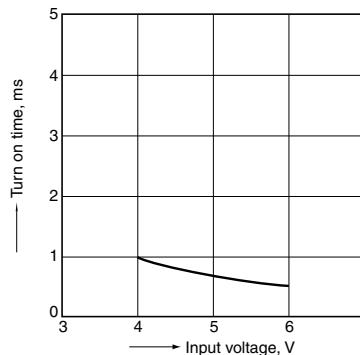


## 12. Turn off time vs. input voltage characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

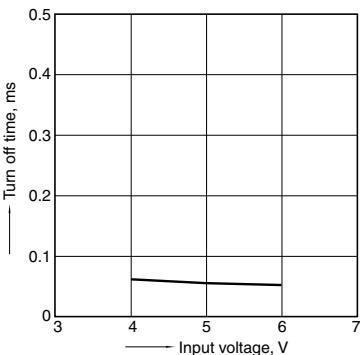


## 13. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4  
Frequency: 1 MHz, 30mVrms;  
Ambient temperature: 25°C 77°F

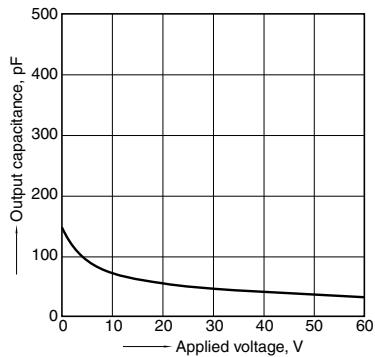

## 14. Max. operating frequency vs. load voltage-load current characteristics

Input voltage: 5V  
Ambient temperature: 25°C 77°F

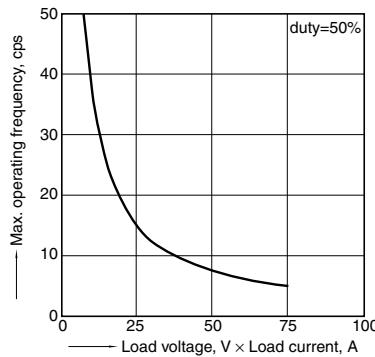

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017