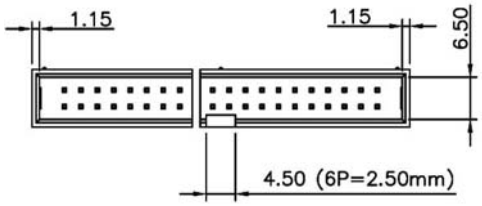



AWHW14G-0x02-T-R

Plating
5 - tin plated
2 - quality class III,
flash gold selective



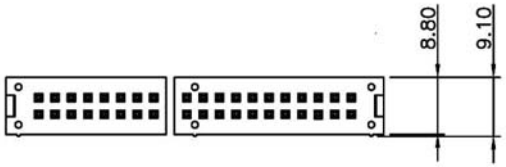

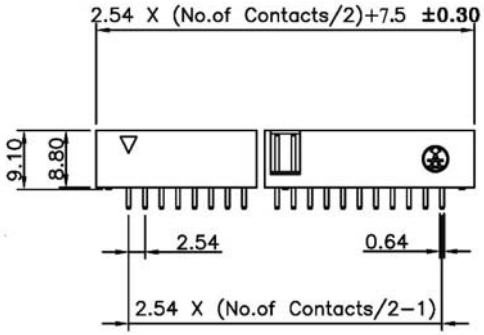

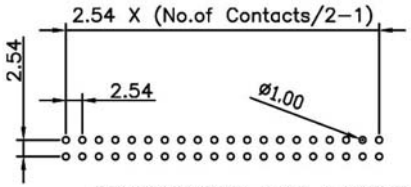

RENOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

Current Rating:	3 Amps
Insulator Resistance:	5000 Megohms min
Dielectric Withstanding:	AC 1000 V
Operating Temperature:	- 40˚ ~ +105˚ C
Contact Material:	Copper Alloy
Insulator Material:	Polyester,UL 94V-0 Standard: PBT

Underplate: Nickel
Contact Area: 1u"~30u" Selective Gold
Solder Tails Area: 100u" Tin/Lead(Brighten Tin)or
100u" Tin/Lead Free(Brighten Tin/Matte Tin)

Tolerance: ±0.2 Unit: MM

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
AWHW14G-0x02-T-R

Title: Dual Row Header, 2.54MM pitch, PCB Mount

Drawing No.

rev00

Replace

Sheet