

AZ983

80 AMP MINI-ISO AUTOMOTIVE RELAY

FEATURES

- PCB terminals
- 80 Amp contact rating
- High momentary carry current
- High operating temperature (85°C)
- SPST N.O. (1 Form A), SPDT (1 Form C), SPST N.C. (1 Form B)
- ISO/TS 16949, ISO14001
- Epoxy sealed version available



CONTACTS

Arrangement	SPST (N.O.) (1 Form A) SPDT (1 Form C), SPST (N.C.) (1 Form B)
Ratings	Resistive load: Max. switched power: 1120 W (SPST) Form A 840 W (N.O.) Form C 840 W (N.C.) Form C, Form B Max. switched current: 80 A (SPST) Form A 60 A (N.O.) Form C 60 A (N.C.) Form C, Form B Max. switched voltage: 75 VDC
Material	Silver tin oxide
Resistance	< 50 milliohms initially (24 V, 1 A voltage drop method)

COIL

Power	
At Pickup Voltage (typical)	0.76 W
Max. Continuous Dissipation	3.0 W at 20°C (68°F)
Temperature Rise	68°C (122°F) at nominal coil voltage
Temperature	Max. 155°C (311°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at 80 A 14 VDC Res.
Operate Time (typical)	7 ms at nominal coil voltage
Release Time (typical)	5 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	500 Vrms coil to contact 500 Vrms contact to contact
Insulation Resistance	100 megohms min. at 500 VDC, 20°C 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating Storage	-40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 105°C (221°F)
Vibration	0.062" DA at 10-55 Hz
Shock	10 g
Enclosure	PA (UL94: V-0)
Terminals	Copper alloy PCB
Max Solder Temp.	270°C (518°F)
Max Solder Time	5 seconds
Max Solvent Temp.	80°C (176°F)
Max Immersion Time	30 seconds
Weight	40 grams



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM


AZ983

RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	SPST (N.O.)	SPDT
6	3.9	7.8	20	AZ983-1A-6D	AZ983-1C-6D
12	7.8	15.6	80	AZ983-1A-12D	AZ983-1C-12D
24	15.6	31.2	320	AZ983-1A-24D	AZ983-1C-24D

*For SPST (N.C.) (1 Form B) relay, substitute "-1B" for "-1A". Add suffix "R" for resistor in parallel with coil. Resistor values: 6V: 180 ohms, 12V: 680 ohms, 24V: 2700 ohms. Add suffix "D" for diode across coil option ("+" pole of power supply at terminal #86). Add Suffix "E" for epoxy sealed version.

MECHANICAL DATA

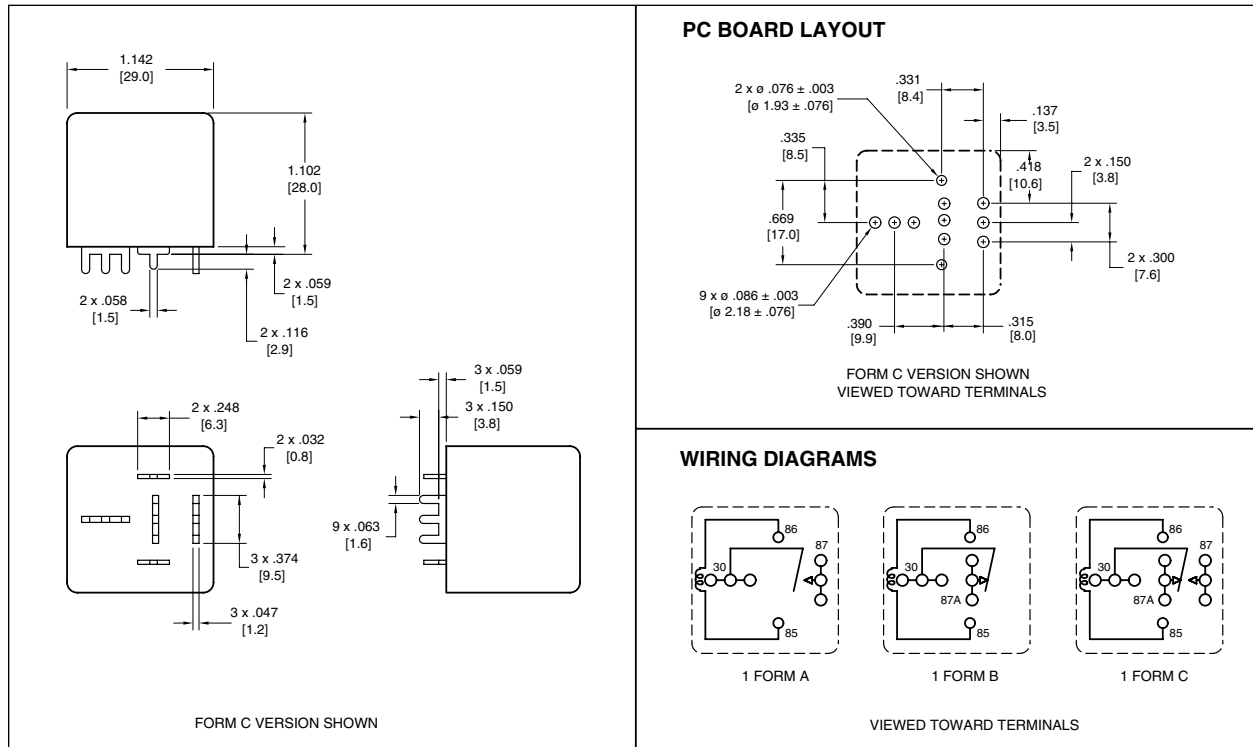

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM