



### Features

- 2" x 3" x 1.0" Package
- Operates to 80°C Ambient
- For 1U Applications
- 60W convection cooled
- Universal Input 90-264Vac
- Optional Power ON LED
- Approved to CSA/EN/IEC/UL60950-1, 2<sup>nd</sup> Edition
- Efficiency 85% typical at Full Load
- 2 Year Warranty
- RoHS Compliant



### Description

The GB60S Series models provide a highly reliable power source in a small 2" x 3" x 1.0" package. Fully compliant to the applicable safety and EMC standards, these models will allow easy integration into many industrial and ITE applications. All 4 models are CE marked to low voltage directive and approved to ITE standards of EN60950, 2<sup>nd</sup> edition.

### Model Selection

Model Number	Volts	Output Current Convection Cooled	Output Power Convection Cooled	Ripple & Noise**	Total Regulation	OVP Threshold
GB60S12K	12V	4.58A	55W	120mV pk-pk	±2%	14.4-18Vdc
GB60S15K	15V	4.00A	60W	150mV pk-pk	±2%	18-22.5Vdc
GB60S24K	24V	2.50A	60W	240mV pk-pk	±2%	28.8-36Vdc
GB60S48K	48V	1.25A	60W	480mV pk-pk	±2%	57.6-72Vdc

Notes: \* Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors.

### General Specifications

<b>AC Input</b>	100-240Vac, 47-63Hz, 1Ø rated 80-270Vac, 47-440Hz operational	<b>Turn On Time</b>	2 sec. max. @120Vac
<b>Input Current</b>	120Vac: 1.4A, 240Vac: 0.75A	<b>Hold-up Time</b>	16mS min. @ 60W load, 120Vac input
<b>Inrush Current</b>	240Vac, cold start: will not exceed 40A	<b>Signals</b>	Optional Power ON LED
<b>Input Fuses</b>	F1, F2: 4A, 250VAC fuses provided on all models	<b>Overload Protection</b>	Hiccup Mode, 120% to 180%, typical

**General Specifications** (continued)

<b>Earth Leakage Current</b>	<1mA@240Vac, NC	<b>Short Circuit Protection</b>	Hiccup Mode
<b>Power Factor</b>	Not Applicable	<b>Overtemperature Protection</b>	Self-recovering
<b>Efficiency</b>	85% typical (83% for 12V models)	<b>Safety Standards</b>	CSA/EN/IEC/UL60950-1, 2 <sup>nd</sup> Edition.
<b>Output Power</b>	60W continuous (55W for 12V models)	<b>Isolation</b>	Input-Output: 4000Vac Input-Ground: 1800Vac Output-Ground: 1500Vac
<b>Peak Output Power</b>	Not Applicable	<b>Operating Temperature</b>	-40°C to +80°C
<b>Ripple and Noise</b>	See chart above	<b>Output Power Derating</b>	See derating curves for output power ratings above 50°C
<b>Output Voltage</b>	See chart	<b>Storage Temperature</b>	-40°C to +85°C
<b>Voltage Adjustability</b>	+/-5% from nominal	<b>Relative Humidity</b>	5% to 95%, non-condensing
<b>Minimum Load</b>	Not required	<b>Altitude</b>	Operating: 3000 meters Non-operating: 40,000 ft.
<b>Total Regulation</b>	+/- 3%. See chart	<b>MTBF</b>	>600,000 hours per Telcordia
<b>Transient Response</b>	500µS max. to 1%, 50% load step. 0.2A/µS, 3.5% deviation typical	<b>Vibration</b>	Random Vibration per MIL-STD-810E, Method 514.4, Cat. 1, Figure 514.4.1, 1 hour in each of 3 axes.
<b>Switching Frequency</b>	65kHz, typical	<b>Shock</b>	Half-sine, 40 gpk, 10 mS duration, +/- in each of 3 axes, 6 shocks total
<b>Dimensions</b>	2.0" x 3.0" x 1.0" 50.8 x 76.2 x 25.4mm	<b>Weight</b>	126g

**Notes:**

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ±.02".
3. Mounting holes should be grounded for EMI purpose
4. FG is safety ground connection. (Class I models)
5. Specifications are for convection rating at factory settings with 115Vac input and 25°C ambient unless otherwise stated.
6. This power supply requires mounting on metal standoffs 0.20" (5mm) in height.
7. For Class II (no earth ground) applications, all mounting hardware must be non-conductive.



### Connector Information

Input Connector J100	DC Output Connector J2	Ground
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	PIN 1) +Vout PIN 3) -Vout PIN 2) +Vout PIN 4) -Vout	19-30258-0187 (Keystone 1285) (Zierick 895)(.187*0.020)
Mating Connector: Tyco/AMP 640250-3 Pins = 770461-1	Mating Connector: AMP 640250-4 Pins = 770461-1	

### Output vs. Temperature

- 40°C start up: At -20°C, the supply meet its full spec except ripple & noise might be increased from 1% to 2% of the output voltage.
- See chart below for output power available at higher ambients:

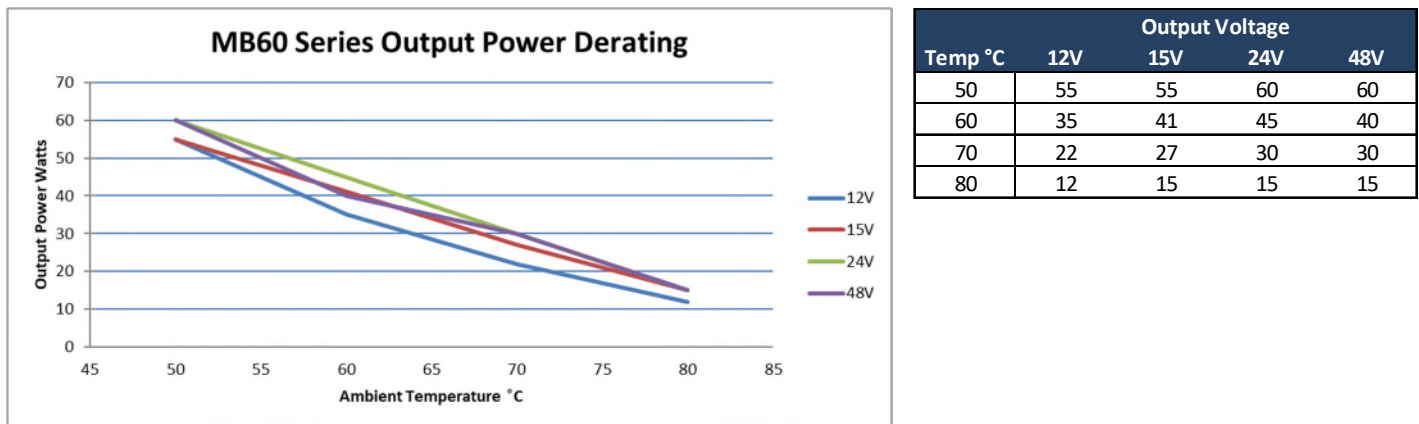


Fig.1

### Efficiency vs. Loading


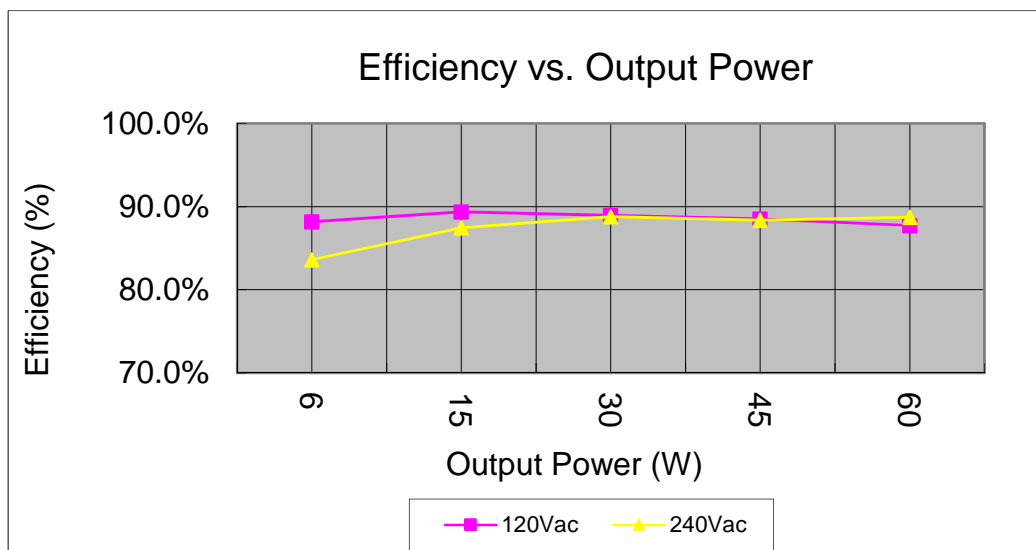



Fig.2

### Ripple & Noise


To verify that the output ripple and noise does not exceed the level specified in the product specification, measured using a scope probe socket with 0.1uF ceramic and a 10uF electrolytic capacitor connected in parallel across it, 20MHz BW.

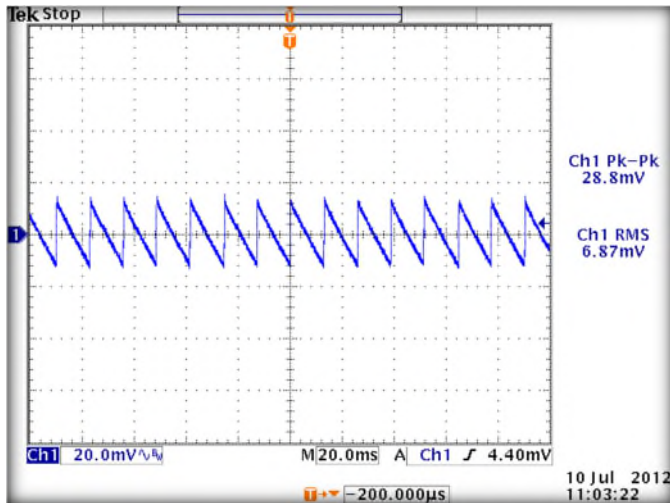


[24V OUT, No Load, 90VAC, 60Hz](#)

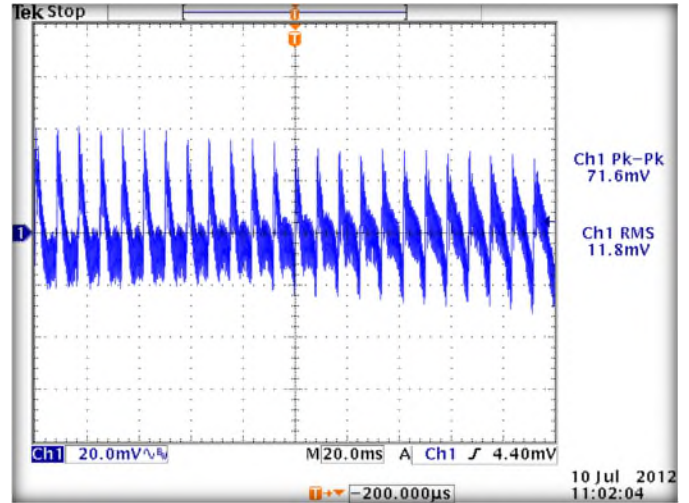

[24V OUT, Full Load, 90VAC, 60Hz](#)

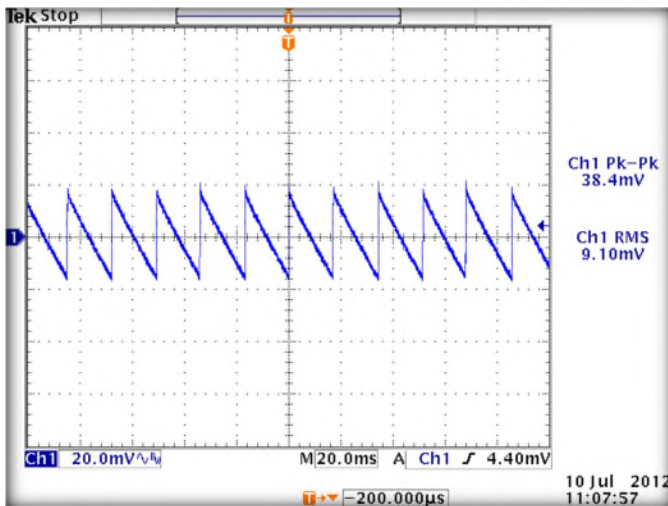


[24V OUT, No Load, 264VAC, 50Hz](#)

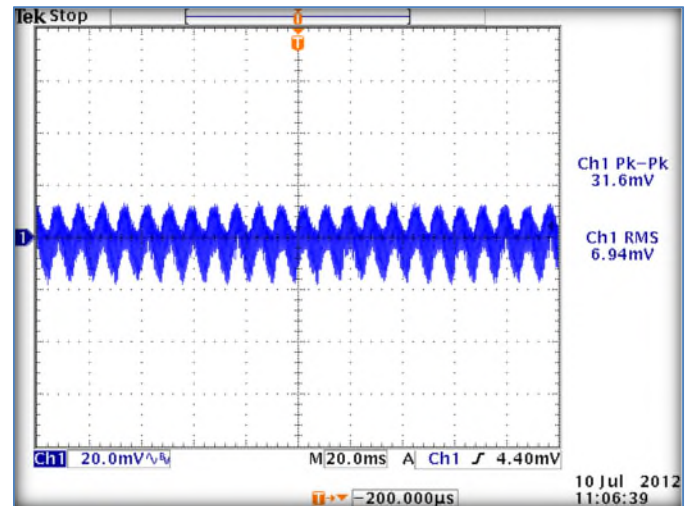


[24V OUT, Full Load, 264VAC, 50Hz](#)



**Output Transient Response:** 50% load step within the regulation limits of mini. and max. load,  $di/dt < 0.2A/\mu\text{Sec}$ . Recovery time not specified as there is no lapse in regulation with a 50% Load Step. Maximum voltage deviation is 3.5%.

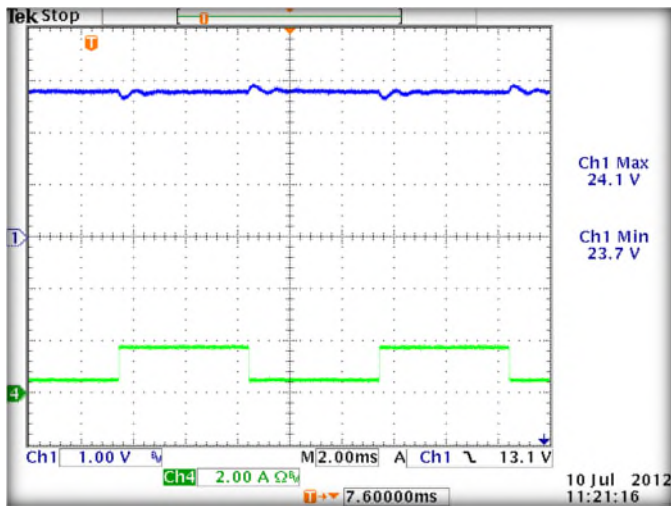


[24V OUT, 120VAC, 25% TO 75% LOAD STEP](#)

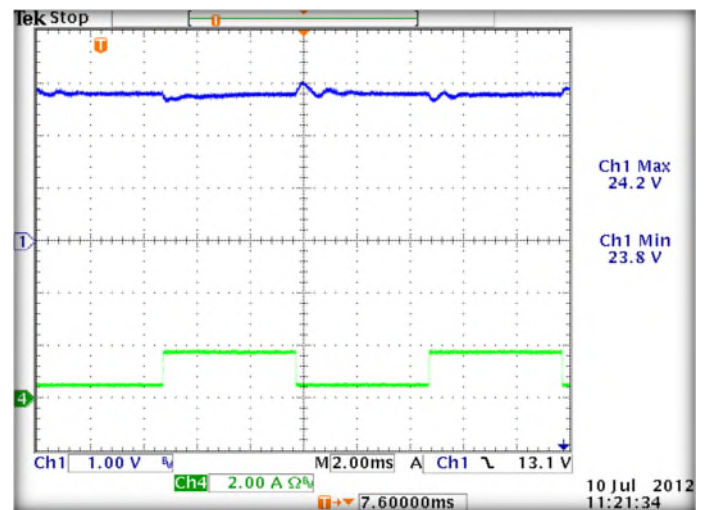


[24V OUT, 240VAC, 25% TO 75% LOAD STEP](#)

### Output Overload Characteristic

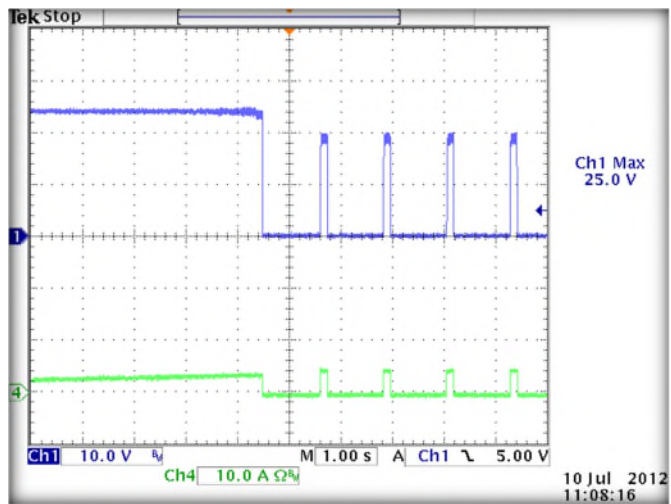


[24V OUT, 90VAC](#)

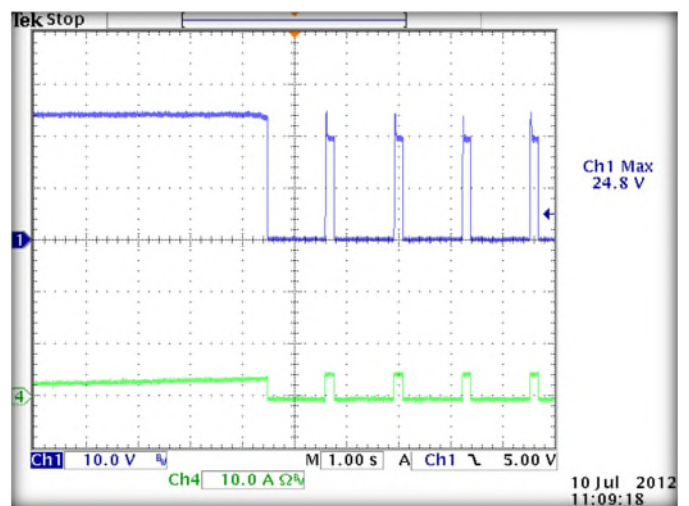


[24V OUT, 264VAC](#)

**Short Circuit Protection:** Supply shall protect itself against Short Circuit conditions. No damage will occur if the output is shorted.

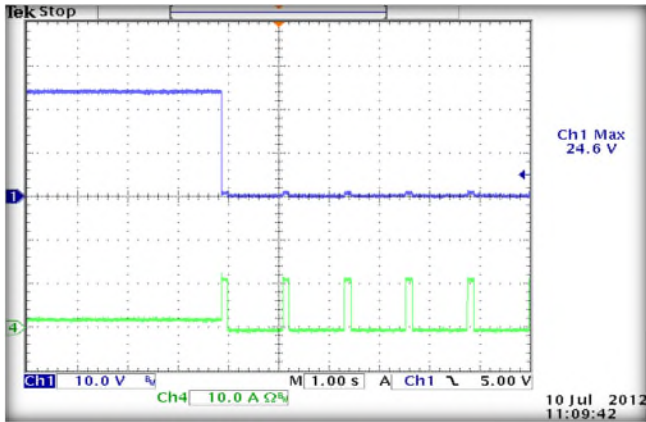


[24V OUT, 90VAC](#)

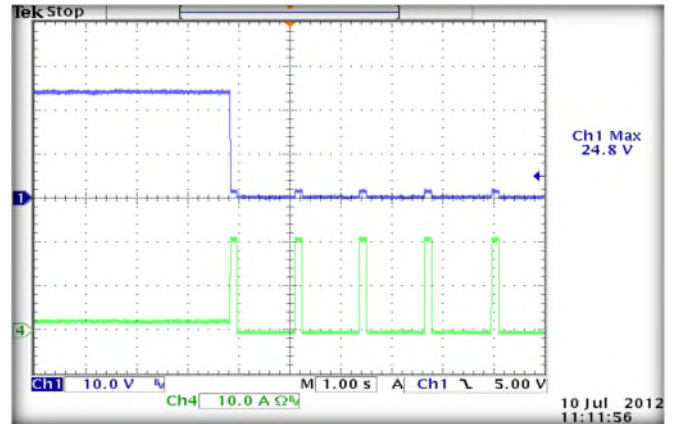


[24V OUT, 264VAC](#)

**Overvoltage Protection**

OVP firing reduces output voltage to <50% of nominal in <50ms. See models chart for trip ranges.

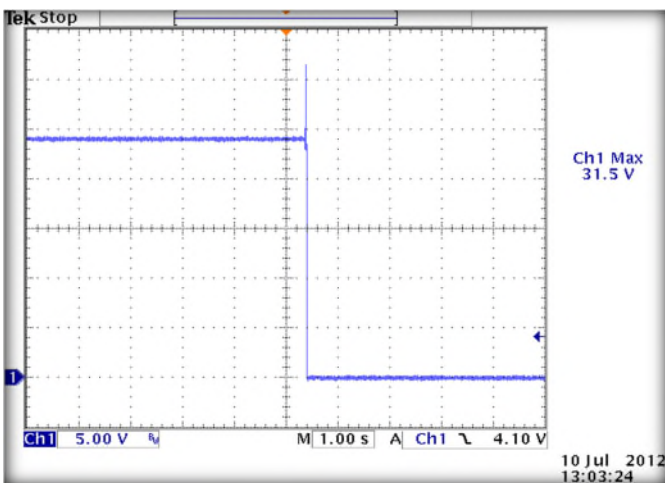


[24V OUT, FULL LOAD, 90VAC, 60Hz](#)

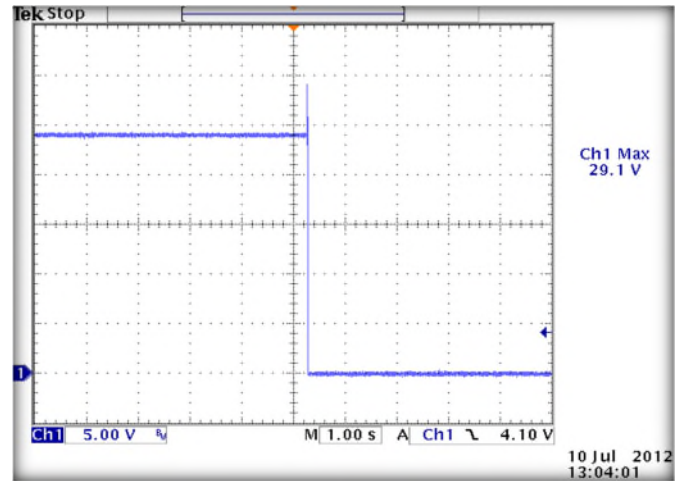


[24V OUT, FULL LOAD, 264VAC, 50Hz](#)

**Turn On Time**

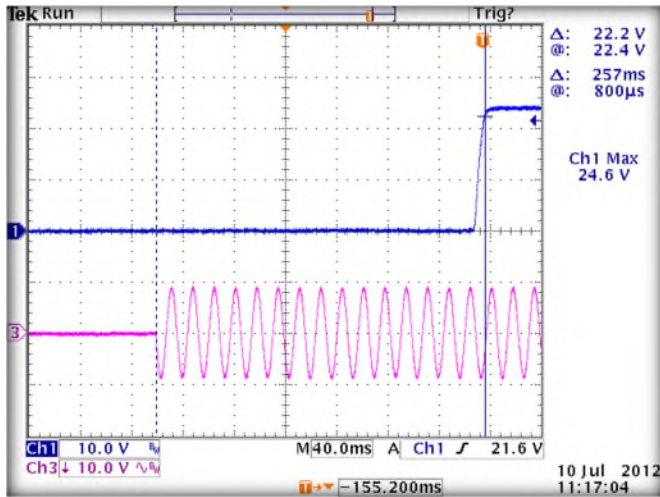


[24V OUT, FULL LOAD, 90VAC, 60HZ](#)

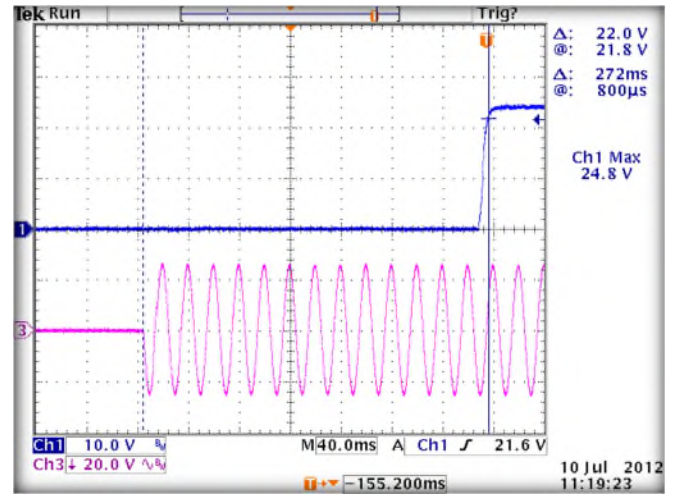

[24V OUT, FULL LOAD, 264VAC, 50HZ](#)

**Hold Up Time**

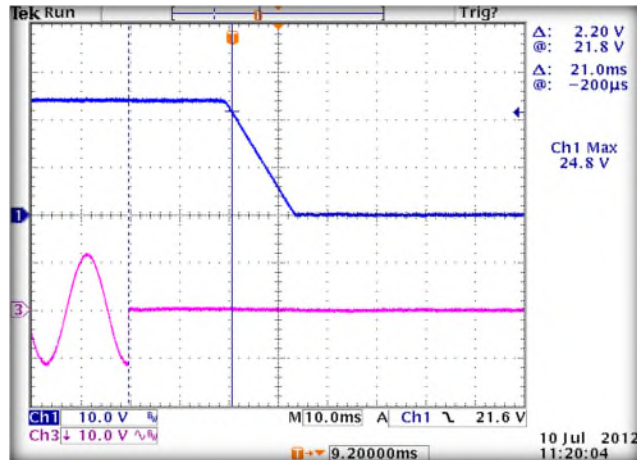

[24V OUT, FULL LOAD, 120VAC, 60HZ](#)