

TRANSZORB® Transient Voltage Suppressors



Case Style P600

PRIMARY CHARACTERISTICS	
V_{WM}	5.0 V to 188 V
P_{PPM}	5000 W
P_D	8.0 W
I_{FSM}	500 A
T_J max.	175 °C

FEATURES

- P600, glass passivated chip junction
- Available in uni-directional polarity only
- 5000 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC


RoHS
COMPLIANT

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: Molded epoxy body over passivated junction
Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

Base P/NHE3 - RoHS compliant, high reliability/automotive grade (AEC Q101 qualified)

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

Polarity: Color band denotes cathode end

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power dissipation with a 10/1000 μ s waveform ⁽¹⁾	P_{PPM}	5000	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾	I_{PPM}	See next table	A
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5)	P_D	8.0	W
Peak forward surge current 8.3 ms single half sine-wave (Fig. 5)	I_{FSM}	600	A
Instantaneous forward voltage at 100 A ⁽²⁾	V_F	3.5	V
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 175	°C

Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2

(2) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE V_{BR} (V) ⁽¹⁾		TEST CURRENT AT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA)	MAXIMUM PEAK PULSE CURRENT I_{PPM} ⁽²⁾ (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V_{BR} (%/ $^\circ\text{C}$)
	MIN.	MAX.						
5KP5.0	6.40	7.30	50	5.0	2000	521	9.6	0.057
5KP5.0A	6.40	7.00	50	5.0	2000	543	9.2	0.057
5KP6.0	6.67	8.15	50	6.0	5000	439	11.4	0.061
5KP6.0A	6.67	7.37	50	6.0	5000	485	10.3	0.061
5KP6.5	7.22	8.82	50	6.5	2000	407	12.3	0.065
5KP6.5A	7.22	7.98	50	6.5	2000	446	11.2	0.065
5KP7.0	7.78	9.51	50	7.0	1000	376	13.3	0.068
5KP7.0A	7.78	8.60	50	7.0	1000	417	12.0	0.068
5KP7.5	8.33	10.2	5.0	7.5	250	350	14.3	0.073
5KP7.5A	8.33	9.21	5.0	7.5	250	388	12.9	0.073
5KP8.0	8.89	10.9	5.0	8.0	150	333	15.0	0.075
5KP8.0A	8.89	9.83	5.0	8.0	150	368	13.6	0.075
5KP8.5	9.44	11.5	5.0	8.5	50	314	15.9	0.078
5KP8.5A	9.44	10.4	5.0	8.5	50	347	14.4	0.078
5KP9.0	10.0	12.2	5.0	9.0	20	296	16.9	0.081
5KP9.0A	10.0	11.1	5.0	9.0	20	325	15.4	0.081
5KP10	11.1	13.6	5.0	10.0	15	266	18.8	0.084
5KP10A	11.1	12.3	5.0	10.0	15	294	17.0	0.084
5KP11	12.2	14.9	5.0	11.0	10	249	20.1	0.086
5KP11A	12.2	13.5	5.0	11.0	10	275	18.2	0.086
5KP12	13.3	16.3	5.0	12.0	5.0	227	22.0	0.088
5KP12A	13.3	14.7	5.0	12.0	5.0	251	19.9	0.088
5KP13	14.4	17.6	5.0	13.0	2.0	210	23.8	0.090
5KP13A	14.4	15.9	5.0	13.0	2.0	233	21.5	0.090
5KP14	15.6	19.1	5.0	14.0	2.0	194	25.8	0.092
5KP14A	15.6	17.2	5.0	14.0	2.0	216	23.2	0.092
5KP15	16.7	20.4	5.0	15.0	2.0	186	26.9	0.094
5KP15A	16.7	18.5	5.0	15.0	2.0	205	24.4	0.094
5KP16	17.8	21.8	5.0	16.0	2.0	174	28.8	0.096
5KP16A	17.8	19.7	5.0	16.0	2.0	192	26.0	0.096
5KP17	18.9	23.1	5.0	17.0	2.0	164	30.5	0.097
5KP17A	18.9	20.9	5.0	17.0	2.0	181	27.6	0.097
5KP18	20.0	24.4	5.0	18.0	2.0	155	32.2	0.098
5KP18A	20.0	22.1	5.0	18.0	2.0	171	29.2	0.098
5KP20	22.2	27.1	5.0	20.0	2.0	140	35.8	0.099
5KP20A	22.2	24.5	5.0	20.0	2.0	154	32.4	0.099
5KP22	24.4	29.8	5.0	22.0	2.0	127	39.4	0.100
5KP22A	24.4	26.9	5.0	22.0	2.0	141	35.5	0.100
5KP24	26.7	32.6	5.0	24.0	2.0	116	43.0	0.101
5KP24A	26.7	29.5	5.0	24.0	2.0	129	38.9	0.101
5KP26	28.9	35.3	5.0	26.0	2.0	107	46.6	0.101
5KP26A	28.9	31.9	5.0	26.0	2.0	119	42.1	0.101
5KP26A	28.9	31.9	5.0	26.0	2.0	119	42.1	0.101
5KP28	31.1	38.0	5.0	28.0	2.0	100	50.1	0.102
5KP28A	31.1	34.4	5.0	28.0	2.0	110	45.4	0.102
5KP30	33.3	40.7	5.0	30.0	2.0	93.5	53.5	0.103
5KP30A	33.3	36.8	5.0	30.0	2.0	103	48.4	0.103
5KP33	36.7	44.9	5.0	33.0	2.0	84.7	59.0	0.104
5KP33A	36.7	40.6	5.0	33.0	2.0	93.8	53.3	0.104
5KP36	40.0	48.9	5.0	36.0	2.0	77.8	64.3	0.104
5KP36A	40.0	44.2	5.0	36.0	2.0	86.1	58.1	0.104



ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE V_{BR} (V) ⁽¹⁾		TEST CURRENT AT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA)	MAXIMUM PEAK PULSE CURRENT I_{PPM} ⁽²⁾ (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V_{BR} ($\%/\text{ }^\circ\text{C}$)
	MIN.	MAX.						
5KP40	44.4	54.3	5.0	40.0	2.0	70.0	71.4	0.105
5KP40A	44.4	49.1	5.0	40.0	2.0	77.5	64.5	0.105
5KP43	47.8	58.4	5.0	43.0	2.0	65.2	76.7	0.105
5KP43A	47.8	52.8	5.0	43.0	2.0	72.0	69.4	0.105
5KP45	50.0	61.1	5.0	45.0	2.0	62.3	80.3	0.106
5KP45A	50.0	55.3	5.0	45.0	2.0	68.8	72.7	0.106
5KP48	53.3	65.2	5.0	48.0	2.0	58.5	85.5	0.106
5KP48A	53.3	58.9	5.0	48.0	2.0	64.6	77.4	0.106
5KP51	56.1	69.3	5.0	51.0	2.0	54.9	91.1	0.107
5KP51A	56.7	62.7	5.0	51.0	2.0	60.7	82.4	0.107
5KP54	60.0	73.3	5.0	54.0	2.0	51.9	96.3	0.107
5KP54A	60.0	66.3	5.0	54.0	2.0	57.4	87.1	0.107
5KP58	64.4	78.7	5.0	58.0	2.0	48.5	103	0.107
5KP58A	64.4	71.2	5.0	58.0	2.0	53.4	94	0.107
5KP60	66.7	81.5	5.0	60.0	2.0	46.7	107	0.108
5KP60A	66.7	73.7	5.0	60.0	2.0	51.7	97	0.108
5KP64	71.1	96.9	5.0	64.0	2.0	43.9	114	0.108
5KP64A	71.1	78.6	5.0	64.0	2.0	48.5	103	0.108
5KP70	77.6	95.1	5.0	70.0	2.0	40.0	125	0.108
5KP70A	77.8	86.0	5.0	70.0	2.0	44.2	113	0.108
5KP75	83.3	102	5.0	75.0	2.0	37.3	134	0.108
5KP75A	83.3	92.1	5.0	75.0	2.0	41.3	121	0.108
5KP78	86.7	106.0	5.0	78.0	2.0	36.0	139	0.108
5KP78A	86.7	95.8	5.0	78.0	2.0	39.7	126	0.108
5KP85	94.4	115	5.0	85.0	2.0	33.1	151	0.108
5KP85A	94.4	104	5.0	85.0	2.0	36.5	137	0.110
5KP90	100	122	5.0	90.0	2.0	31.3	160	0.110
5KP90A	100	111	5.0	90.0	2.0	34.2	146	0.110
5KP100	111	136	5.0	100	2.0	27.9	179	0.110
5KP100A	111	123	5.0	100	2.0	30.9	162	0.110
5KP110	122	149	5.0	110	2.0	25.5	196	0.112
5KP110A	122	135	5.0	110	2.0	28.2	177	0.112
5KP120	133	163	5.0	120	2.0	23.4	214	0.112
5KP120A	133	147	5.0	120	2.0	25.9	193	0.112
5KP130	144	176	5.0	130	2.0	21.6	230	0.112
5KP130A	144	159	5.0	130	2.0	23.9	209	0.112
5KP150	167	204	5.0	150	2.0	18.7	268	0.112
5KP150A	167	185	5.0	150	2.0	20.6	243	0.112
5KP160	178	218	5.0	160	2.0	17.4	287	0.112
5KP160A	178	197	5.0	160	2.0	19.3	259	0.112
5KP170	189	231	5.0	170	2.0	16.4	304	0.112
5KP170A	189	209	5.0	170	2.0	18.2	275	0.112
5KP188	209	255	5.0	188	2.0	14.5	344	0.112
5KP188A	209	231	5.0	188	2.0	15.2	328	0.112

Notes:

- (1) Pulse test: $t_p \leq 50\text{ ms}$
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2
- (3) All items and symbols are consistent with ANSI/IEEE C62.35



ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
5KP5.0A-E3/54	2.776	54	800	13" diameter paper tape and reel
5KP5.0AHE3/54 ⁽¹⁾	2.776	54	800	13" diameter paper tape and reel

Note:

(1) Automotive grade AEC Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

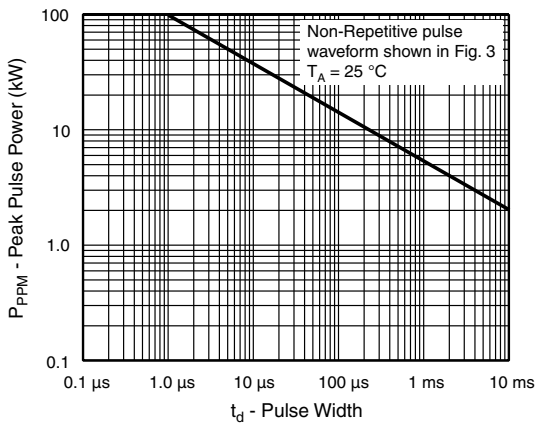


Figure 1. Peak Pulse Power Rating Curve

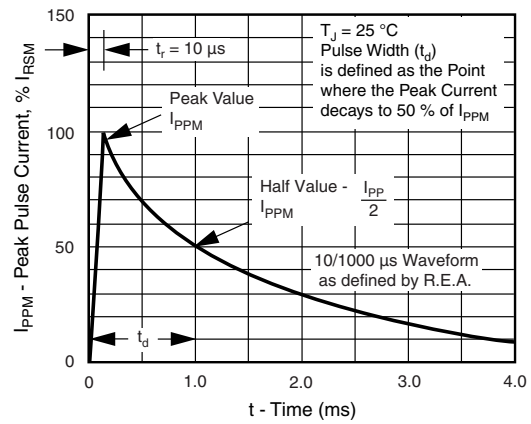


Figure 3. Pulse Waveform

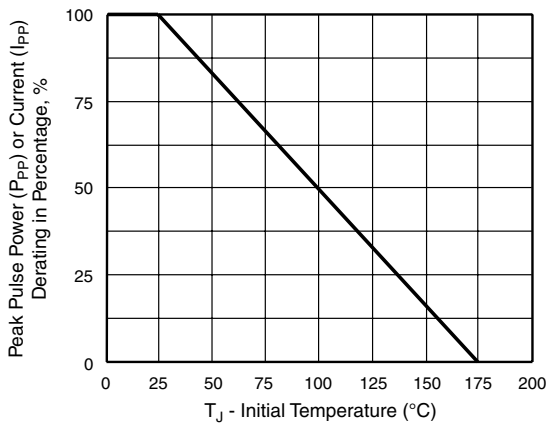


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

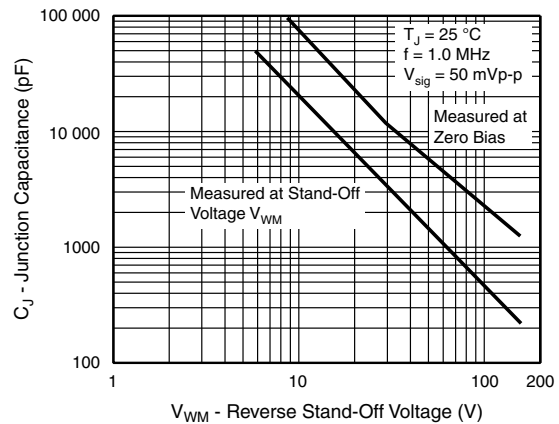


Figure 4. Typical Junction Capacitance

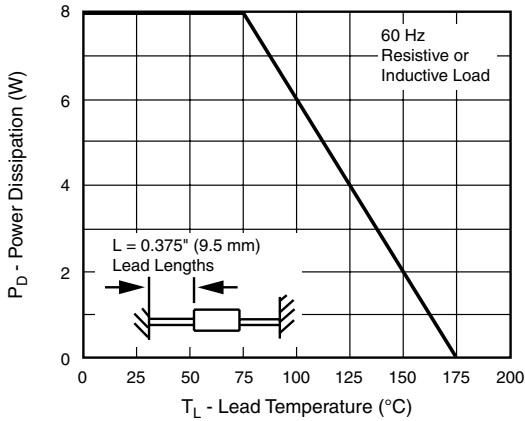


Figure 5. Power Derating Curve


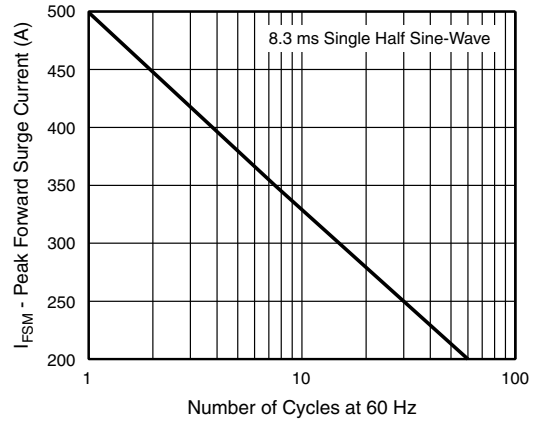


Figure 6. Maximum Non-repetitive Forward Surge Current

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

Case Style P600

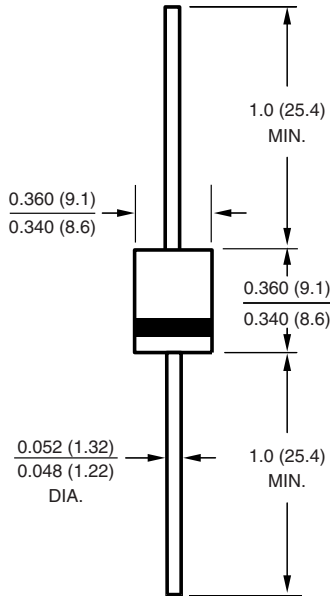

APPLICATION NOTE

The 5KP series of high power transient voltage suppressors were designed to be used on the output of switching power supplies. These devices may be used to replace crowbar circuits. Both the 5 % and 10 % voltage tolerances are referenced to the power supply output voltage level.

They are able to withstand high levels of peak current while allowing a circuit breaker to trip or a fuse blow before shorting. This will enable the user to reset the breaker or replace the fuse and continue operation. For this type operation, it is recommended that a sufficient mounting surface be used for dissipating the heat generated by the Transient Voltage Suppressor during the transient or over-voltage condition.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.