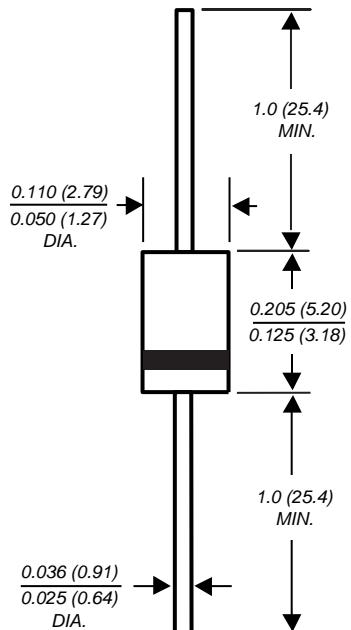



**DO-204AM**

*Dimensions in inches and (millimeters)*
*Extended  
Voltage Range*

## Zener Diodes

**Vz Range 1.0, 3.6 to 200V**
**Power Dissipation 2.0W**

### Features

- Silicon Power Zener Diodes.
- For use in stabilizing and clipping circuits with high power rating.
- The Zener voltages are graded according to the international E 24 standard. Smaller voltage tolerances are available upon request.

### Mechanical Data

**Case:** JEDEC DO-204AM molded plastic body

**Weight:** approx. 0.34g

**Packaging Codes/Options:**

E2/4K per Ammo mag. (52mm tape), 20K/box  
E3/5K per 13" reel (52mm tape), 10K/box

### Maximum Ratings and Thermal Characteristics (TA = 25°C unless otherwise noted)

| Parameter                                    | Symbol           | Value              | Unit |
|--|------------------|--------------------|------|
| Zener Current (see Table "Characteristics")  |                  |                    |      |
| Power Dissipation at T <sub>amb</sub> = 25°C | P <sub>tot</sub> | 2.0 <sup>(1)</sup> | W    |
| Thermal Resistance Junction to Ambient Air   | R <sub>θJA</sub> | 60 <sup>(1)</sup>  | °C/W |
| Junction Temperature                         | T <sub>j</sub>   | 150                | °C   |
| Storage Temperature Range                    | T <sub>s</sub>   | -55 to +150        | °C   |

**Note:**

(1) Valid provided that leads are kept at ambient temperature at a distance of 10mm from case .

**Electrical Characteristics** ( $T_J = 25^\circ\text{C}$  unless otherwise noted)

| Type               | Zener voltage <sup>(2)</sup><br>at $I_{ZT}$<br>$V_Z$ (V) | Dynamic resistance<br>at $I_{ZT}$<br>$f = 1 \text{ kHz}$<br>max $r_{Zj}$ ( $\Omega$ ) | Temp. coeff.<br>of Zener volt.<br>at $I_{ZT}$<br>$\alpha_{VZ} (10^{-4}/\text{K})$ | Test current<br>$I_{ZT}$ (mA) | Reverse voltage<br>at $I_R = 1 \mu\text{A}$<br>$V_R$ (V) | Admissible<br>Zener current <sup>(1)</sup><br>at $T_{\text{amb}} = 25^\circ\text{C}$<br>$I_Z$ (mA) |
|--------------------|--|---|---|-------------------------------|--|--|
| ZY1 <sup>(3)</sup> | 0.71 ... 0.82  | 1   | -26 ... -16   | 100                           | -  | 1000   |
| ZY3.6              | 3.4 ... 3.8  | 7   | -7 ... +2   | 100                           | -  | 440  |
| ZY3.9              | 3.7 ... 4.1  | 7   | -7 ... +2   | 100                           | -  | 410  |
| ZY4.3              | 4.0 ... 4.6  | 7   | -7 ... +3   | 100                           | -  | 360  |
| ZY4.7              | 4.4 ... 5.0  | 7   | -7 ... +4   | 100                           | -  | 330  |
| ZY5.1              | 4.8 ... 5.4  | 5   | -6 ... +5   | 100                           | -  | 300  |
| ZY5.6              | 5.2 ... 6.0  | 2   | -3 ... +5   | 100                           | > 1.5  | 275  |
| ZY6.2              | 5.8 ... 6.6  | 2   | -1 ... +6   | 100                           | > 1.5  | 245  |
| ZY6.8              | 6.4 ... 7.2  | 2   | 0 ... +7  | 100                           | > 2  | 220  |
| ZY7.5              | 7.0 ... 7.9  | 2   | 0 ... +7  | 100                           | > 2  | 200  |
| ZY8.2              | 7.7 ... 8.7  | 2   | +3 ... +8   | 100                           | > 3.5  | 180  |
| ZY9.1              | 8.5 ... 9.6  | 4   | +3 ... +8   | 50                            | > 7.4  | 165  |
| ZY10               | 9.4 ... 10.6   | 4   | +5 ... +9   | 50                            | > 8.2  | 145  |
| ZY11               | 10.4 ... 11.6  | 7   | +5 ... +10  | 50                            | > 9.2  | 135  |
| ZY12               | 11.4 ... 12.7  | 7   | +5 ... +10  | 50                            | > 10   | 120  |
| ZY13               | 12.4 ... 14.1  | 10  | +5 ... +10  | 50                            | > 10.7   | 110  |
| ZY15               | 13.8 ... 15.8  | 10  | +5 ... +10  | 50                            | > 12   | 98   |
| ZY16               | 15.3 ... 17.1  | 15  | +6 ... +11  | 25                            | > 13.3   | 90   |
| ZY18               | 16.8 ... 19.1  | 15  | +6 ... +11  | 25                            | > 14.7   | 80   |
| ZY20               | 18.8 ... 21.2  | 15  | +6 ... +11  | 25                            | > 16.5   | 72   |
| ZY22               | 20.8 ... 23.3  | 15  | +6 ... +11  | 25                            | > 18.3   | 66   |
| ZY24               | 22.8 ... 25.6  | 15  | +6 ... +11  | 25                            | > 20.1   | 60   |
| ZY27               | 25.1 ... 28.9  | 15  | +6 ... +11  | 25                            | > 22.5   | 53   |
| ZY30               | 28 ... 32  | 15  | +6 ... +11  | 25                            | > 25.1   | 48   |
| ZY33               | 31 ... 35  | 15  | +6 ... +11  | 25                            | > 27.8   | 44   |
| ZY36               | 34 ... 38  | 40  | +6 ... +11  | 10                            | > 30.2   | 40   |
| ZY39               | 37 ... 41  | 40  | +6 ... +11  | 10                            | > 32.9   | 37   |
| ZY43               | 40 ... 46  | 45  | +7 ... +12  | 10                            | > 35.6   | 33   |
| ZY47               | 44 ... 50  | 45  | +7 ... +12  | 10                            | > 39.2   | 30   |
| ZY51               | 48 ... 54  | 60  | +7 ... +12  | 10                            | > 42.8   | 27   |
| ZY56               | 52 ... 60  | 60  | +7 ... +12  | 10                            | > 47.3   | 25   |
| ZY62               | 58 ... 66  | 80  | +8 ... +13  | 10                            | > 51.7   | 21   |
| ZY68               | 64 ... 72  | 80  | +8 ... +13  | 10                            | > 57.1   | 20   |
| ZY75               | 70 ... 79  | 100   | +8 ... +13  | 10                            | > 63.2   | 18   |
| ZY82               | 77 ... 88  | 100   | +8 ... +13  | 10                            | > 68.6   | 16   |
| ZY91               | 85 ... 96  | 200   | +9 ... +13  | 5                             | > 75.7   | 15   |
| ZY100              | 94 ... 106   | 200   | +9 ... +13  | 5                             | > 83.7   | 13   |
| ZY110              | 104 ... 116  | 250   | +9 ... +13  | 5                             | > 92.6   | 12   |
| ZY120              | 114 ... 127  | 250   | +9 ... +13  | 5                             | > 101.6  | 11   |
| ZY130              | 124 ... 141  | 300   | +9 ... +13  | 5                             | > 110.5  | 10   |
| ZY150              | 138 ... 156  | 300   | +9 ... +13  | 5                             | > 123  | 9  |
| ZY160              | 153 ... 171  | 350   | +9 ... +13  | 5                             | > 136  | 8.5  |
| ZY180              | 168 ... 191  | 350   | +9 ... +13  | 5                             | > 149  | 8  |
| ZY200              | 188 ... 212  | 350   | +9 ... +13  | 5                             | > 167  | 7.5  |

**Notes:** (1) Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case


(2) Tested with pulses  $t_p = 5 \text{ ms}$

(3) The ZY1 is a silicon diode operated in forward direction. Hence, the index of all parameters ratings should be "F" instead of "Z". Connect the cathode lead to the negative pole

**Ratings and  
Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Breakdown characteristics**

$T_j = \text{constant (pulsed)}$

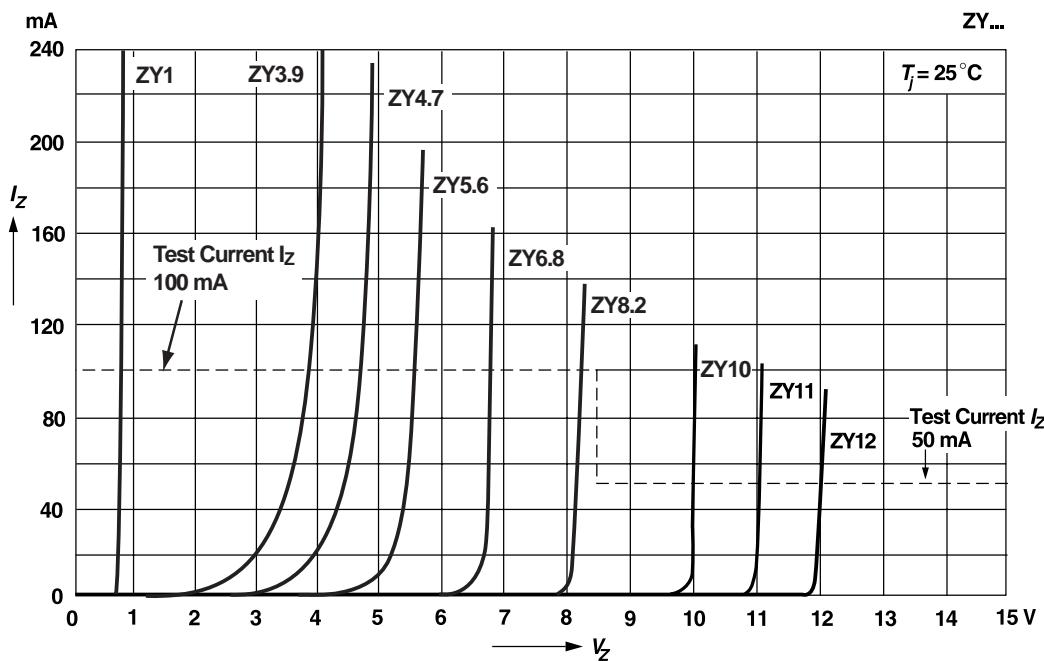

**Breakdown characteristics**


$T_j = \text{constant (pulsed)}$

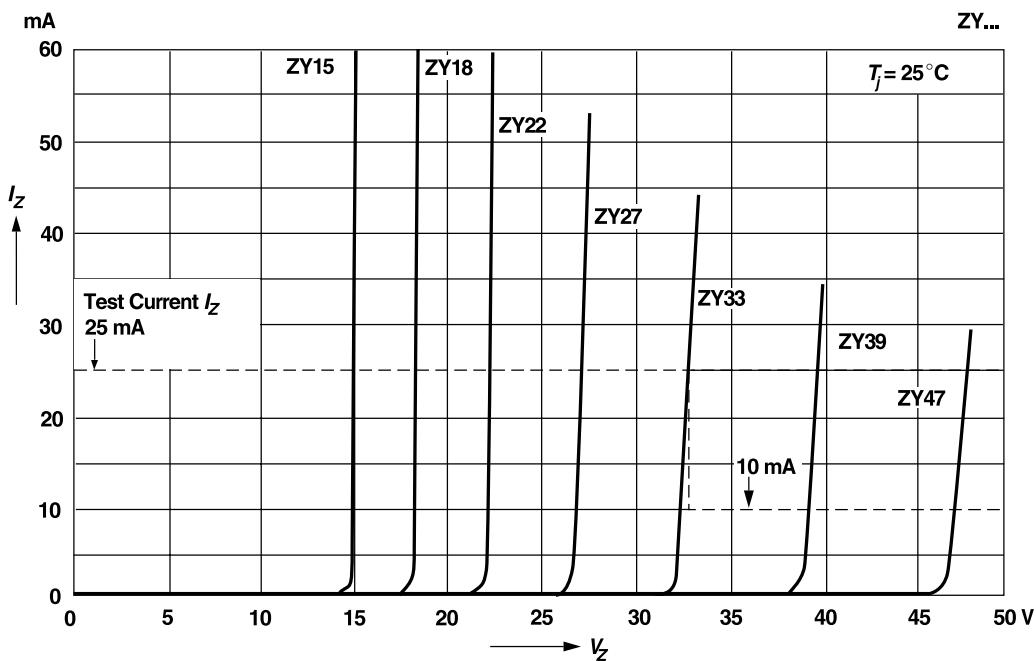

Ratings and  
Characteristic Curves ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


Breakdown characteristics

$T_j = \text{constant (pulsed)}$

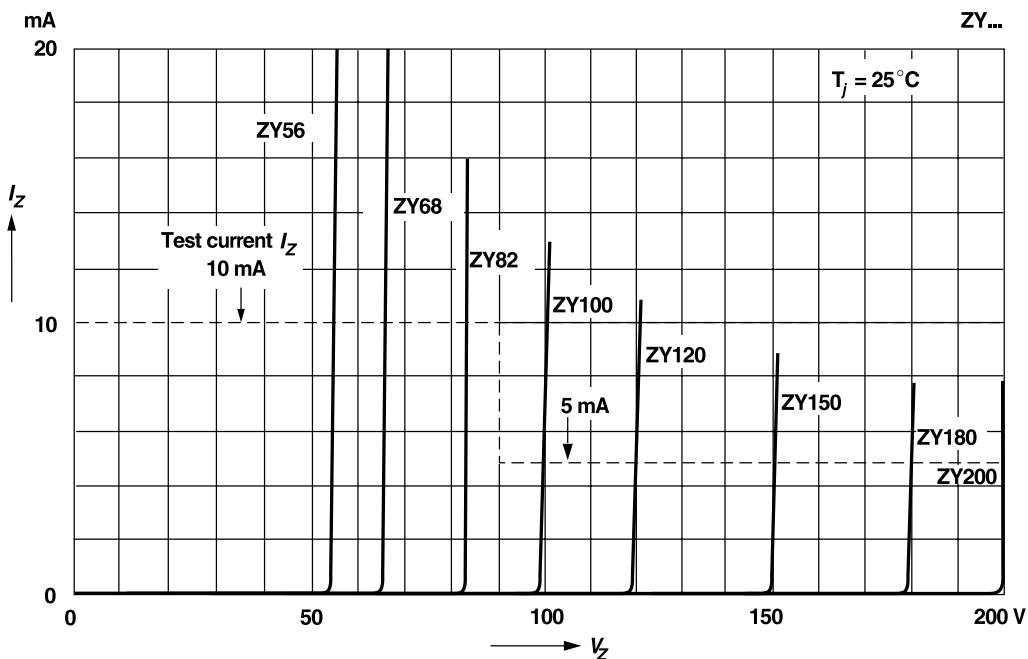


Admissible power dissipation  
versus ambient temperature

Valid provided that leads are kept at ambient temperature  
at a distance of 10 mm from case

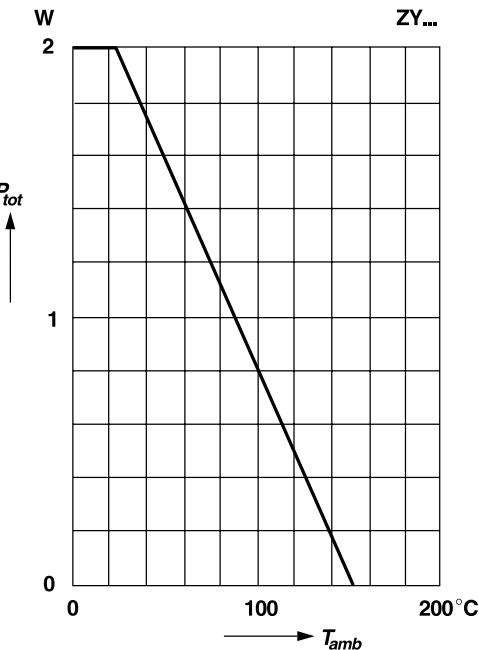


Dynamic resistance  
versus Zener current

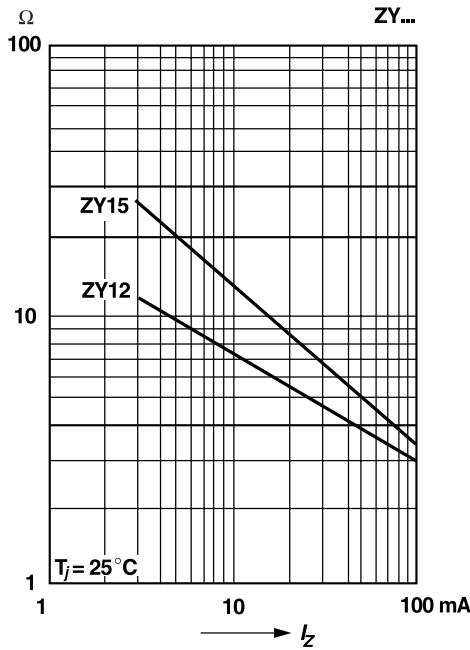


Ratings and  
Characteristic Curves ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


Dynamic resistance  
versus Zener current

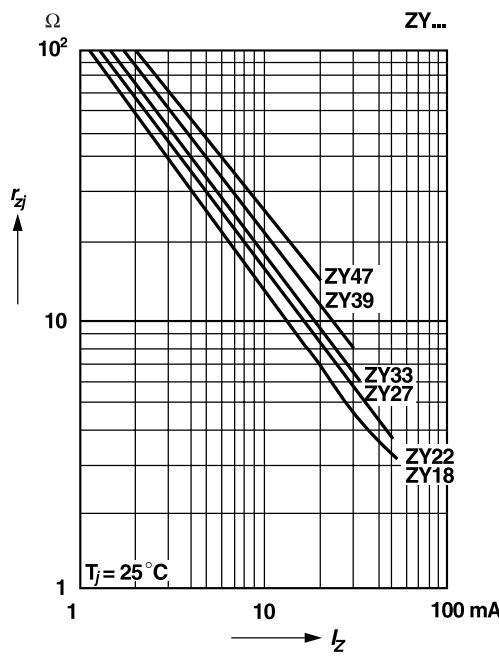


Thermal differential resistance  
versus Zener voltage

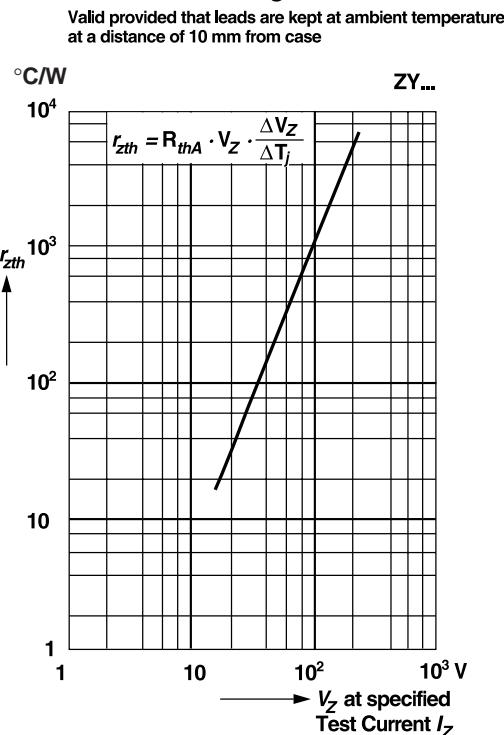

Dynamic resistance  
versus Zener current

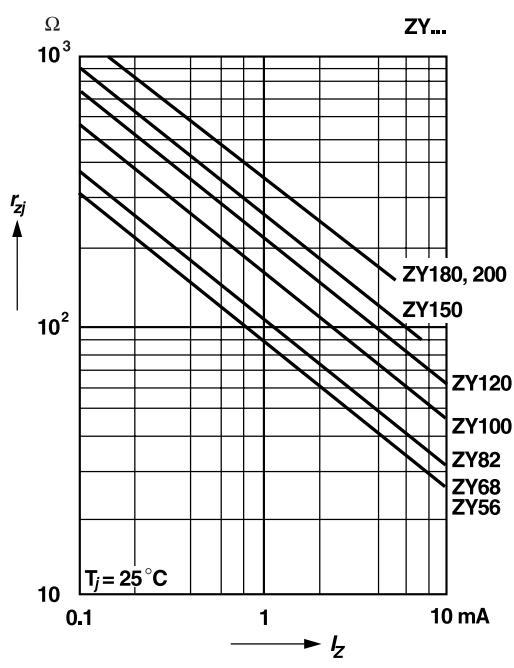


Change of Zener voltage from turn-on  
up to the point of thermal equilibrium  
versus Zener Voltage

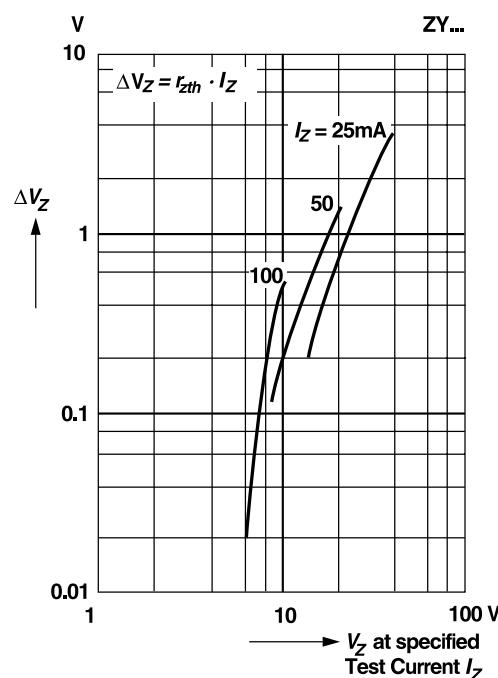


## Ratings and Characteristic Curves

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Relative change of Zener voltage  
versus turn-on time**

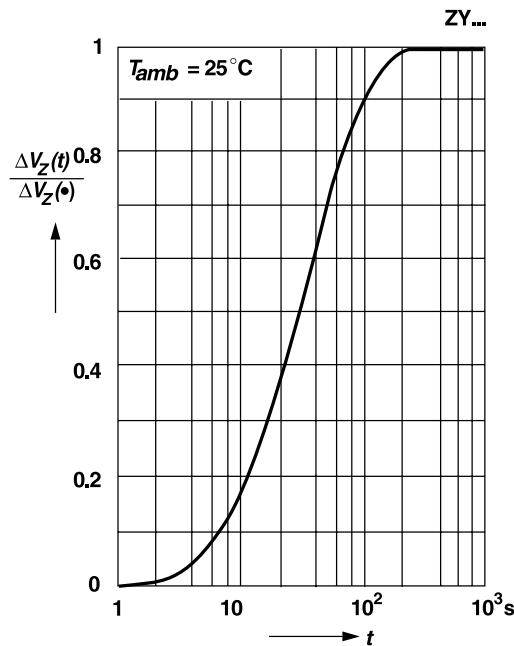


**Thermal resistance  
versus lead length**

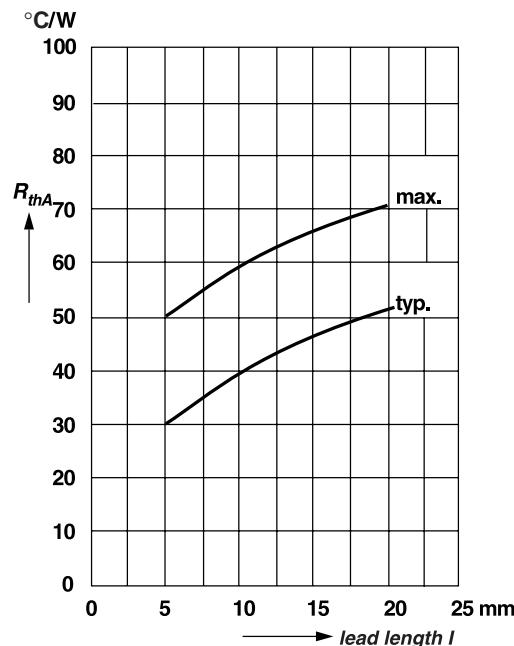


**Pulse thermal resistance  
versus pulse duration**

Valid provided that leads are kept at ambient temperature  
at a distance of 10 mm from case

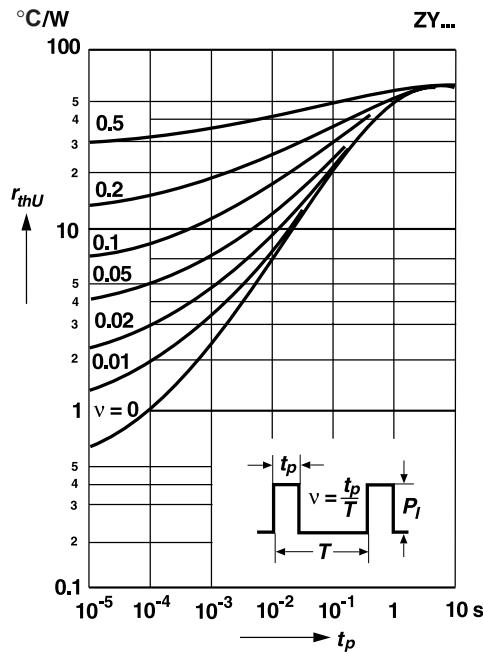


Ratings and  
Characteristic Curves (TA = 25°C unless otherwise noted)


Difference between Zener voltage  
at test current pulses less than 1 s duration  
and Zener voltage at the point of thermal  
equilibrium versus Zener current

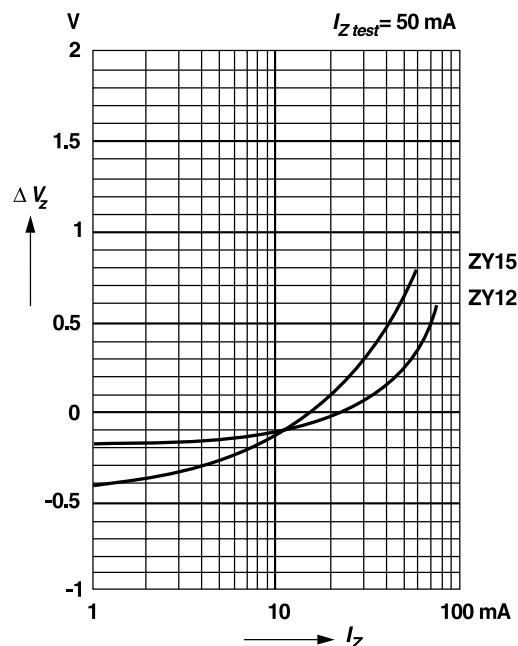

Difference between Zener voltage  
at test current pulses less than 1 s duration  
and Zener voltage at the point of thermal  
equilibrium versus Zener current

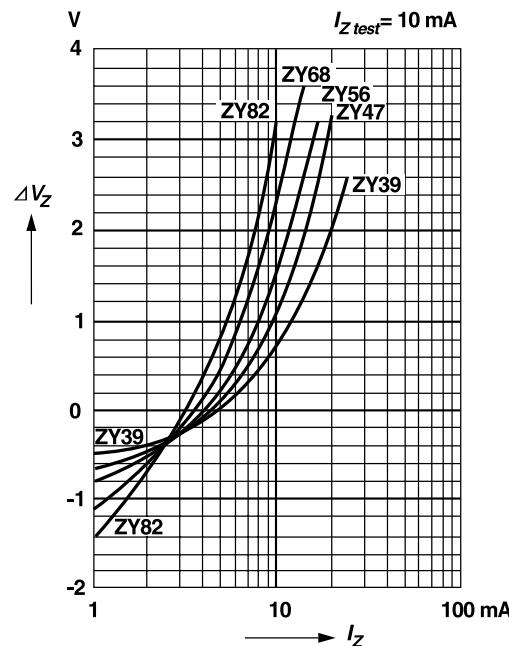

Difference between Zener voltage  
at test current pulses less than 1 s duration  
and Zener voltage at the point of thermal  
equilibrium versus Zener current

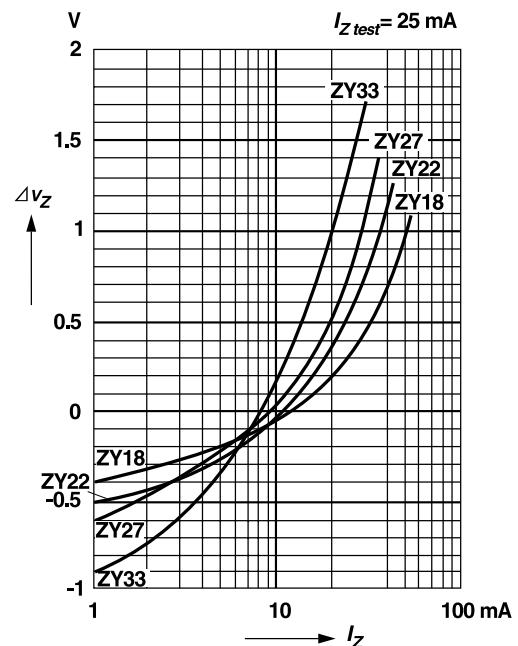

Difference between Zener voltage  
at test current pulses less than 1 s duration  
and Zener voltage at the point of thermal  
equilibrium versus Zener current

