


GSD

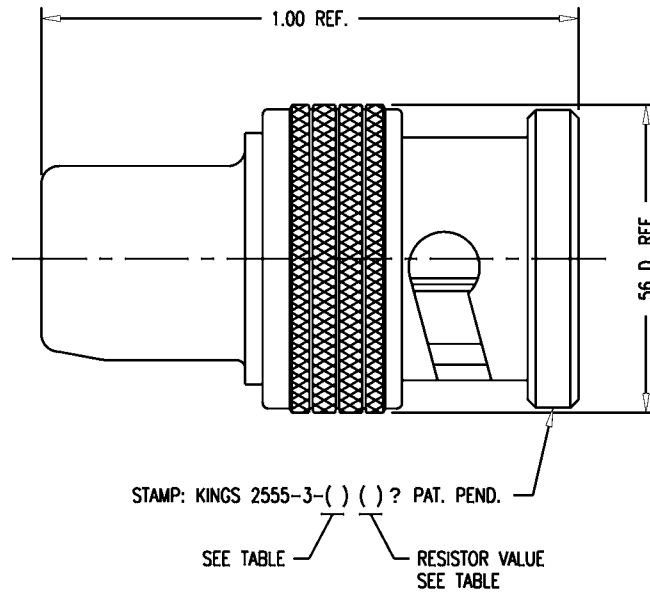

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 301-1.
2. MATERIALS:
 INSULATOR: TEFLON, ASTM-D-4894
 GASKET & O-RING: SIL. RUB., ZZ-R-765
 WASHER: PHOS. BRONZE, ASTM-B-103
 SPRING WASHER & OUTER CONTACT: BER. COP., ASTM-B-196
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
 CENTER CONTACT: SEE TABLE (SHEET 2 OF 2)
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:
 CHARACTERISTIC IMPEDANCE: 75 OHMS
 RESISTOR VALUE: SEE TABLE (SHEET 2 OF 2)
 TEMPERATURE 1/2 W @ 25c

2555-3-() (SHEET 1 OF 2)

REVISIONS

| ISSUE | CHANGES |
|-------|---------------------------------------|
| 2 | CN 33987 E REDRAWN JCA 06/25/92 |
| 3 | CN 36686 D KH 11/08/95 |
| 4 | CN 37155 C PG 10/24/96 |

JCA2912

| | |
|-------------------------------|---------------|
| SCALE 4:1 | |
| APPROX SURFACE AREA | |
| USED ON | |
| REF: | |
| TERMINATION, 1/2 WATT, 75 BNC | |
| DRAWN JCA | DATE 06/25/92 |
| DESIGN DW | DATE 06/26/92 |
| APPR. | DATE |

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2555-3-()
(SHEET 1 OF 2)

GSD