


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

# GSD

KC-59-109

### REVISIONS

ISSUE	CHANGES
9	CN 39383 E REDRAWN DRK 01/04/06

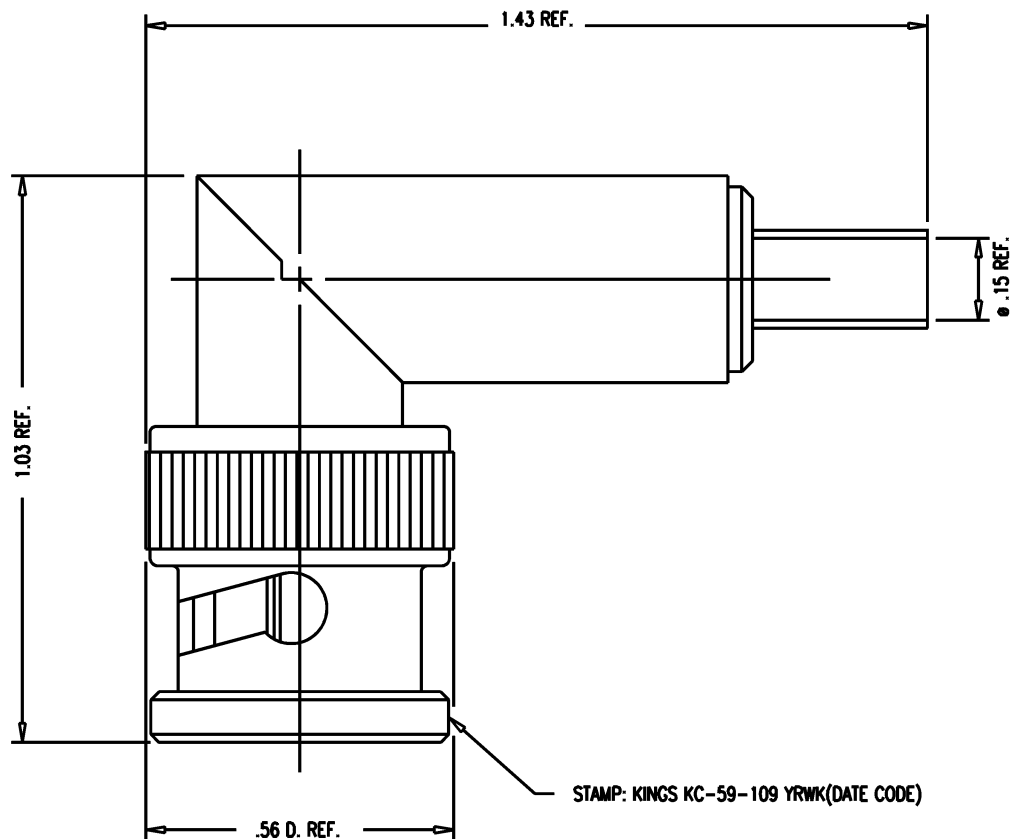

#### NOTES:

- FOR USE WITH RG-174, 179, 187 AND 188 /U CABLES.
- FOR CABLING INSTRUCTIONS SEE CP-406.
- FOR CRIMPING USE DIE SIZE 32.
- INTERFACE PER MIL-STD-348, FIG. 301-1.
- MATERIALS:
  - INSULATORS: TEFLON, ASTM-D-4894
  - GASKET: SILICONE RUBBER, A-A-59588
  - K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
  - ANGLE CONTACT } BER. COPPER, ASTM-B-196
  - OUTER CONTACT }
  - SPRING WASHER }
  - ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
  - ALL METAL PARTS: SILVER PLATE PER ASTM-B700.
- ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE: 50 OHMS
  - WORKING VOLTAGE: 500 VRMS
  - FREQUENCY RANGE: DC TO 4 GHz

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: MCDONNELL DOUGLAS, SM3088-1

PLUG, ANGLE, BNC

DRAWN DRK	02/16/05
DESIGN	DATE
APPR.	DATE

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

KC-59-109

# GSD