



MICRO SWITCH



FREEPORT, ILLINOIS, U S A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

2HM1-6

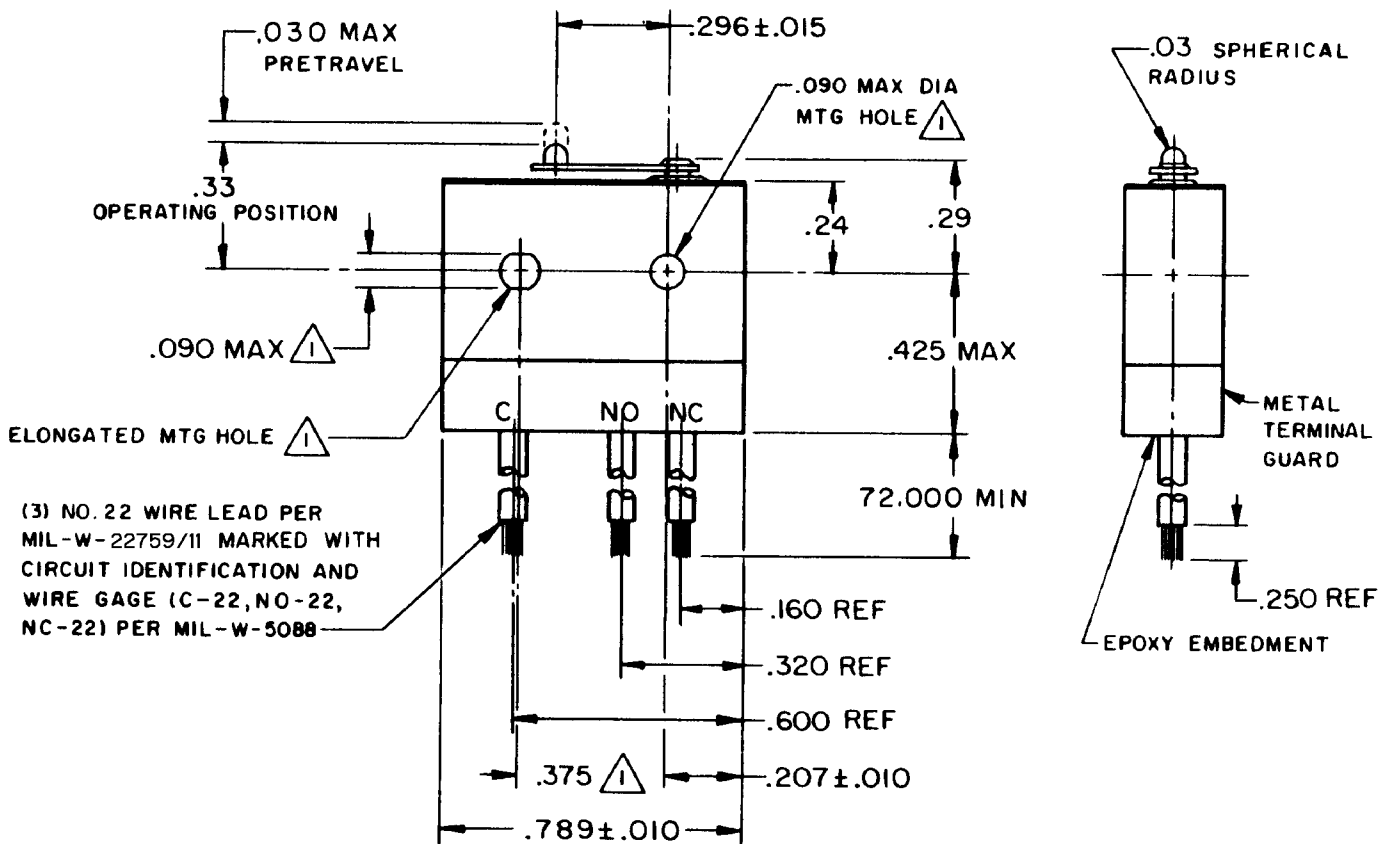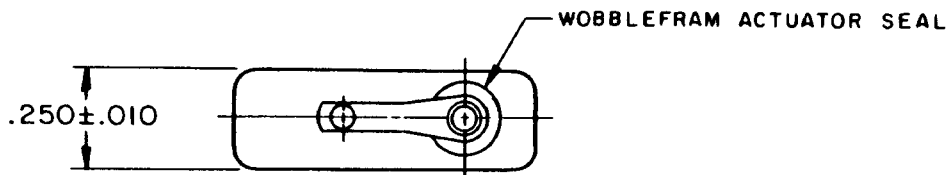

(3) NO. 22 WIRE LEAD PER MIL-W-22759/11 MARKED WITH CIRCUIT IDENTIFICATION AND WIRE GAGE (C-22, NO-22, NC-22) PER MIL-W-5088

NOTES

- $\Delta 1$ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -85° F TO +250° F (DOWN TO -300° F IF WIRE LEADS ARE NOT FLEXED)
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
- $\Delta 5$ WEIGHT OF SWITCH ONLY IS 0.22 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 0.20 OZ MAX PER FOOT
- 6 - DO NOT APPLY MORE THAN 1 1/2 INCH LB OF TORQUE WHEN TIGHTENING MOUNTING SCREWS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 7 OZ MAX

RELEASE FORCE — — — — 1 OZ MIN

DIFFERENTIAL TRAVEL — — — .006 MAX

OVERTRAVEL — — — — .003 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT S P D T		
LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD
28 VDC	3 AMP	5 AMP
115 VAC (400 CYCLE)	2 AMP	2 AMP

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES $\Delta 5$

WEIGHT $\Delta 5$

2HM1-6

PAGE 1 OF 1

M

DRAWING NUMBER

ISSUE 10

REPLACES RELEASE NO. PR-8633

REVISIONS

A	MADE P ORDER	8 SEPT 67
B	MADE ETS	5 JUN 70
C	CO-32230	24 JUL 73
D	PR8633	
S L B		9 APR 80
E	CO 52357	
R J H		18 NOV 82
F	CO52357-2	
K A G		30 DEC 82
G	CO71228	
D A W		1 NOV 91
H	CO82984	
D L T		17 MAY 96
J	CO94220	
D L T		24 MAR 99

FORMTEK

FO-90378

DRAWN

M B F 1 MAY 67