

HONEYWELL
PART NUMBER
GKNC12L

REV	DOCUMENT	CHANGED BY	CHECK
A	0003478	VA 02APR04	AK

Mechanical features

Enclosure: Thermoplastic, glass fibre reinforced (UL94-V0)
Cover: Thermoplastic, glass fibre reinforced (UL94-V0)
Actuator: separate actuator (Steel-stainless steel)
Temperature: -30°C up to +80°C
Contact type: 2 NC-contact, 1 NO-contact (Zb)
Mechanical life: 1x10⁶ switch operations
Switch frequency: 30/min
Mounting: enclosure 2xM5, actuator 2xM5
Connection type: 6 screw connections M3
Conductor cross-section: single core 0.5-1.5mm²

Cable entry size: 2 x M20x1.5
Weight: approx. 0.15 kg
Mounting position: selectable
Protection class (IP-Code): IP65 according to EN 60529, DIN VDE 0470 T1

The rated protection class (IP-Code) is valid only with closed cover and when using an at least equivalent cable gland.

Electrical features

Rated insulation voltage: U_i = 400V AC B300/ 150V DC R150
Conventional thermal current: I_{th} = 6A AC/ 1A DC
Utilization categorie: AC-15 / DC-13
Short circuit protection: Fuse 6A gI/gG, IEC/EN 60947-5-1, appendix K
CSA: 6A 300V AC, B300 (some pol.)

Approvals




Standards

VDE 0660 T100, EN 60947-1
VDE 0660 T200, EN 60947-5-1
IEC 947-5-1
GS-ET 15


Positive opening operation according to DIN EN 60947-5-1 IEC 60947-5-1

Approach possibilities

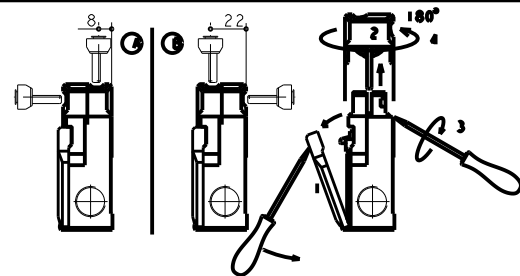


Specials / Remarks


- Turning the cap (pos A/B) allow 4 different directions of drive
- Cover (1) has to be opened before turning the cap (2).
- Insert the screwdriver into the gap between housing and cap and turn until the cap snaps off.
- Remove the cap, turn it 180° (4), latch it into the housing and close the cover.
- Radial actuation may reduce the mechanical life.
- The min. radius refers to a pivot at the top of the cap.
- Unused actuator entry slot must be covered by the plug.
- Do not use the switch as end stop.



Switch diagram

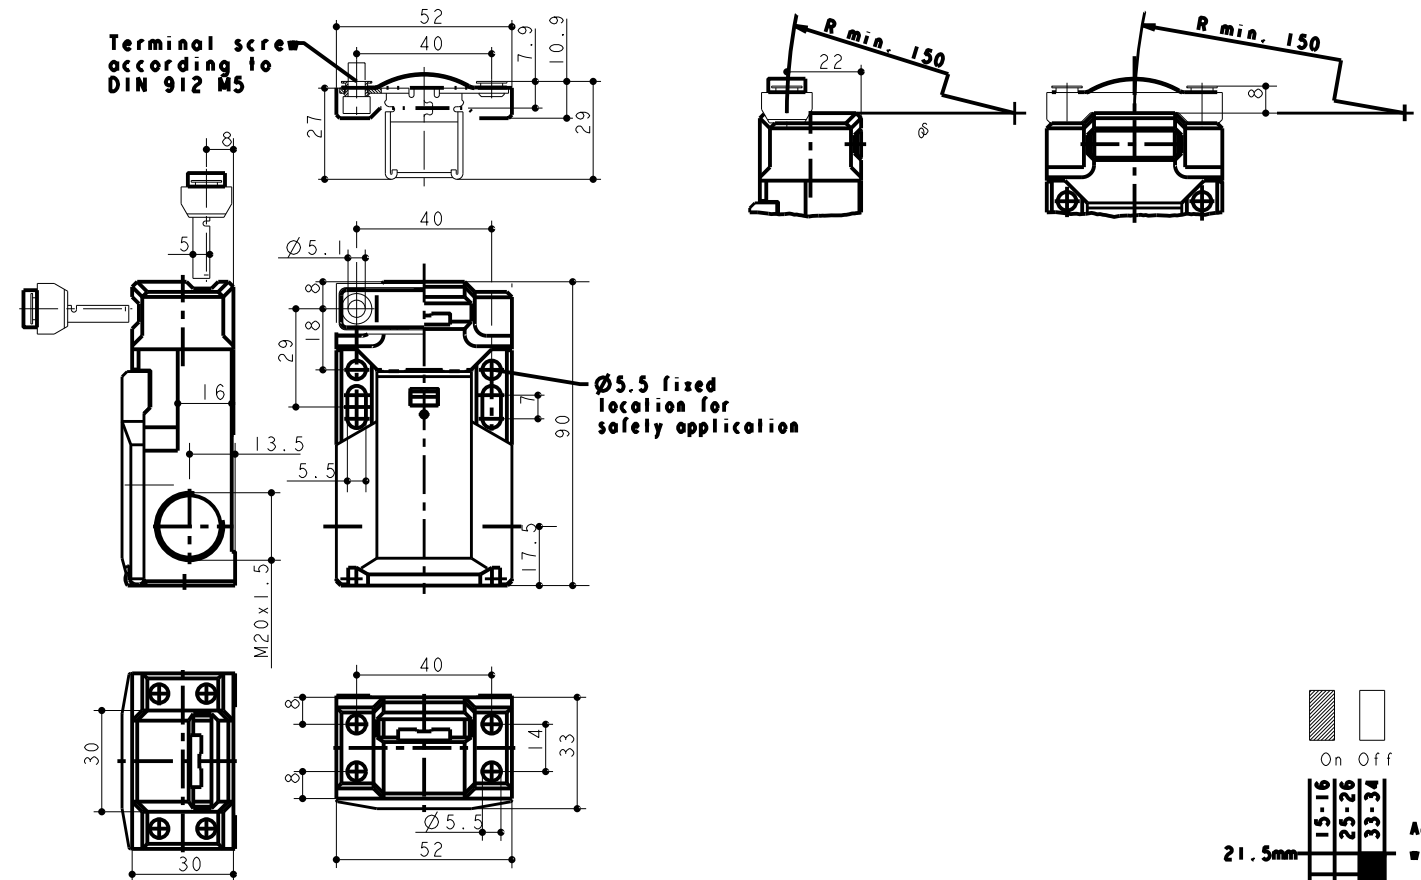

- NOTES
- ALL DIMENSIONS FOR REFERENCE ONLY
 - KEY INSERTION FORCE: 2 N REF.
 - KEY EXTRACTION FORCE: 10 N ± 1 N
 - TOLERANCE OF OPERATION: ± 0,25 mm
 - KEY SHOWN FOR REFERENCE ONLY, MUST BE PURCHASED SEPARATELY

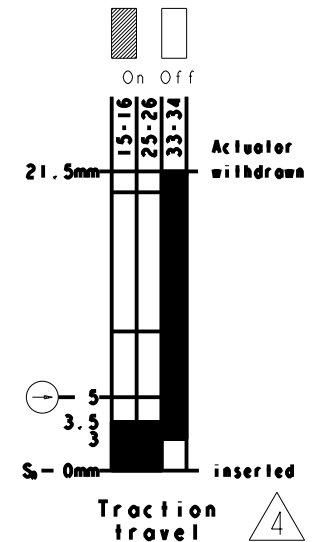

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	0
ONE PLACE	.X	±	0.1
TWO PLACE	.XX	±	0.01
THREE PLACE	.XXX	±	0.001
FOUR PLACE	.XXXX	±	0.0001
ANGLES	X	±	0

THIRD ANGLE PROJECTION

DRAWN	VA	02APR04
CHECK	AK	02APR04
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
Pro/ENGINEER		

Honeywell			
TITLE SWITCH - DOOR INTERLOCK			
SIZE	TYPE	DRAWING NAME	REV
B	I	GKNC12L	A
SCALE NONE		SHEET 1 OF 1	