MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSQUC5K272

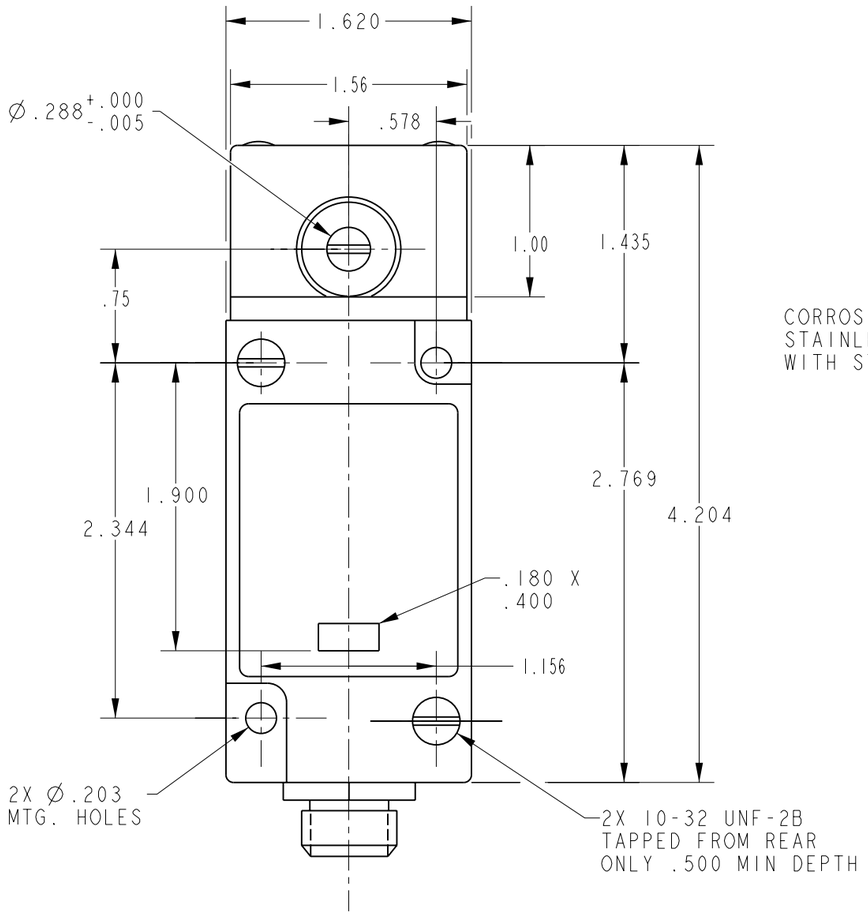

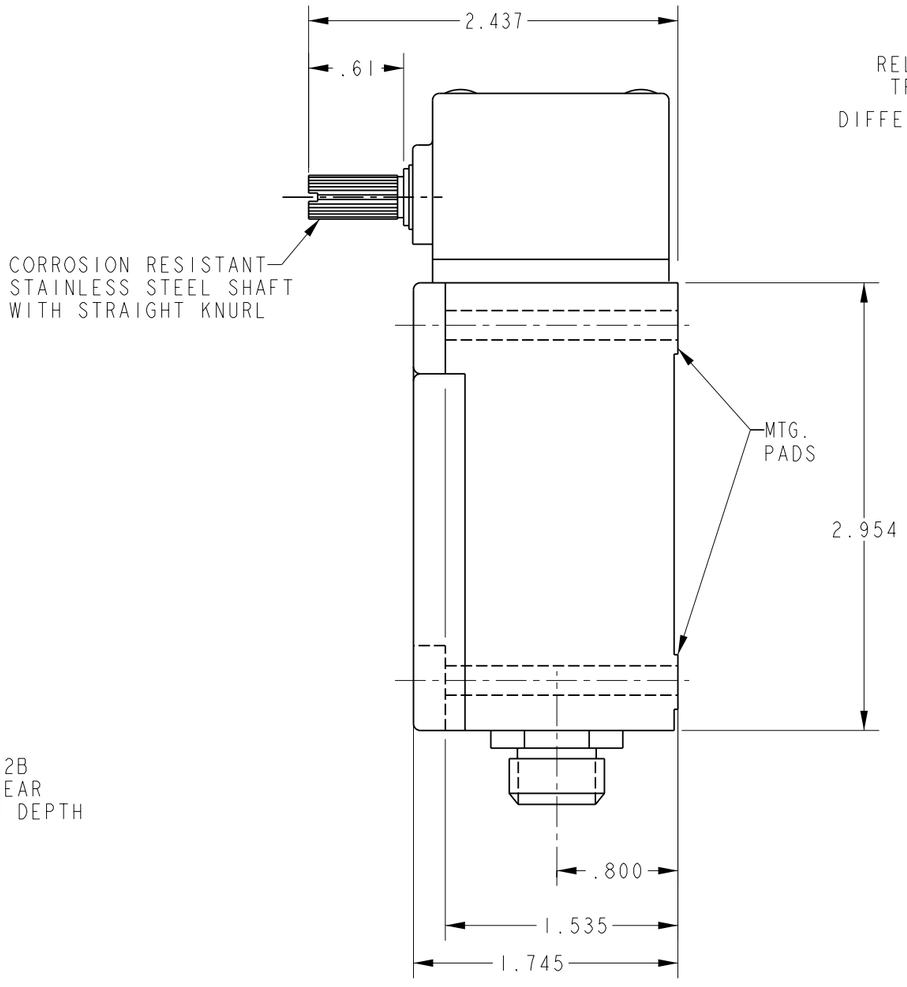

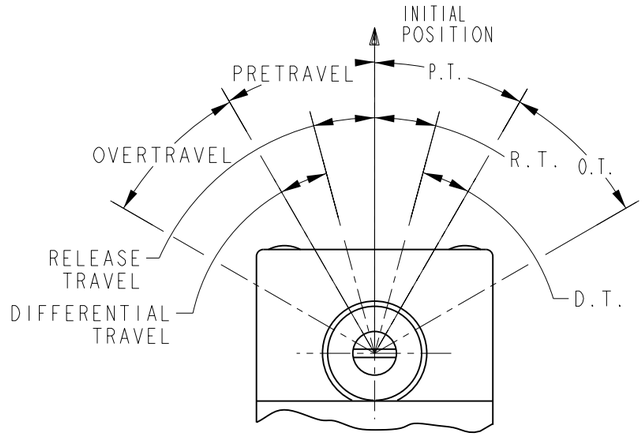

OPERATING DATA - SIDE ROTARY

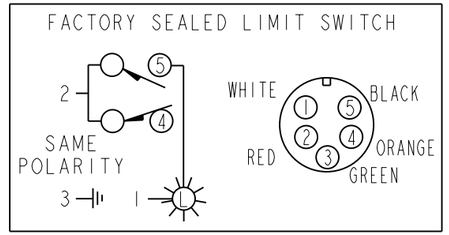

NOTES
1 - WOODHEAD 5 PIN MINI CONNECTOR
2 - BASIC SWITCH TERMINAL AREA AND CONNECTOR EPOXY SEALED IN HOUSING

CHARACTERISTICS	
OPERATING TORQUE	4 IN LBS MAX
FULL TRAVEL TORQUE	4 IN LBS MAX
TOTAL TRAVEL	85° REF
PRETRAVEL	5° MAX
DIFFERENTIAL TRAVEL	3° MAX
OVERTRAVEL	80° MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING LSQUC5K272 PAGE 1 OF 1 | ISSUE 1 | RELEASE NO. PR-22817 | REPLACES

REVISIONS

	CHECK	
S A V	CHECK	22 MAY 97
S A V	CHECK	
	CHECK	
	CHECK	
	CHECK	
	CHECK	
S A V	CHECK	22 MAY 97
PTC/CAD	DRAWN	