

**MICRO SWITCH**  
a Honeywell Division


FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING  
V7-2H15D8-000-2

CW-B3521

CATALOG LISTING  
V7-2H15D8-000-2  
REPLACES  
RELEASE NO. PR-17817  
ISSUE  
6

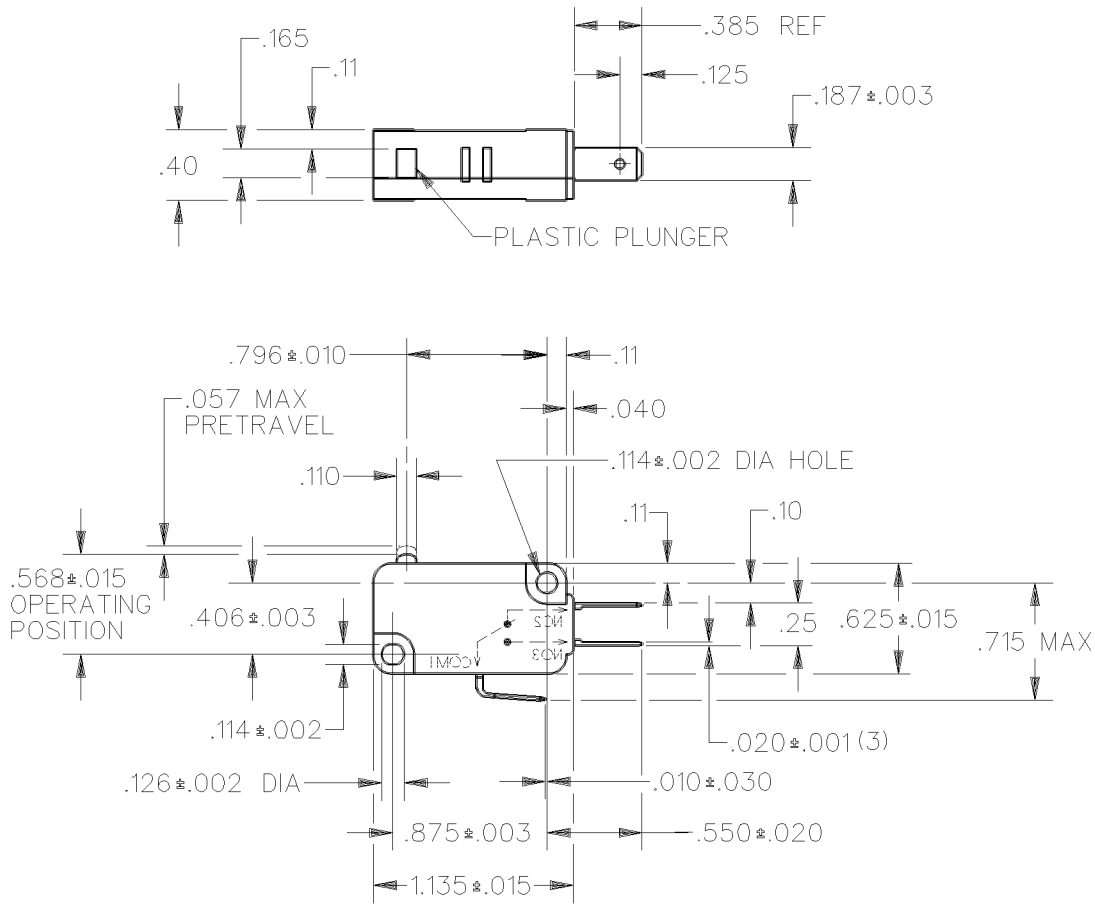

NOTE


- 1 - SWITCH WILL OPERATE AND RELEASE WITHIN FULL EXCURSION OF THE PLUNGER
- 2 - SWITCHES TO BE BULK PACKED 1000 PER BAG, 1 BAG PER BOX

REVISIONS

A	CO-69800	BAB	13 MAR 91
B	CO-72840	JWB	12 JAN 93
C	CO-76101	KDR	04 OCT 93
D	CO-76897	DCS	23 FEB 94
E	CO-77197	DCS	10 MAY 94

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T	SCALE	FULL	DO NOT SCALE PRINT
		<p><b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b></p> <p>ONE PLACE (.0) ±.030</p> <p>TWO PLACE (.00) ±.015</p> <p>THREE PLACE (.000) ±.005</p> <p>ANGLES ±</p> <p>WEIGHT</p>		
OPERATING FORCE — — — 75 GRAMS MAX				
RELEASE FORCE — — — 10 GRAMS MIN				
DIFFERENTIAL TRAVEL — — — .002-.010				
OVERTRAVEL — — — — .040 MIN				
FREE POSITION — — — — .625 MAX				
RELEASE TRAVEL — — — — .010 MIN				

DDM/CAD  
DRAWN  
TJA  
5 DEC 89  
CHECK  
DCS  
7 DEC 89