FO-50360-L

CW-C4035

REV	DOCUMENT	CHANGED BY	CHECK
4	202161	GJW 23JAN01	SAV

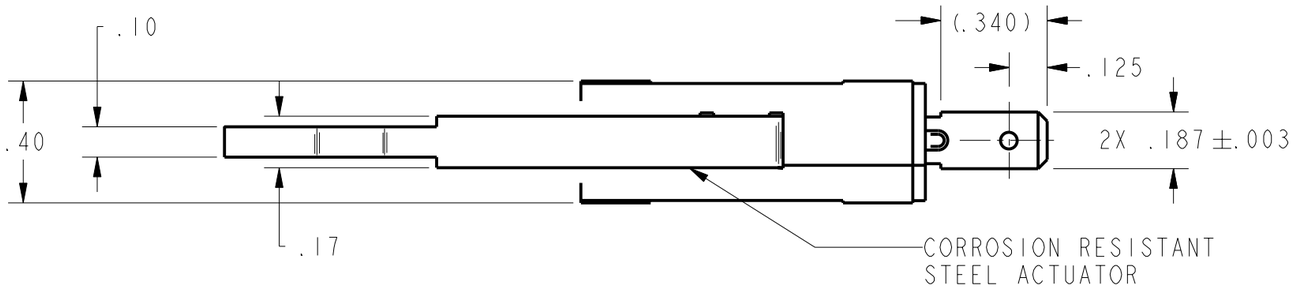

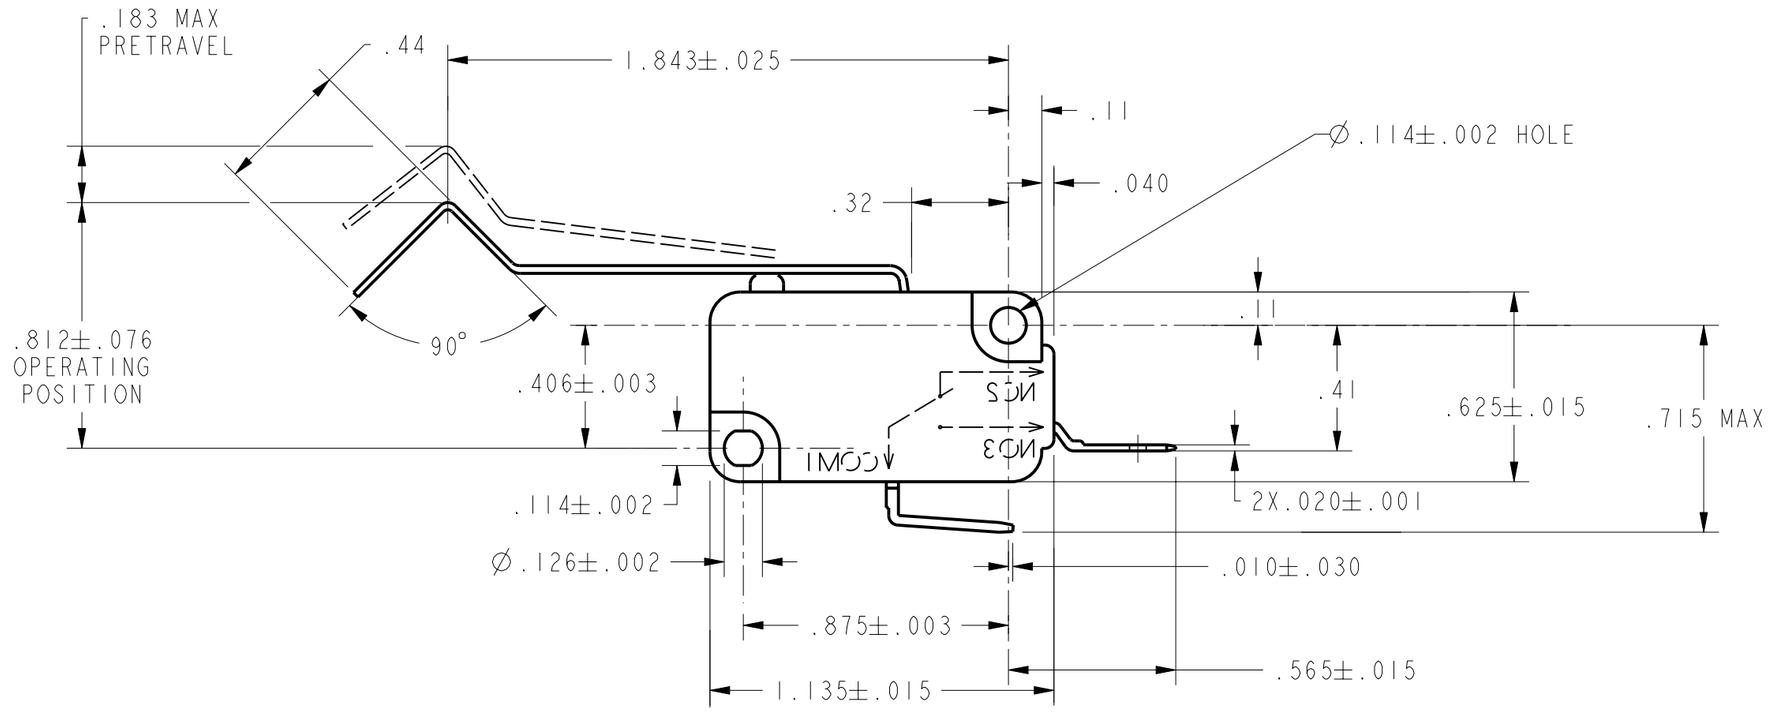

NOTES

1 2 - FORCE CHARACTERISTICS TAKEN WITH SWITCH MOUNTING SURFACE HORIZONTAL
OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON THE PLUNGER EXCEEDING 5 POUNDS

CHARACTERISTICS 1	
OPERATING FORCE	10 GRAMS MAX
DIFFERENTIAL TRAVEL	.040 MAX
OVERTRAVEL	.097 MIN
RELEASE TRAVEL	.023 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

L162 5A 125, 250, 277 VAC
1/10HP 250 VAC

3 (1) ~ 250
T85 1E5 µ

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		± 3°	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	GJW	23JAN01
CHECK	SAV	23JAN01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell
Sensing and Control

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	M	V7-4A29E8-424	4

SCALE NONE | WEIGHT | SHEET 1 OF 1