


CWC6156
SUPERSEDES: X115465-V7

REV	DOCUMENT	CHANGED BY	CHECK
B	0042167	PRS 05AUG08	BLR

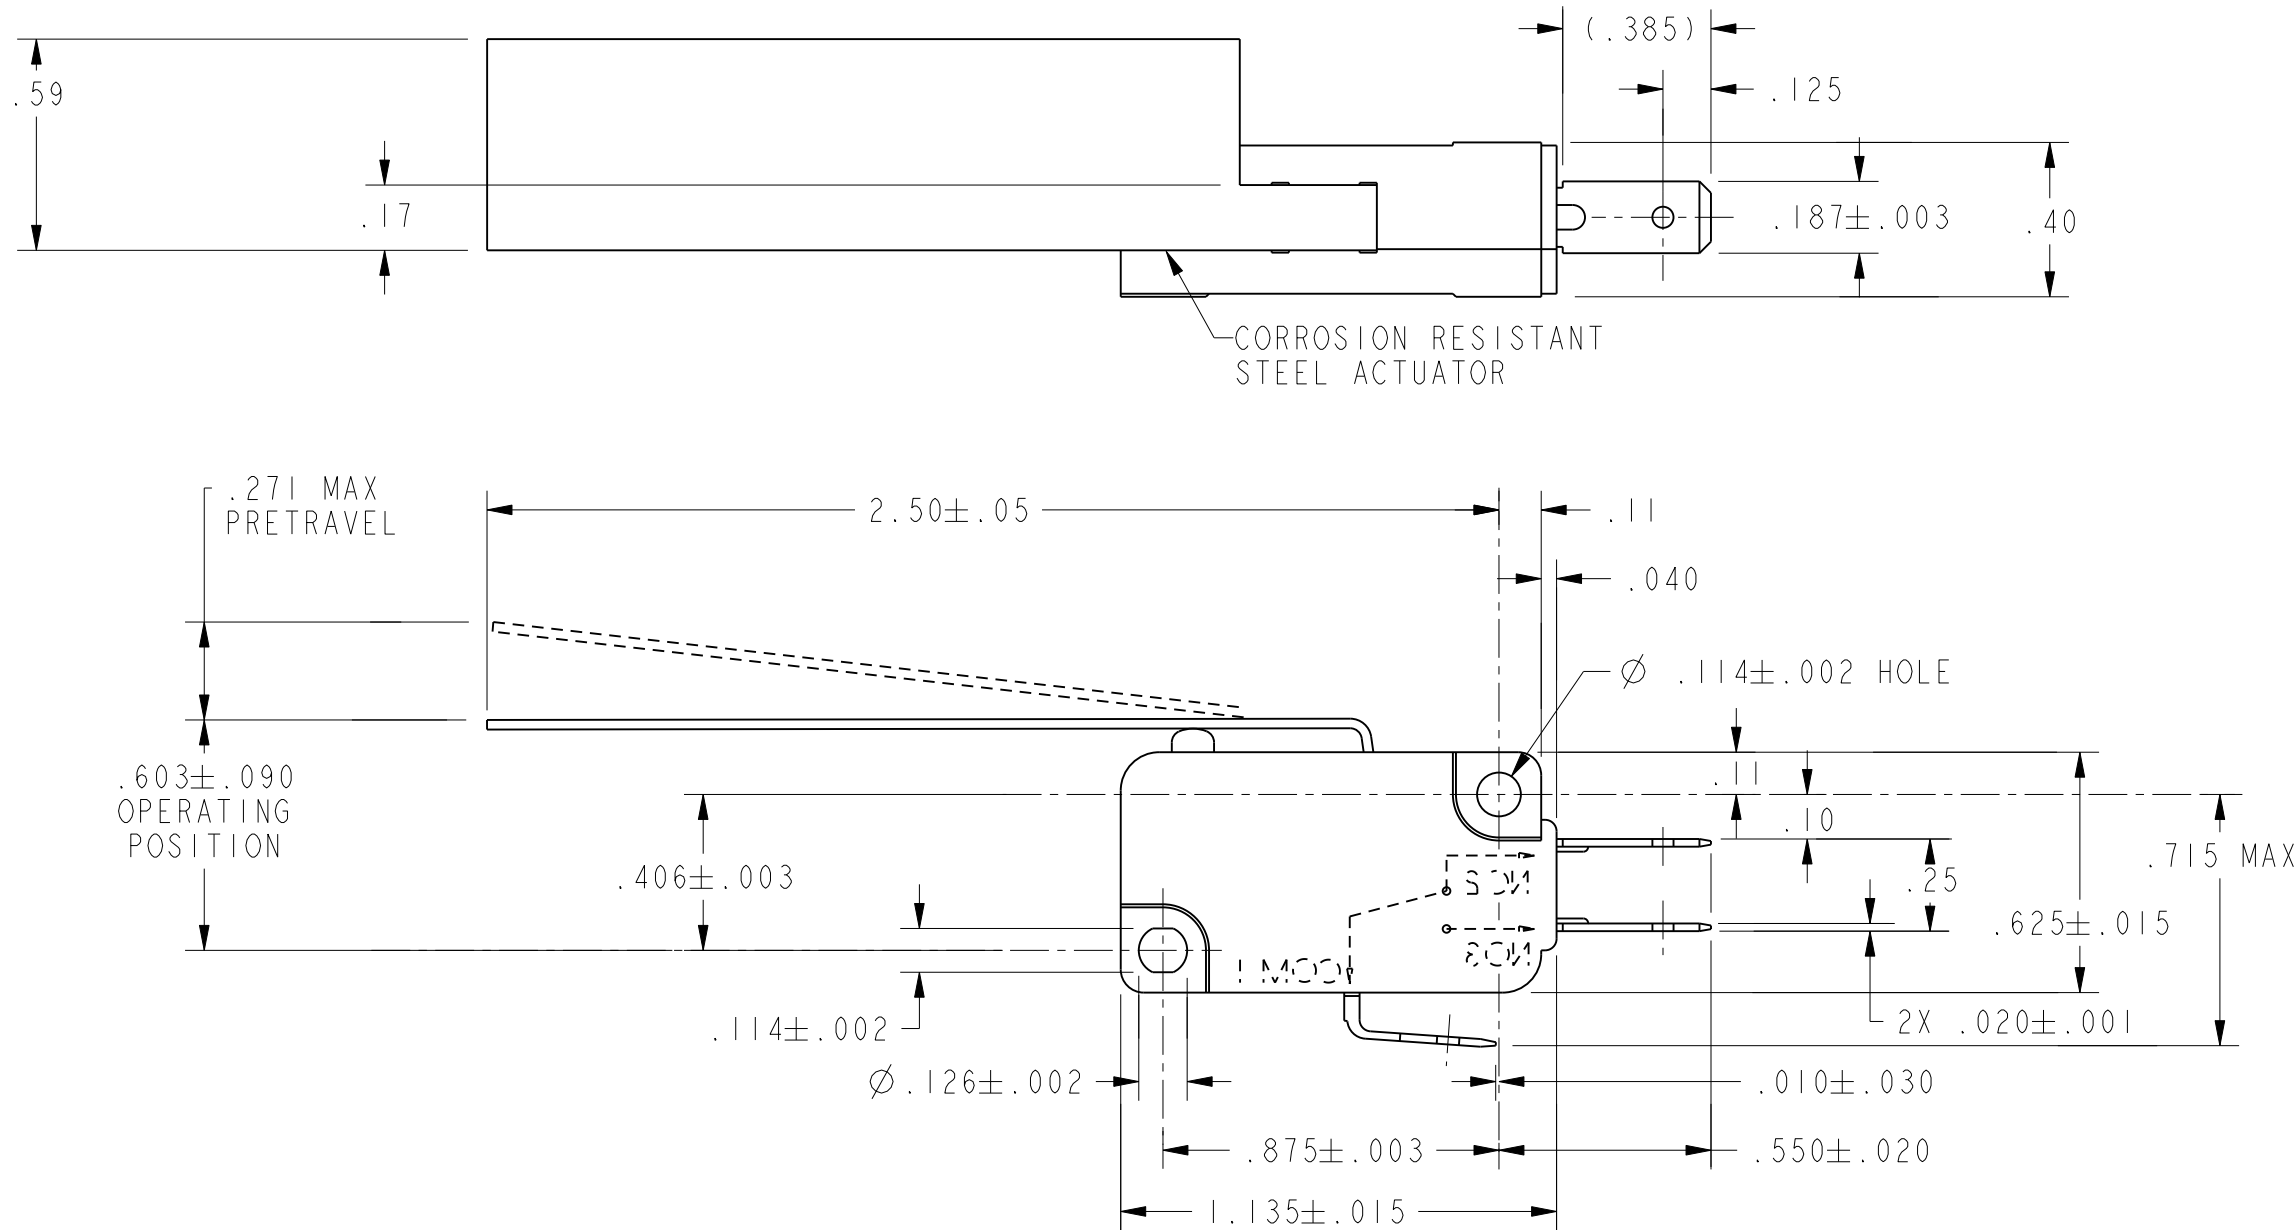

CHARACTERISTICS	
OPERATING FORCE-----	64 GRAMS MAX
RELEASE FORCE-----	8.5 GRAMS MIN
DIFFERENTIAL TRAVEL-----	.059 MAX
OVERTRAVEL-----	.132 MIN
RELEASE TRAVEL-----	.032 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT	
S P D T	
L215	15.1A 1/2HP 125, 250 OR 277 VAC
	1/2A 125 VDC
	1/4A 250 VDC; 5A 125 VAC "L"

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			
	US (inch) CUSTOMARY	SI (mm) METRIC	
NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±
RAW MATERIAL-COMMERCIAL STANDARD			
THIRD ANGLE PROJECTION			

DRAWN	AS	26 APR 04
CHECK	AK	26 APR 04
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
PTC 2D	ASME Y14.5M-1994	

Honeywell			
TITLE SWITCH, BASIC			
SIZE	DWG TYPE	DRAWING NAME	REV
B	I	V7-7C19D8-640	B
SCALE	NONE	WEIGHT	SHEET 1 OF 1