


## Socket strip - FRONT-ZFL 1,5/D32 - 2201632


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



19" socket strip, number of positions: 32, pitch: 5.08 mm, color: green



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 017918 902001
GTIN	4017918902001
Weight per Piece (excluding packing)	58.000 g
Custom tariff number	85366990
Country of origin	China

### Technical data

#### Dimensions

Length	28.5 mm
Height	20.3 mm
Width	94.7 mm
Pitch	5.08 mm
Dimension a	5.08 mm

#### General

Range of articles	FRONT-ZFL 1,5
Insulating material group	I
Rated surge voltage (II/2)	4 kV
Connection in acc. with standard	EN-VDE

## Socket strip - FRONT-ZFL 1,5/D32 - 2201632

### Technical data

#### General

Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Nominal cross section	1.5 mm <sup>2</sup>
Insulating material	PBT
Flammability rating according to UL 94	V0
Stripping length	11 mm
Number of positions	32

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	1.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings

# Socket strip - FRONT-ZFL 1,5/D32 - 2201632

Dimensional drawing

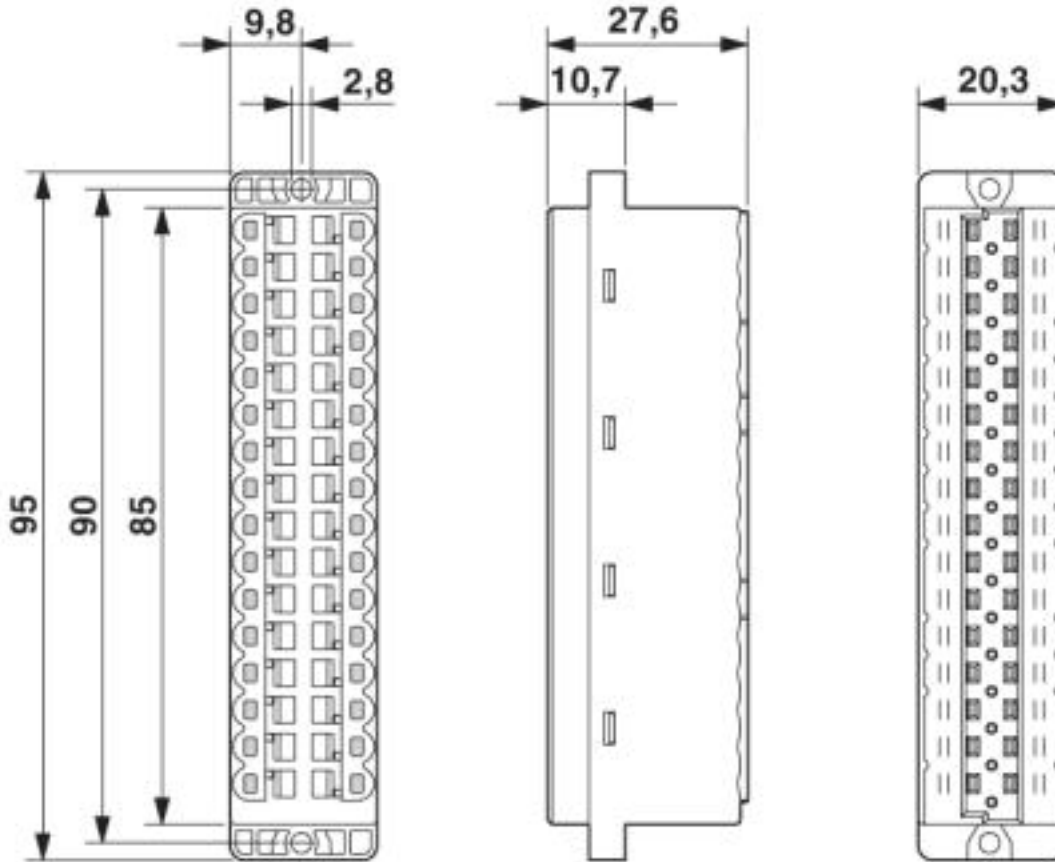

## Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27261100
eCl@ss 6.0	27261100
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498

# Socket strip - FRONT-ZFL 1,5/D32 - 2201632

## Classifications

### ETIM

ETIM 5.0	EC002643
ETIM 6.0	EC002643
ETIM 7.0	EC002643

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121432

## Approvals

### Approvals


Approvals

EAC / cULus Recognized

Ex Approvals

### Approval details

EAC		B.01742
-----	---	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-20020920
	B	D	
Nominal voltage UN	300 V	300 V	
Nominal current IN	4 A	4 A	
mm <sup>2</sup> /AWG/kcmil	24-16	24-16	