

## Surge protection device - CN-LAMBDA/4-5.9-BB - 2838490

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces. Connection: N connectors socket-socket

### Product Features

- High HF power in the kW range
- Outdoor surge protection
- As an adapter between devices and cables
- Maintenance-free surge protection with LAMBDA/4 technology
- Low protection level



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	140.19 g
Custom tariff number	85363010
Country of origin	United States

### Technical data

#### Dimensions

Height	38 mm
Width	26.1 mm
Depth	60 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 90 °C
Degree of protection	IP68

#### General

Housing material	Brass (CuZn)
Color	nickel

# Surge protection device - CN-LAMBDA/4-5.9-BB - 2838490

## Technical data

### General

Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Number of positions	1
Direction of action	Line-Shield/Earth Ground

### Protective circuit

IEC test classification	C2
	C3
	D1
VDE requirement class	C2
	C3
	D1
Nominal current $I_N$	5 A (25 °C)
Nominal discharge current $I_n$ (8/20) $\mu$ s (Core-Earth)	50 kA
Nominal discharge current $I_n$ (8/20) $\mu$ s (Core-Shield)	50 kA
Total surge current (8/20) $\mu$ s	60 kA
Total surge current (10/350) $\mu$ s	20 kA
Max. discharge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Earth)	60 kA
Max. discharge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Shield)	60 kA
Impulse discharge current (10/350)# $\mu$ s, peak value $I_{imp}$	$\leq 20$ kA
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 11$ V (6 kV/3 kA)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Shield) spike	$\leq 11$ V (6 kV/3 kA)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) static	$\leq 11$ V (6 kV/3 kA)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Shield) static	$\leq 11$ V (6 kV/3 kA)
Voltage protection level $U_p$ (core-ground)	$\leq 11$ V (6 kV/3 kA)
Voltage protection level $U_p$ (core-shield)	$\leq 11$ V (6 kV/3 kA)
Input attenuation aE, asym.	typ. 0.05 dB ( $\leq 0.15$ dB)
Frequency range	2.4 GHz ... 5.9 GHz
Standing wave ratio SWR in a 50 $\Omega$ system	typ. 1.1 ( $\leq 1.20$ (2.4 GHz...5.9 GHz))
Permissible HF power $P_{max}$ at VSWR = xx (50 ohm system)	$\leq 500$ W
	$\leq 4$ kW (peak)
Impulse durability (conductor-ground)	C2 - 10 kV/5 kA
	D1 - 2,5 kA
Impulse durability (conductor-shield)	C2 - 10 kV/5 kA
	D1 - 2.5 kA

### Connection data

Connection method	N Connector
-------------------	-------------

# Surge protection device - CN-LAMBDA/4-5.9-BB - 2838490

## Technical data

### Connection data

Connection type IN	N connector, female
Connection type OUT	N connector, female

### Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Approvals

### Approvals

---

Approvals

EAC / EAC

---

# Surge protection device - CN-LAMBDA/4-5.9-BB - 2838490

## Approvals

Ex Approvals

---

Approvals submitted


## Approval details

EAC

EAC

## Drawings

Dimensional drawing

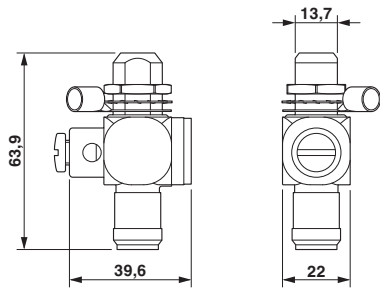

Circuit diagram

