

## Jumper - BRIDGE-10-3M - 2901702

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




3-phase loop bridge for 10 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m, with ferrules included.

### Your advantages

- ✓ Only suitable for CONTACTRON series with screw connection ELR H3...-SC-..., ELR H5...-SC-..., EMM...IFS
- ✓ Bridging of 2 to 10 devices with maximum module spacing of 22.5 mm
- ✓ Considerable reduction in wiring
- ✓ Up to 575 V AC/3 x 25 A



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 624978
GTIN	4046356624978
Weight per Piece (excluding packing)	560.000 g
Custom tariff number	85444290
Country of origin	Germany

### Technical data

#### Dimensions

Width	22.5 mm
Length of the connecting cable	3 m

#### General

Operating voltage range	42 V AC ... 575 V AC
Operating current	≤ 25 A

# Jumper - BRIDGE-10-3M - 2901702

## Technical data

### General

Number of bridgeable modules	10
Connecting cable length	3 m
Color	gray
Conductor cross section	2.5 mm <sup>2</sup>

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Application drawing

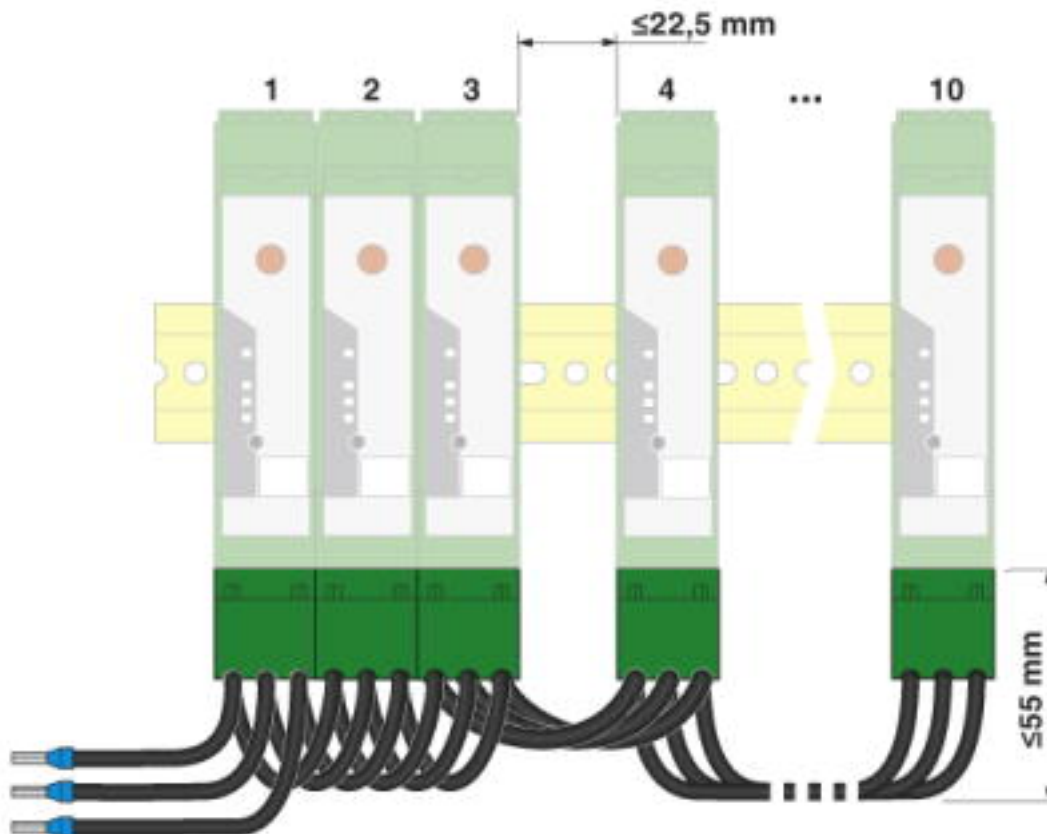


Figure shows the version BRIDGE- 4

# Jumper - BRIDGE-10-3M - 2901702

## Classifications

### eCl@ss

eCl@ss 10.0.1	27371392
eCl@ss 4.0	27378000
eCl@ss 4.1	27378000
eCl@ss 5.0	27379100
eCl@ss 5.1	27379100
eCl@ss 6.0	27379200
eCl@ss 7.0	27379201
eCl@ss 8.0	27379201
eCl@ss 9.0	27379201

### ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498
ETIM 6.0	EC002498
ETIM 7.0	EC002498

### UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121426

## Approvals

### Approvals

#### Approvals

EAC / UL Listed / cUL Listed / UL Listed / cUL Listed


#### Ex Approvals


### Approval details


EAC		RU C- DE.A*30.B.01742
-----	--	--------------------------


## Jumper - BRIDGE-10-3M - 2901702

### Approvals

UL Listed		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 228652
-----------	---	---	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 228652
------------	---	---	---------------

UL Listed		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 172140
-----------	---	---	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 172140
------------	---	---	---------------

### Accessories

#### Additional products

Covering hood - BRIDGE COVER - 2906240



The BRIDGE COVER covering hood is used to cover unused plugs on the CONTACTRON bridge that may subsequently be used to extend the system. The hood can be used with the screw and Push-in version of the bridge.