THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

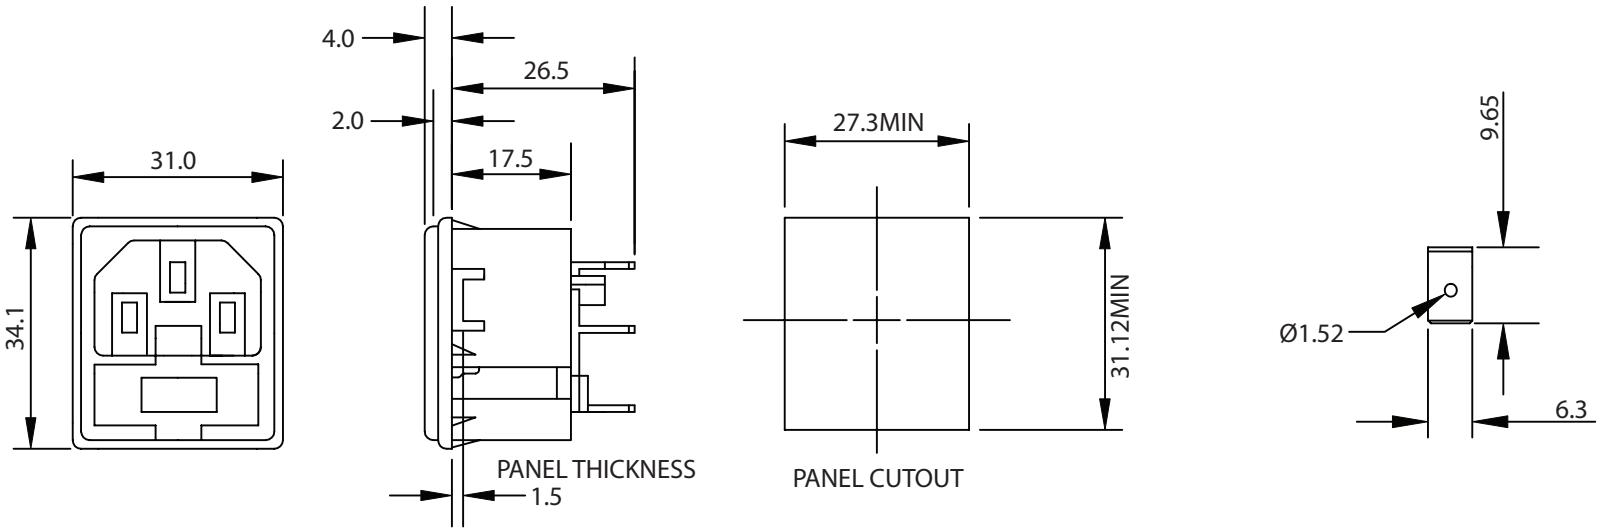

NOTES:

MAX RATING: 10A 250V AC
CONTACT RESISTANCE: <10 m OHM 9<15 OHM INCLUDING FUSEHOLDER
INSULATION RESISTANCE: $>10^3$ M OHM
A.C. BREAKDOWN: POLE-POLE 5.5kV.
POLES-PANEL 4.0kV
OPERATING TEMPERATURE: -40 ˚C TO 70 ˚C
MAX. PIN TEMPERATURE: +65 ˚C
MATERIALS: NYLON, FLAMMABILITY RATING UL 94 V-0
CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED

DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE
FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm

RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 723-15/63 RoHS Compliant

Description: SNAP-IN INLET WITH FUSEHOLDER

	UNIT: mm	REV. B
Drawn / Date	Checked / Date	Approved / Date
B.Zhang 01-22-03	01-22-03	JJH / 01-22-03