


TYPICAL APPLICATION

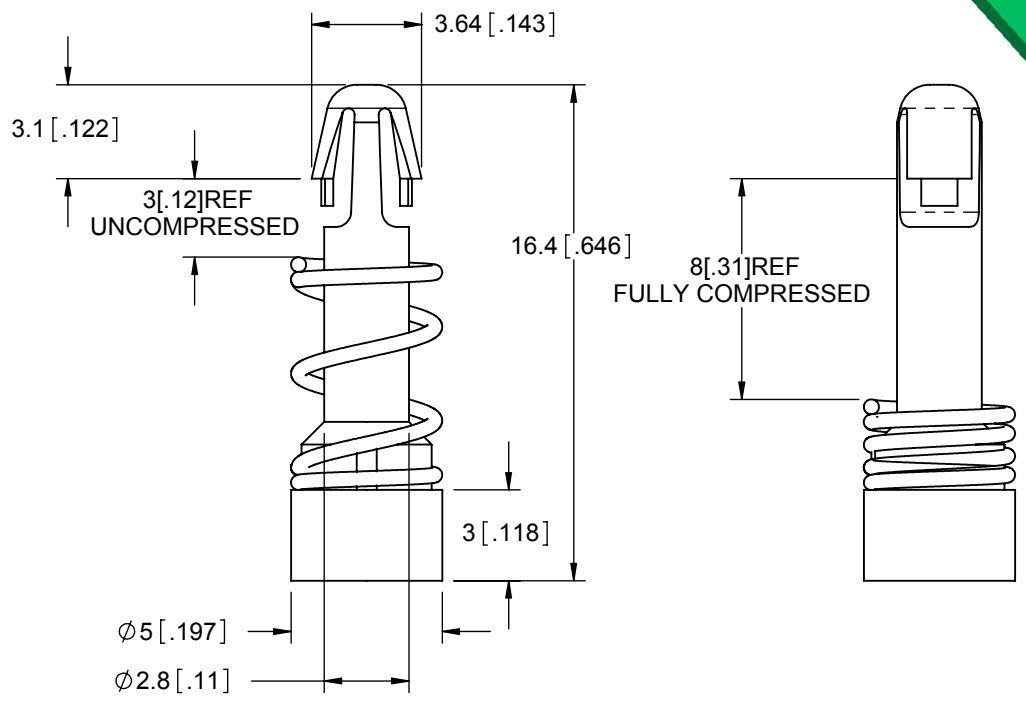

- NOTES:
1. MATERIAL: NYLON 6/6 UL 94 V-2 RMS-047, COLOR: NATURAL
 2. SPRING MATERIAL: STEEL, RMS-326, CHROME PLATED (RMS-355).
 3. DESIGNED TO SNAP LOCK INTO A $\phi 3.00 \pm 0.08$ [$\phi .118 \pm .003$] HOLE
 4. INSERTS THROUGH A 3.18-4.00 [$\phi .125$ -.157] HOLE IN HEATSINK
 5. PART IS DESIGNED IN MILLIMETERS.
INCH CONVERSIONS ARE PROVIDED FOR REF ONLY

TITLE: HEAT SINK SPRING MOUNT RIVET					DWG IN mm[IN]		
E	SEE CO 200099 FOR CHANGES	SK 01/07/08	CREATED USING SOLIDWORKS	FILE #: HSR-1	DWN: D.J.Z.	APP: D.J.Z.	FINAL
D	SEE ECN #1205 FOR CHANGES	SJ 08/03/06	TOLERANCES UNLESS NOTED =±.25 ANG.=±1°	SHEET: 1 OF 1	SHEET SIZE: A	DT: 08/27/2004	CHKD: S.J.
C	SEE ECN #937 FOR CHANGES	SK 02/08/05		RE: RICHCO INC.	RICHCO, INC.		PART #
B	SEE ECN #922 FOR CHANGES	SK 01/25/05				ENG@RICHCO-INC.COM	HSR-1 CA
A	RELEASED FOR PRODUCTION	SM 10/19/04		--		(773) 539-4060	
REV.	DESCRIPTION	ENGR. DATE					