



| REV. Status | TCA NO. | MODEL NO. | RATED CURRENT (ADC) | INDUCTANCE (uH)±20% | DCR (mohm MAX) | OD | HT |
|-----------------------|---------------|-----------|---------------------|---------------------|----------------|----------|----------|
| ISSUE 1 9/12/95 TS | P-A3-11401-01 | SKC-301 | 15 | 30 | 4.5 | 37(1.46) | 20(0.79) |
| | P-A3-11401-02 | SKC-302 | 15 | 50 | 6.5 | 39(1.54) | 21(0.83) |
| | P-A3-11401-03 | SKC-303 | 15 | 100 | 6.0 | 54(2.13) | 25(0.98) |
| | P-A3-11401-04 | SKC-304 | 15 | 150 | 9.5 | 55(2.17) | 26(1.02) |
| | P-A3-11401-05 | SKC-305 | 15 | 200 | 12.0 | 55(2.17) | 26(1.02) |

SKC-301~305



Schematic Diagram;



Country of origin

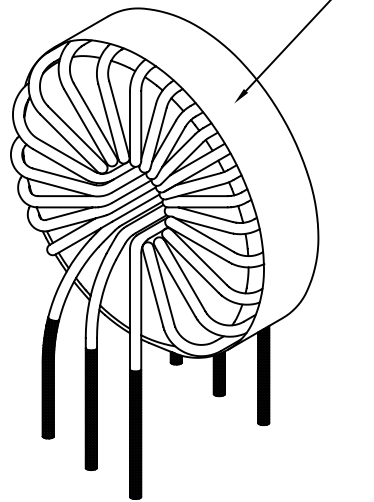

Mechanical Specifications;

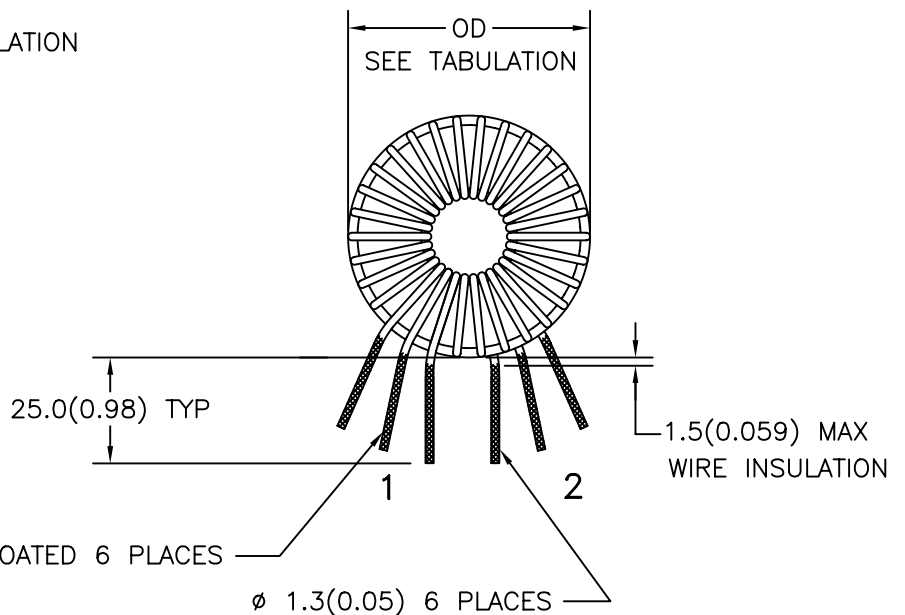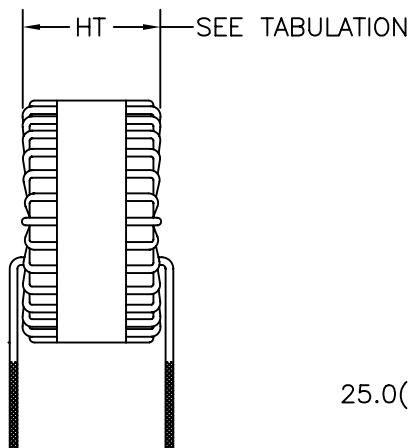

SOLDER COATED 6 PLACES

∅ 1.3(0.05) 6 PLACES

PREPARED BY:

K. Brennan

NOTE: Inductance is measured at 1 KHz, 1 Vrms with specified DC current

ENGINEER:

T. Shiozawa

DWG CONTROL NO.
P-A3-11401
ACAD\MISCX\A3114011.DWG

REV
—

POWER INDUCTOR FOR
SWITCH MODE POWER SUPPLIES

SKC-301~305

QUALITY CONTROL:

V. Casey

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA

43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

APPROVED:

V. Casey

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.