


## Flame-retardant PVC offers the protection you need.

### Solid wall duct – PVC


- Engineered to restrict wire access
- Constructed of flame-retardant PVC
- Improved flush sidewall and cover style for greater wire capacity
- Versatile North American and DIN standard mounting holes enable use of the same duct for multiple applications
- Base score line
- Lead-free construction

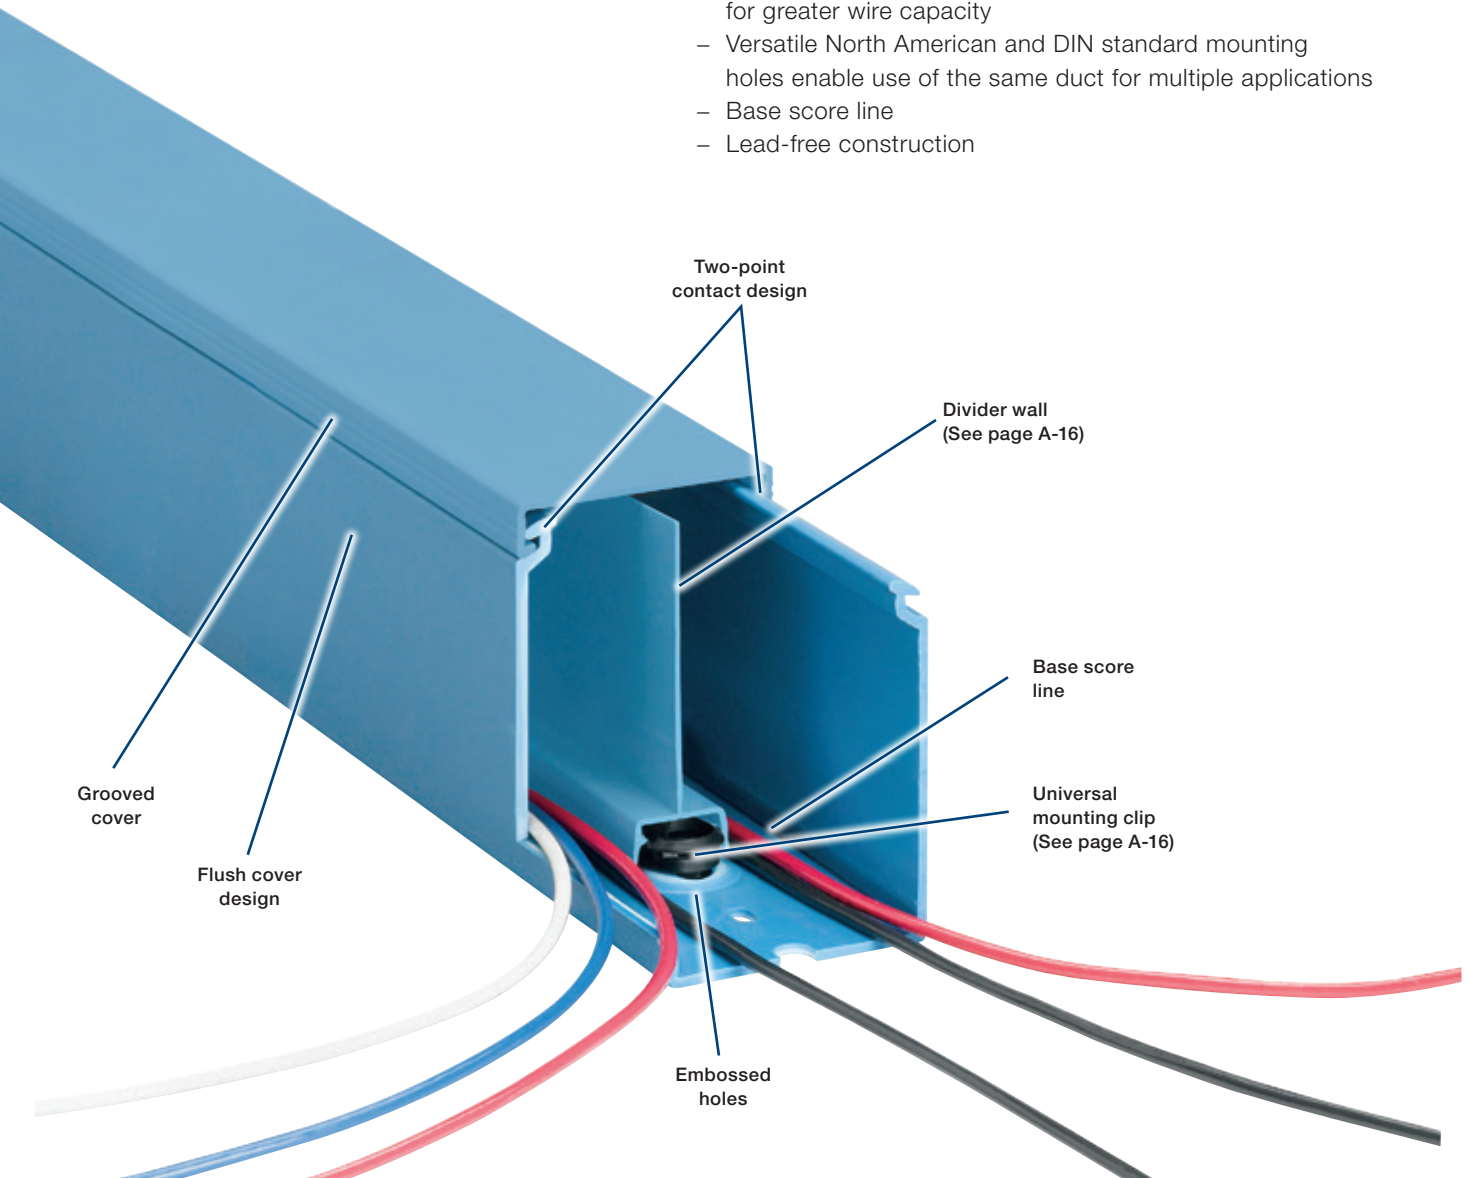


For a complete listing of solid wall dimensional details, see page B-4.



A

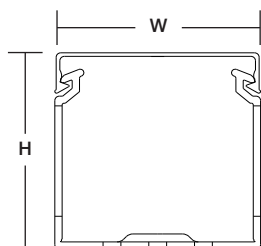


Front view with cover

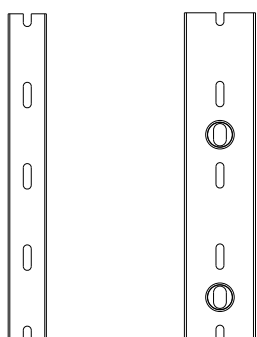

Pattern for 3/4" & 1"

Pattern for 1-1/2"

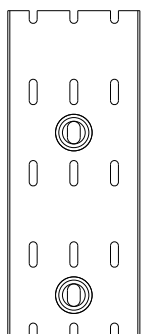

Pattern for 2", 2-1/2", 3", 4" & 6"


Bottom view

Cat. no.	Description (in.)	Size (W x H)		Cover cat. no.	Duct std. ctn. qty.	Cover std. ctn. qty.	Length (ft.)
		In.	mm				
TYD75X1SP[ _ ]6	0.75 x 1 Solid wall duct	0.94 x 1.14	23.9 x 27.7	TYD75CP[ _ ]6	120	120	6
TYD75X15SP[ _ ]6	0.75 x 1.5 Solid wall duct	0.94 x 1.60	23.9 x 39.6				
TYD75X2SP[ _ ]6	0.75 x 2 Solid wall duct	0.94 x 2.10	23.9 x 52.6				
TYD1X1SP[ _ ]6	1 x 1 Solid wall duct	1.25 x 1.14	31.8 x 27.7	TYD1CP[ _ ]6	120	120	6
TYD1X15SP[ _ ]6	1 x 1.5 Solid wall duct	1.25 x 1.60	31.8 x 39.9				
TYD1X2SP[ _ ]6	1 x 2 Solid wall duct	1.25 x 2.10	31.8 x 52.8				
TYD1X3SP[ _ ]6	1 x 3 Solid wall duct	1.25 x 3.05	31.8 x 77.7				
TYD1X4SP[ _ ]6	1 x 4 Solid wall duct	1.25 x 4.37	31.8 x 111.3		60		
TYD15X1SP[ _ ]6	1.5 x 1 Solid wall duct	1.75 x 1.14	44.5 x 27.7	TYD15CP[ _ ]6	120	120	6
TYD15X15SP[ _ ]6	1.5 x 1.5 Solid wall duct	1.75 x 1.60	44.5 x 39.9				
TYD15X2SP[ _ ]6	1.5 x 2 Solid wall duct	1.75 x 2.10	44.5 x 52.8				
TYD15X3SP[ _ ]6	1.5 x 3 Solid wall duct	1.75 x 3.05	44.5 x 77.7				
TYD15X4SP[ _ ]6	1.5 x 4 Solid wall duct	1.75 x 4.37	44.5 x 111.3		60		
TYD2X1SP[ _ ]6	2 x 1 Solid wall duct	2.25 x 1.24	57.2 x 28.4	TYD2CP[ _ ]6	120	120	6
TYD2X15SP[ _ ]6	2 x 1.5 Solid wall duct	2.25 x 1.70	57.2 x 40.4				
TYD2X2SP[ _ ]6	2 x 2 Solid wall duct	2.25 x 2.19	57.2 x 53.3				
TYD2X3SP[ _ ]6	2 x 3 Solid wall duct	2.25 x 3.14	57.2 x 78.2				
TYD2X4SP[ _ ]6	2 x 4 Solid wall duct	2.25 x 4.46	57.2 x 111.8		60		
TYD2X5SP[ _ ]6	2 x 5 Solid wall duct	2.25 x 5.15	57.2 x 129.3				
TYD25X2SP[ _ ]6	2.5 x 2 Solid wall duct	2.75 x 2.19	69.9 x 53.6	TYD25CP[ _ ]6	120	120	6
TYD25X3SP[ _ ]6	2.5 x 3 Solid wall duct	2.75 x 3.14	69.9 x 78.2				
TYD25X4SP[ _ ]6	2.5 x 4 Solid wall duct	2.75 x 4.46	69.9 x 111.8				
TYD3X1SP[ _ ]6	3 x 1 Solid wall duct	3.25 x 1.24	82.6 x 29.0	TYD3CP[ _ ]6	120	120	6
TYD3X2SP[ _ ]6	3 x 2 Solid wall duct	3.25 x 2.19	82.6 x 54.9				
TYD3X3SP[ _ ]6	3 x 3 Solid wall duct	3.25 x 3.14	82.6 x 79.8				
TYD3X4SP[ _ ]6	3 x 4 Solid wall duct	3.25 x 4.46	82.6 x 113.5				
TYD3X5SP[ _ ]6	3 x 5 Solid wall duct	3.25 x 5.15	82.6 x 130.6				
TYD4X15SP[ _ ]6	4 x 1.5 Solid wall duct	4.25 x 1.70	108.0 x 42.4	TYD4CP[ _ ]6	60	120	6
TYD4X2SP[ _ ]6	4 x 2 Solid wall duct	4.25 x 2.19	108.0 x 55.1				
TYD4X3SP[ _ ]6	4 x 3 Solid wall duct	4.25 x 3.14	108.0 x 80.0				
TYD4X4SP[ _ ]6	4 x 4 Solid wall duct	4.25 x 4.46	108.0 x 113.8				
TYD4X5SP[ _ ]6	4 x 5 Solid wall duct	4.25 x 5.15	108.0 x 130.8		30		
TYD6X4SP[ _ ]6	6 x 4 Solid wall duct	6.25 x 4.46	158.8 x 114.0	TYD6CP[ _ ]6	30	60	6

[ ] = space for colour identifier:

- G = Grey
- W = White
- B = Black
- I = Intrinsic blue

- Standard lengths are 6 feet.
- + Catalogue number must be completed by adding suffix G for grey, W for white, I for intrinsic blue, B for black.
- Example: TYD75X1SPG6 is a 0.75" x 1" solid wall grey duct.
- To order duct without mounting holes, add suffix NM to catalogue number.
- Example: TYD75X1SPG6NM is a 0.75" x 1" solid wall grey duct with no mounting holes.
- To order adhesive-backed duct, add suffix A to catalogue number.
- Example: TYD75X1SPG6A is a 0.75" x 1" solid wall grey duct with adhesive backing. Shelf life for adhesive is 1 year.
- PVC vinyl duct is CSA certified, UL® Recognized and CE compliant.




Side view

# Wide slot wiring duct

## A Greater sidewall rigidity with increased versatility.

### Wide slot wiring duct – PVC





- Wide fingers and slots increase rigidity and enable easier insertion of wiring bundles
- Non-slip cover does not slide easily and resists vibration
- Rounded edges keep hands and wires free of abrasion
- V-shaped slot lead-in enables easier and faster wire installation
- Dual score lines are designed to yield clean breakoffs at the base of the slot and the duct
- Restricted slot design ensures that wires are held with or without the cover inserted
- Cover attaches flush with sidewall for finished look
- Improved flush sidewall and cover style for greater wire capacity
- Versatile North American and DIN standard mounting holes enable use of the same duct for multiple applications
- Constructed of flame-retardant PVC
- Integrated mounting holes — larger sizes include staggered holes for mounting flexibility (see page B-5 for illustration)
- Lead-free construction

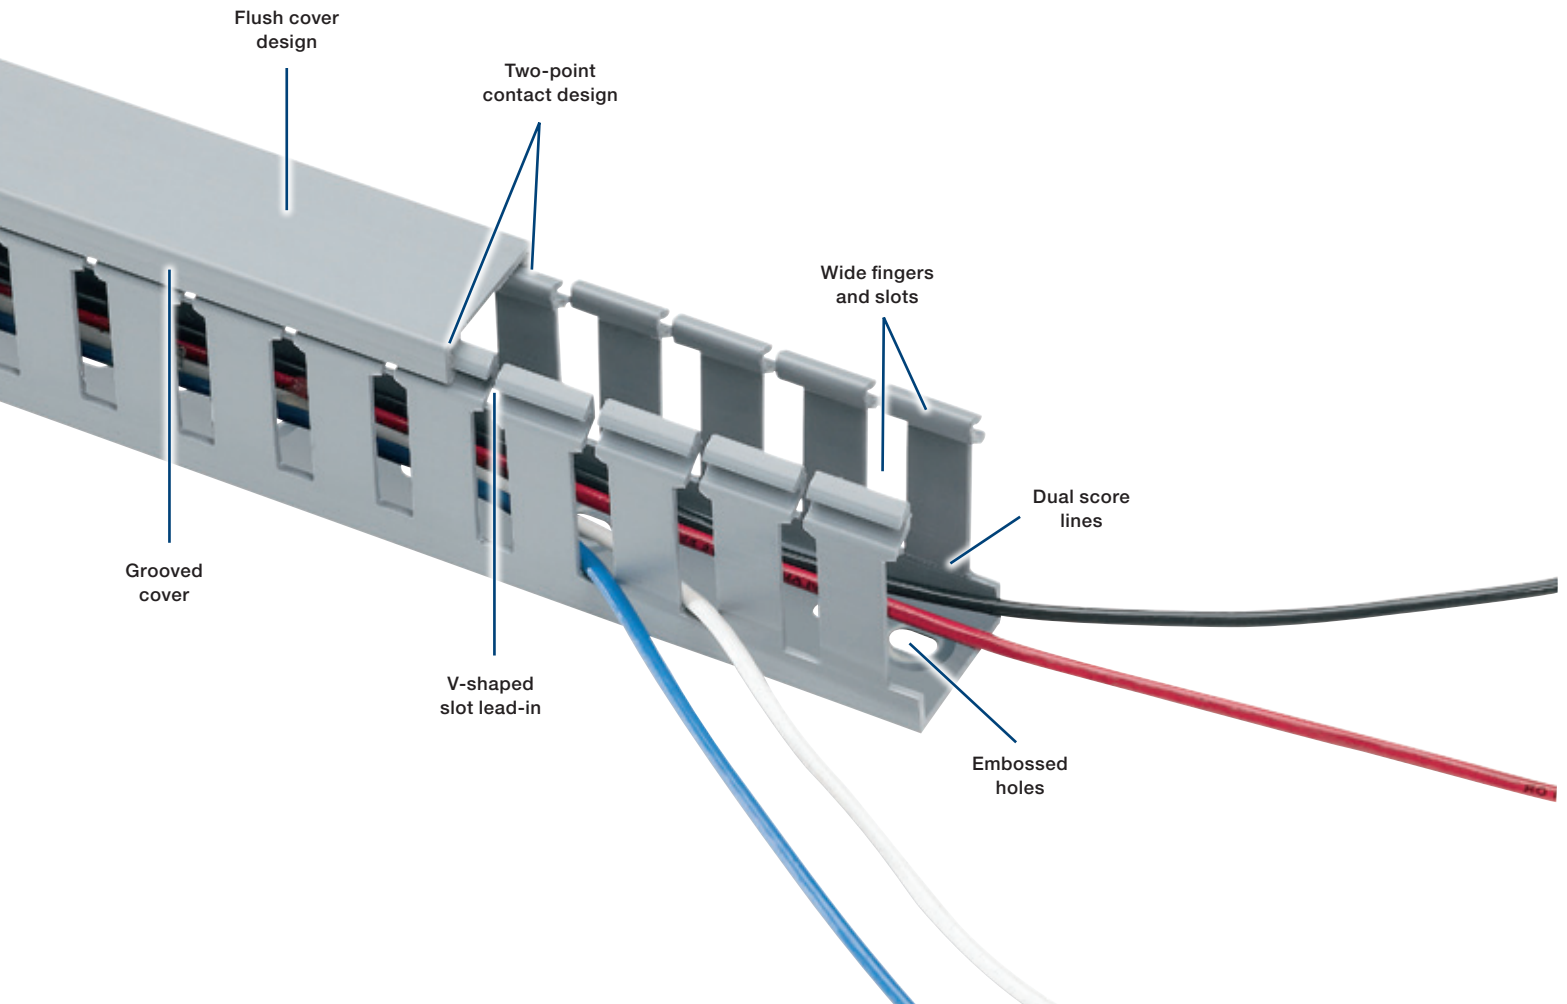

For a complete listing of wide slot dimensional details, see page B-5.



A

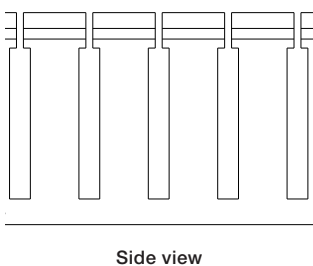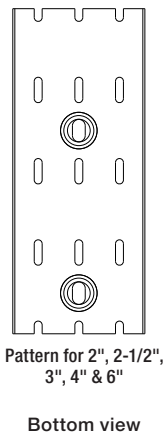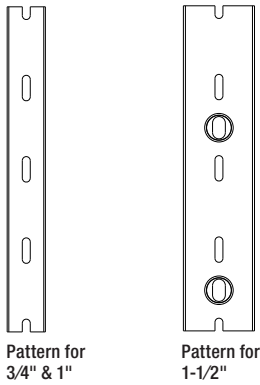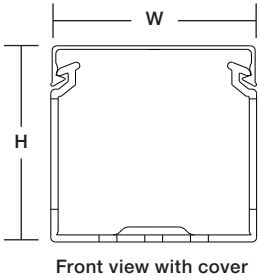

Cat. no.	Description (in.)	Size (W x H)		Cover cat. no.	Duct std. ctn. qty.	Cover std. ctn. qty.	Length (ft.)	
		In.	mm					
TYD75X1WP[ _ ]6	0.75 x 1 Wide slot duct	0.94 x 1.14	23.9 x 27.7	TYD75CP[ _ ]6	120	120	6	
TYD75X15WP[ _ ]6	0.75 x 1.5 Wide slot duct	0.94 x 1.60	23.9 x 39.6					
TYD75X2WP[ _ ]6	0.75 x 2 Wide slot duct	0.94 x 2.10	23.9 x 52.6					
TYD1X1WP[ _ ]6	1 x 1 Wide slot duct	1.25 x 1.14	31.8 x 27.7	TYD1CP[ _ ]6	120	120	6	
TYD1X15WP[ _ ]6	1 x 1.5 Wide slot duct	1.25 x 1.60	31.8 x 39.9					
TYD1X2WP[ _ ]6	1 x 2 Wide slot duct	1.25 x 2.10	31.8 x 52.8					
TYD1X3WP[ _ ]6	1 x 3 Wide slot duct	1.25 x 3.05	31.8 x 77.7					
TYD1X4WP[ _ ]6	1 x 4 Wide slot duct	1.25 x 4.37	31.8 x 111.3	TYD15CP[ _ ]6	60	120	6	
TYD15X1WP[ _ ]6	1.5 x 1 Wide slot duct	1.75 x 1.14	44.5 x 27.7					
TYD15X15WP[ _ ]6	1.5 x 1.5 Wide slot duct	1.75 x 1.60	44.5 x 39.9					
TYD15X2WP[ _ ]6	1.5 x 2 Wide slot duct	1.75 x 2.10	44.5 x 52.8					
TYD15X3WP[ _ ]6	1.5 x 3 Wide slot duct	1.75 x 3.05	44.5 x 77.7					
TYD15X4WP[ _ ]6	1.5 x 4 Wide slot duct	1.75 x 4.37	44.5 x 111.3	60	TYD2CP[ _ ]6	120	120	6
TYD2X1WP[ _ ]6	2 x 1 Wide slot duct	2.25 x 1.24	57.2 x 28.4					
TYD2X15WP[ _ ]6	2 x 1.5 Wide slot duct	2.25 x 1.70	57.2 x 40.4					
TYD2X2WP[ _ ]6	2 x 2 Wide slot duct	2.25 x 2.19	57.2 x 53.3					
TYD2X3WP[ _ ]6	2 x 3 Wide slot duct	2.25 x 3.14	57.2 x 78.2	60	TYD25CP[ _ ]6	120	120	6
TYD2X4WP[ _ ]6	2 x 4 Wide slot duct	2.25 x 4.46	57.2 x 111.8					
TYD2X5WP[ _ ]6	2 x 5 Wide slot duct	2.25 x 5.15	57.2 x 129.3					
TYD25X2WP[ _ ]6	2.5 x 2 Wide slot duct	2.75 x 2.19	69.9 x 53.6					
TYD25X3WP[ _ ]6	2.5 x 3 Wide slot duct	2.75 x 3.14	69.9 x 78.2					
TYD25X4WP[ _ ]6	2.5 x 4 Wide slot duct	2.75 x 4.46	69.9 x 111.8	60	TYD3CP[ _ ]6	120	120	6
TYD3X1WP[ _ ]6	3 x 1 Wide slot duct	3.25 x 1.24	82.6 x 29.0					
TYD3X2WP[ _ ]6	3 x 2 Wide slot duct	3.25 x 2.19	82.6 x 54.9					
TYD3X3WP[ _ ]6	3 x 3 Wide slot duct	3.25 x 3.14	82.6 x 79.8					
TYD3X4WP[ _ ]6	3 x 4 Wide slot duct	3.25 x 4.46	82.6 x 113.5	TYD3X5WP[ _ ]6	60	120	6	
TYD3X5WP[ _ ]6	3 x 5 Wide slot duct	3.25 x 5.15	82.6 x 130.6					
TYD4X15WP[ _ ]6	4 x 1.5 Wide slot duct	4.25 x 1.70	108.0 x 42.4					
TYD4X2WP[ _ ]6	4 x 2 Wide slot duct	4.25 x 2.19	108.0 x 55.1	TYD4CP[ _ ]6	60	120	6	
TYD4X3WP[ _ ]6	4 x 3 Wide slot duct	4.25 x 3.14	108.0 x 80.0					
TYD4X4WP[ _ ]6	4 x 4 Wide slot duct	4.25 x 4.46	108.0 x 113.8					
TYD4X5WP[ _ ]6	4 x 5 Wide slot duct	4.25 x 5.15	108.0 x 130.8					
TYD6X4WP[ _ ]6	6 x 4 Wide slot duct	6.25 x 4.46	158.8 x 114.0	30	TYD6CP[ _ ]6	30	60	6

= space for colour identifier:

- G = Grey
- W = White
- B = Black
- I = Intrinsic blue

- Standard lengths are 6 feet.
- + Catalogue number must be completed by adding suffix G for grey, W for white, I for intrinsic blue, B for black.
- Example: TYD75X1WPG6 is a 0.75" x 1" wide slot grey duct.
- To order duct without mounting holes, add suffix NM to catalogue number.
- Example: TYD75X1WPG6NM is a 0.75" x 1" wide slot grey duct with no mounting holes.
- To order adhesive-backed duct, add suffix A to Catalogue Number.
- Example: TYD75X1WPG6A is a 0.75" x 1" wide slot grey duct with adhesive backing. Shelf life for adhesive is 1 year.
- PVC vinyl duct is CSA certified, UL® Recognized and CE compliant.


# Narrow slot wiring duct

A

## Designed to fit the spacing of high-density terminal blocks.

### Narrow slot wiring duct – PVC


- Higher number of smaller fingers for more concise harnessing
- Non-slip cover does not slide easily and resists vibration
- Rounded edges protect hands and wires
- V-shaped slot lead-in enables easier and faster wire installation
- Restricted slot design makes sure that wires are held with or without the cover inserted
- Cover attaches flush with sidewall for finished look
- Versatile North American and DIN standard mounting holes enable use of the same duct for multiple applications
- Dual score lines are designed to yield clean breakoffs at the base of the slot and the duct
- Finger design restricts wire from slipping along the edge; creates two or three levels of wire service (see page B-6 for illustration)
- Lead-free construction
- Constructed of flame-retardant PVC

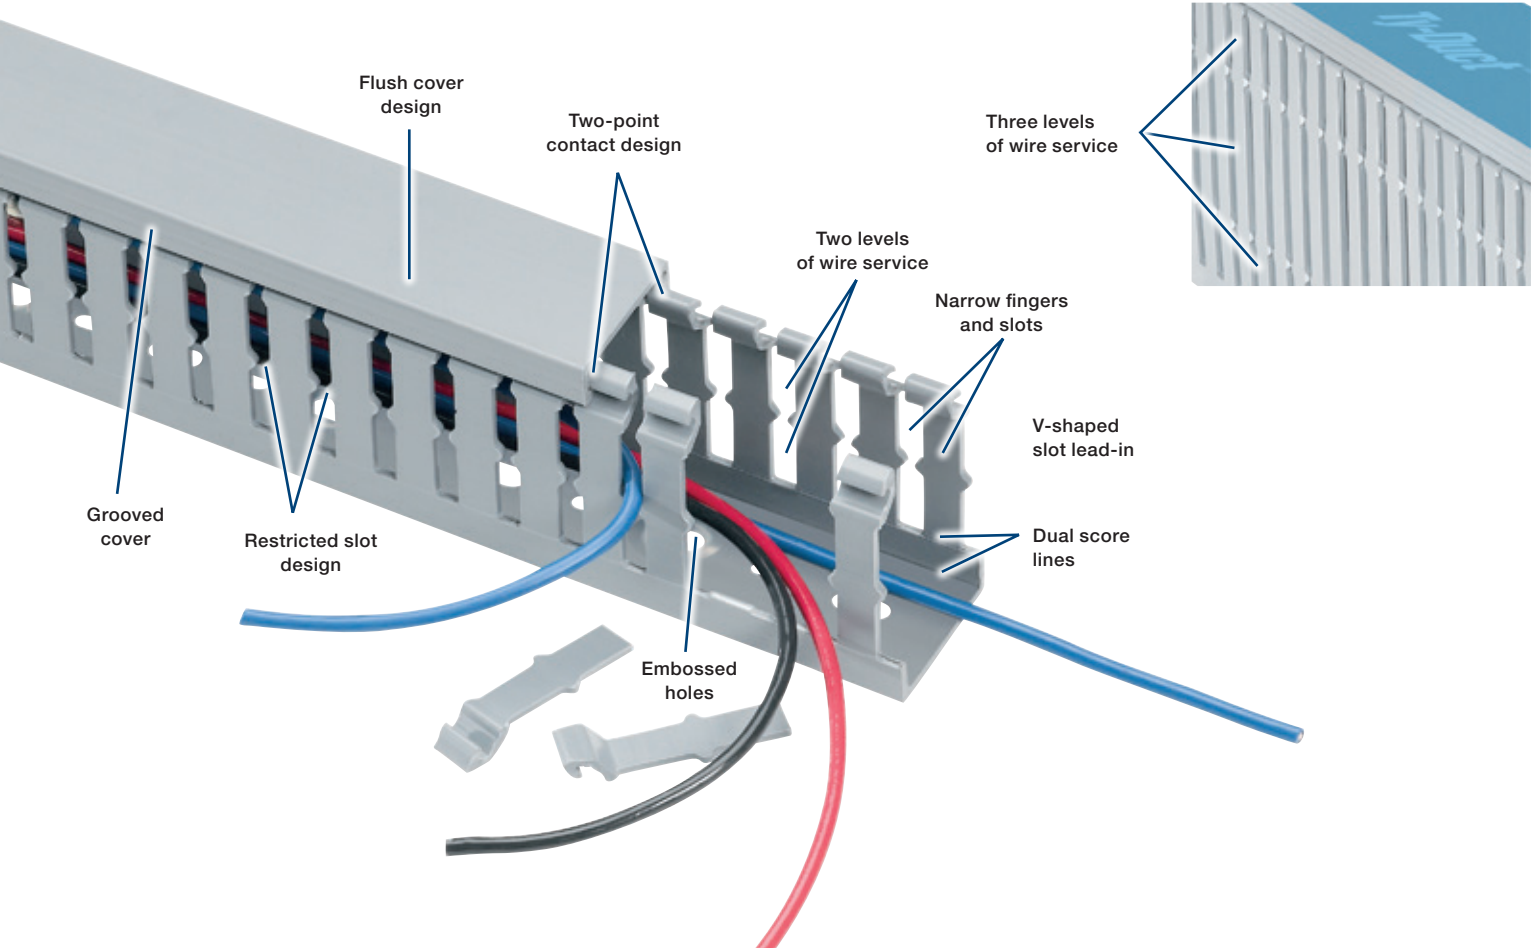


For a complete listing of narrow slot dimensional details, see page B-6.



A

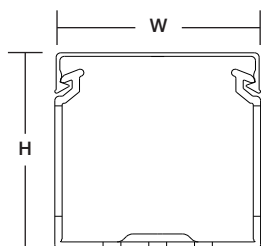


Front view with cover

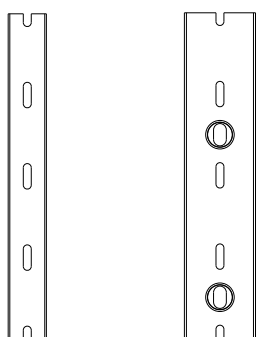


Pattern for 3/4" & 1"

Pattern for 1-1/2"

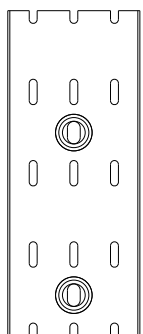

Pattern for 2", 2-1/2", 3", 4" & 6"

Bottom view

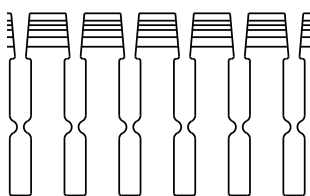

Side view

Cat. no.	Description (in.)	Size (W x H)		Cover cat. no.	Duct std. ctn. qty.	Cover std. ctn. qty.	Length (ft.)
		In.	mm				
TYD75X15NP[ _ ]6	0.75 x 1.5 Narrow slot duct	0.94 x 1.60	23.9 x 39.6	TYD75CP[ _ ]6	120	120	6
TYD1X1NP[ _ ]6	1 x 1 Narrow slot duct	1.25 x 1.14	31.8 x 27.7	TYD1CP[ _ ]6	120	120	6
TYD1X15NP[ _ ]6	1 x 1.5 Narrow slot duct	1.25 x 1.60	31.8 x 39.9				
TYD1X2NP[ _ ]6	1 x 2 Narrow slot duct	1.25 x 2.10	31.8 x 52.8				
TYD1X3NP[ _ ]6	1 x 3 Narrow slot duct	1.25 x 3.05	31.8 x 77.7				
TYD1X4NP[ _ ]6	1 x 4 Narrow slot duct	1.25 x 4.37	31.8 x 111.3		60		
TYD15X1NP[ _ ]6	1.5 x 1 Narrow slot duct	1.75 x 1.14	44.5 x 27.7	TYD15CP[ _ ]6	120	120	6
TYD15X15NP[ _ ]6	1.5 x 1.5 Narrow slot duct	1.75 x 1.60	44.5 x 39.9				
TYD15X2NP[ _ ]6	1.5 x 2 Narrow slot duct	1.75 x 2.10	44.5 x 52.8				
TYD15X3NP[ _ ]6	1.5 x 3 Narrow slot duct	1.75 x 3.05	44.5 x 77.7				
TYD15X4NP[ _ ]6	1.5 x 4 Narrow slot duct	1.75 x 4.37	44.5 x 111.3		60		
TYD2X1NP[ _ ]6	2 x 1 Narrow slot duct	2.25 x 1.24	57.2 x 28.4	TYD2CP[ _ ]6	120	120	6
TYD2X15NP[ _ ]6	2 x 1.5 Narrow slot duct	2.25 x 1.70	57.2 x 40.4				
TYD2X2NP[ _ ]6	2 x 2 Narrow slot duct	2.25 x 2.19	57.2 x 53.3				
TYD2X3NP[ _ ]6	2 x 3 Narrow slot duct	2.25 x 3.14	57.2 x 78.2		60		
TYD2X4NP[ _ ]6	2 x 4 Narrow slot duct	2.25 x 4.46	57.2 x 111.8				
TYD2X5NP[ _ ]6	2 x 5 Narrow slot duct	2.25 x 5.15	57.2 x 129.3				
TYD25X2NP[ _ ]6	2.5 x 2 Narrow slot duct	2.75 x 2.19	69.9 x 53.6	TYD25CP[ _ ]6	120	120	6
TYD25X3NP[ _ ]6	2.5 x 3 Narrow slot duct	2.75 x 3.14	69.9 x 78.2		60		
TYD25X4NP[ _ ]6	2.5 x 4 Narrow slot duct	2.75 x 4.46	69.9 x 111.8				
TYD3X1NP[ _ ]6	3 x 1 Narrow slot duct	3.25 x 1.24	82.6 x 29.0	TYD3CP[ _ ]6	120	120	6
TYD3X2NP[ _ ]6	3 x 2 Narrow slot duct	3.25 x 2.19	82.6 x 54.9		60		
TYD3X3NP[ _ ]6	3 x 3 Narrow slot duct	3.25 x 3.14	82.6 x 79.8				
TYD3X4NP[ _ ]6	3 x 4 Narrow slot duct	3.25 x 4.46	82.6 x 113.5				
TYD3X5NP[ _ ]6	3 x 5 Narrow slot duct	3.25 x 5.15	82.6 x 130.6				
TYD4X2NP[ _ ]6	4 x 2 Narrow slot duct	4.25 x 2.19	108.0 x 55.1	TYD4CP[ _ ]6	60	120	6
TYD4X3NP[ _ ]6	4 x 3 Narrow slot duct	4.25 x 3.14	108.0 x 80.0				
TYD4X4NP[ _ ]6	4 x 4 Narrow slot duct	4.25 x 4.46	108.0 x 113.8		30		
TYD4X5NP[ _ ]6	4 x 5 Narrow slot duct	4.25 x 5.15	108.0 x 130.8				

[ ] = space for colour identifier:

- G = Grey
- W = White
- B = Black
- I = Intrinsic blue


- Standard lengths are 6 feet.
- + Catalogue number must be completed by adding suffix G for grey, W for white, I for intrinsic blue, B for black.
- Example: TYD75X15NPG6 is a 0.75" x 1.5" narrow slot grey duct.
- To order duct without mounting holes, add suffix NM to catalogue number.
- Example: TYD75X15NPG6NM is a 0.75" x 1.5" narrow slot grey duct with no mounting holes.
- To order adhesive-backed duct, add suffix A to Catalogue Number.
- Example: TYD75X15NPG6A is a 0.75" x 1.5" narrow slot grey duct with adhesive backing. Shelf life for adhesive is 1 year.
- PVC vinyl duct is CSA certified, UL® Recognized and CE compliant.

## Round hole wiring duct

# A Holes retain and support wires at different heights.

### Round hole wiring duct — PVC


- Multiple rows of holes retain wire at different heights and positions with or without the cover
- Features maximum number of wire holes
- Greater wall rigidity than open slot duct
- Non-slip cover does not slide easily and resists vibration
- Rounded edges protect hands and wires
- Base score line enables sidewall section to be removed
- Cover attaches flush with sidewall for finished look
- Constructed of flame-retardant PVC
- Integrated mounting holes — larger sizes include staggered holes for mounting flexibility (see page B-7 for illustration)
- Lead-free construction

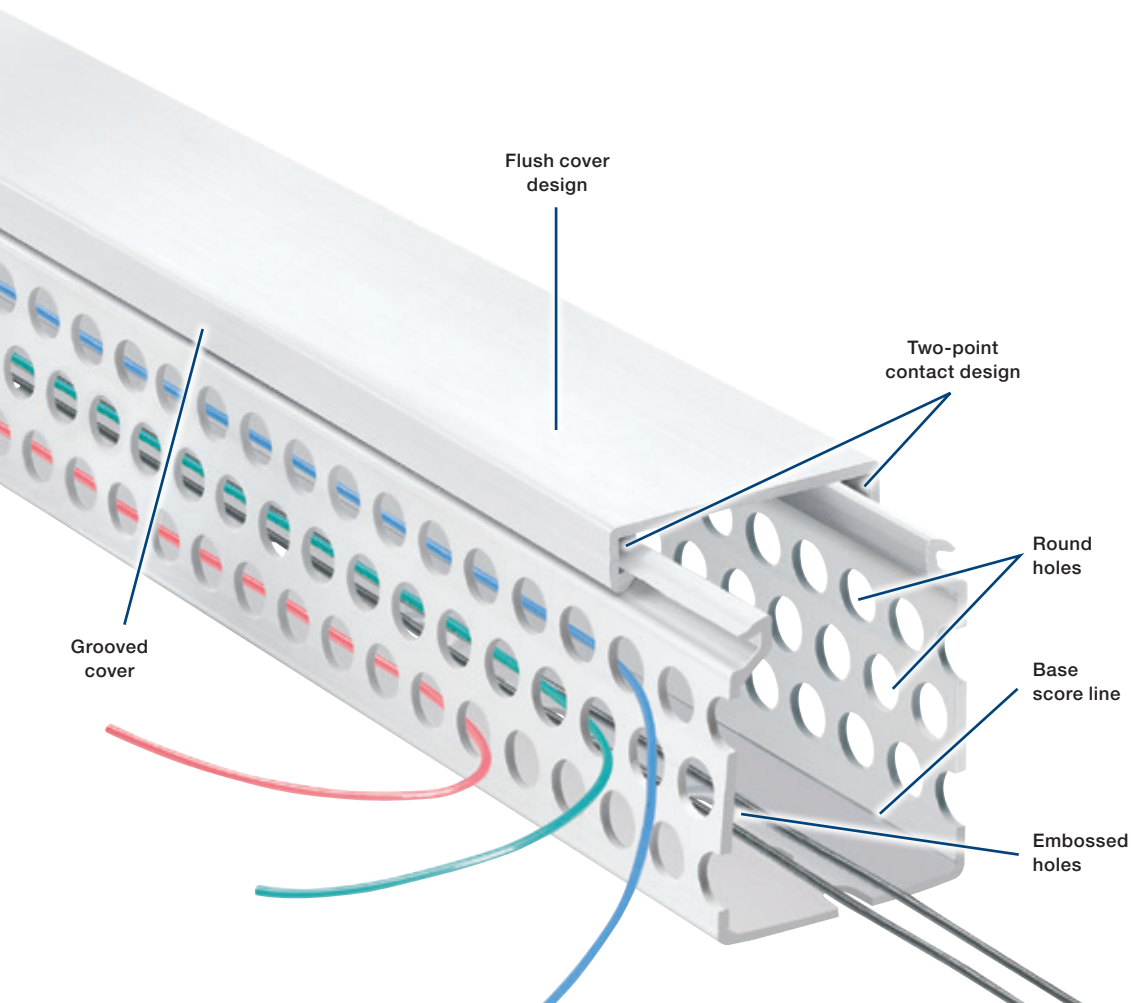


For a complete listing of round hole dimensional details, see page B-7.



A

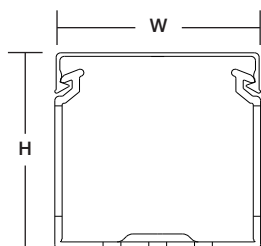


Front view with cover

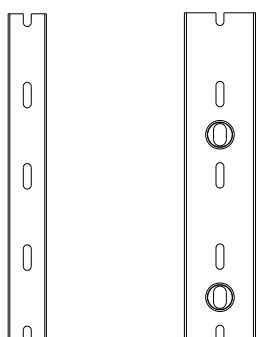

Pattern for 3/4" & 1"


Pattern for 1-1/2"

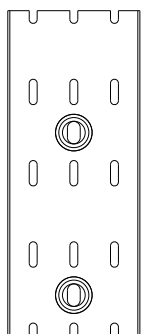

Pattern for 2", 2-1/2", 3", 4" & 6"

Bottom view

Cat. no.	Description (in.)	Size (W x H)		Cover cat. no.	Duct std. ctn. qty.	Cover std. ctn. qty.	Length (ft.)
		In.	mm				
TYD1X15RP[ _ ]6	1 x 1.5 Round hole duct	1.75 x 1.60	44.5 x 39.9	TYD1CP[ _ ]6	120	120	6
TYD1X2RP[ _ ]6	1 x 2 Round hole duct	1.25 x 2.10	31.8 x 52.8				
TYD1X3RP[ _ ]6	1 x 3 Round hole duct	1.25 x 3.05	31.8 x 77.7				
TYD1X4RP[ _ ]6	1 x 4 Round hole duct	1.25 x 4.37	31.8 x 111.3				
TYD15X15RP[ _ ]6	1.5 x 1.5 Round hole duct	1.75 x 1.60	44.5 x 39.9	TYD15CP[ _ ]6	120	120	6
TYD15X2RP[ _ ]6	1.5 x 2 Round hole duct	1.75 x 2.10	44.5 x 52.8				
TYD15X3RP[ _ ]6	1.5 x 3 Round hole duct	1.75 x 3.05	44.5 x 77.7				
TYD15X4RP[ _ ]6	1.5 x 4 Round hole duct	1.75 x 4.37	44.5 x 111.3				
TYD2X15RP[ _ ]6	2 x 1.5 Round hole duct	2.25 x 1.70	57.2 x 40.4	TYD2CP[ _ ]6	120	120	6
TYD2X2RP[ _ ]6	2 x 2 Round hole duct	2.25 x 2.19	57.2 x 53.3				
TYD2X3RP[ _ ]6	2 x 3 Round hole duct	2.25 x 3.14	57.2 x 78.2				
TYD2X4RP[ _ ]6	2 x 4 Round hole duct	2.25 x 4.46	57.2 x 111.8				
TYD3X2RP[ _ ]6	3 x 2 Round hole duct	3.25 x 2.19	82.6 x 54.9	TYD3CP[ _ ]6	60	120	6
TYD3X3RP[ _ ]6	3 x 3 Round hole duct	3.25 x 3.14	82.6 x 79.8				
TYD3X4RP[ _ ]6	3 x 4 Round hole duct	3.25 x 4.46	82.6 x 113.5	TYD4CP[ _ ]6	60	120	6
TYD4X15RP[ _ ]6	4 x 1.5 Round hole duct	4.25 x 1.70	108.0 x 42.4				
TYD4X2RP[ _ ]6	4 x 2 Round hole duct	4.25 x 2.19	108.0 x 55.1				
TYD4X3RP[ _ ]6	4 x 3 Round hole duct	4.25 x 3.14	108.0 x 80.0				
TYD4X4RP[ _ ]6	4 x 4 Round hole duct	4.25 x 4.46	108.0 x 113.8		30		

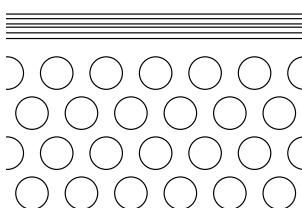

Side view

[ ] = space for colour identifier:

- G = Grey
- W = White
- B = Black
- I = Intrinsic blue

- Standard lengths are 6 feet.
- + Catalogue number must be completed by adding suffix G for grey, W for white, I for intrinsic blue, B for black.
- Example: TYD1X15RPG6 is a 1" x 1.5" round hole grey duct.
- To order duct without mounting holes, add suffix NM to catalogue number.
- Example: TYD1X15RPG6NM is a 1" x 1.5" round hole grey duct with no mounting holes.
- To order adhesive-backed duct, add suffix A to catalogue number.
- Example: TYD1X15RPG6A is a 1" x 1.5" round hole grey duct with adhesive backing.
- PVC vinyl duct is CSA certified, UL® Recognized and CE compliant.




# Metric wide and narrow slot wiring duct

A


## Lead-free thermoplastic duct

### With 8–12 / 4–6 mm slots


- Shock-resistant and self-extinguishing thermoplastic in conformity with UL94V-0 standard, resistant to abnormal heat and fire up to 960 °C (glow-wire test) in conformity with IEC 60695-2-1 standard
- Minimum storage/transport temperature -5 °C
- Minimum installation/use temperature -15 °C
- Maximum use temperature +60 °C
- Standard length 2 meters
- Colour RAL 7030 grey
- Conforms to EN 50085-2-3 standard
- Conforms to RoHS directive
- Lead-free
- Certifications: CSA – File no. 077988, IMQ, UL, RINA

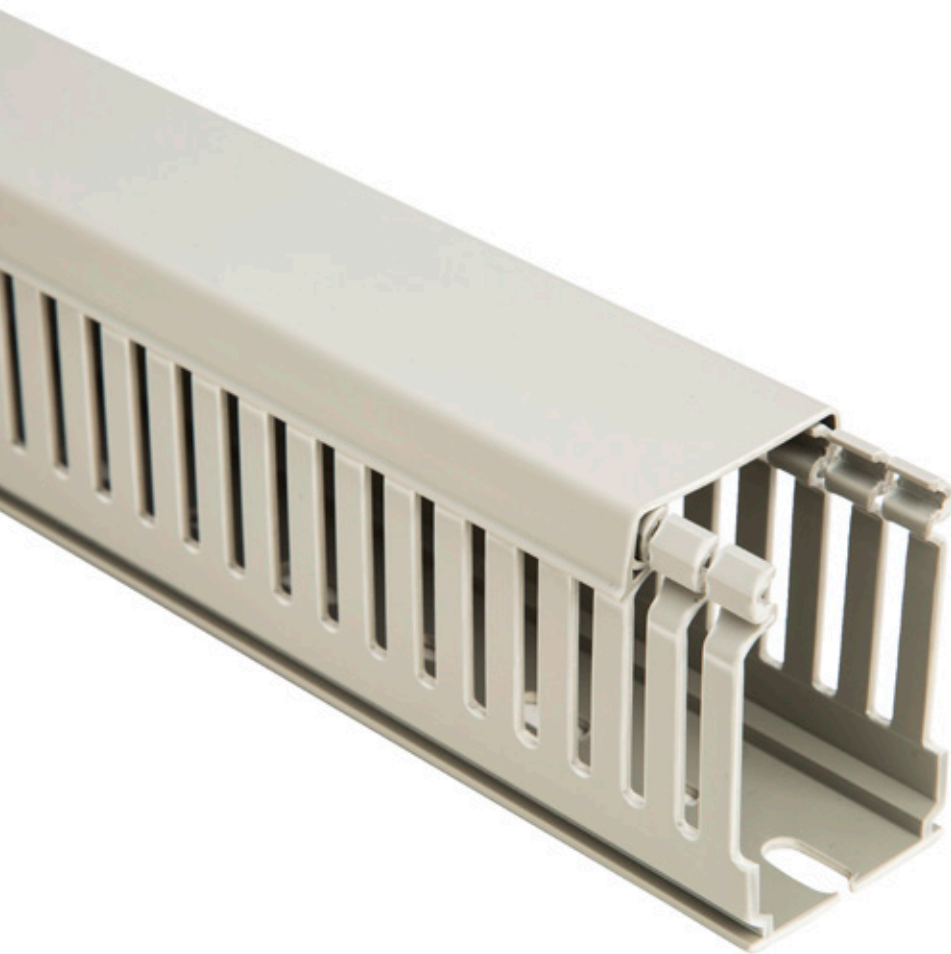


## Wide slot wiring duct

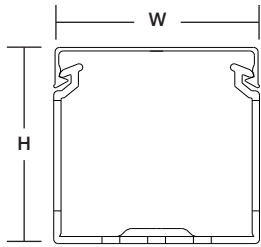

Front view with cover

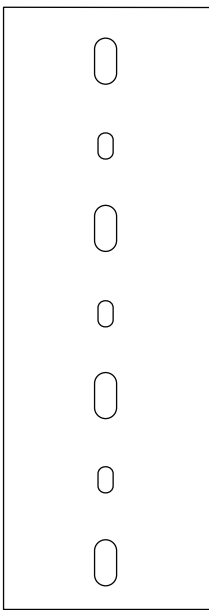

Bottom view

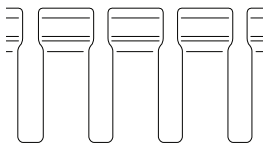


Side view

Cat. no.*	Description (mm)	Size (W x H)		Cover cat. no.*	Duct std. ctn. qty. (meters)	Length (meters)
		In.	mm			
05019	15 x 17 Grey wide finger wiring duct	.59 x .67	15 x 17	05300	46	2
05033	25 x 30 Grey wide finger wiring duct	.98 x 1.18	25 x 30	05302	58	2
05035	40 x 30 Grey wide finger wiring duct	1.57 x 1.18	40 x 30	05304	38	2
05037	60 x 30 Grey wide finger wiring duct	2.36 x 1.18	60 x 30	05306	52	2
05043	25 x 40 Grey wide finger wiring duct	0.98 x 1.57	25 x 40	05302	48	2
05045	40 x 40 Grey wide finger wiring duct	1.57 x 1.57	40 x 40	05304	30	2
05047	60 x 40 Grey wide finger wiring duct	2.36 x 1.57	60 x 40	05306	40	2
05049	80 x 40 Grey wide finger wiring duct	3.15 x 1.57	80 x 40	05308	32	2
05051	100 x 40 Grey wide finger wiring duct	3.94 x 1.57	100 x 40	05310	24	2
05053	120 x 40 Grey wide finger wiring duct	4.72 x 1.57	120 x 40	05312	20	2
05063	25 x 60 Grey wide finger wiring duct	0.98 x 2.36	25 x 60	05302	34	2
05065	40 x 60 Grey wide finger wiring duct	1.57 x 2.36	40 x 60	05304	22	2
05067	60 x 60 Grey wide finger wiring duct	2.36 x 2.36	60 x 60	05306	32	2
05069	80 x 60 Grey wide finger wiring duct	3.15 x 2.36	80 x 60	05308	24	2
05071	100 x 60 Grey wide finger wiring duct	3.94 x 2.36	100 x 60	05310	20	2
05073	120 x 60 Grey wide finger wiring duct	4.72 x 2.36	120 x 60	05312	14	2
05083	25 x 80 Grey wide finger wiring duct	0.98 x 3.15	25 x 80	05302	28	2
05085	40 x 80 Grey wide finger wiring duct	1.57 x 3.15	40 x 80	05304	36	2
05087	60 x 80 Grey wide finger wiring duct	2.36 x 3.15	60 x 80	05306	24	2
05089	80 x 80 Grey wide finger wiring duct	3.15 x 3.15	80 x 80	05308	16	2
05091	100 x 80 Grey wide finger wiring duct	3.94 x 3.15	100 x 80	05310	16	2
05093	120 x 80 Grey wide finger wiring duct	4.72 x 3.15	120 x 80	05312	12	2
05094	25 x 100 Grey wide finger wiring duct	0.98 x 3.94	25 x 100	05302	20	2
05095	40 x 100 Grey wide finger wiring duct	1.57 x 3.94	40 x 100	05304	28	2
05096	60 x 100 Grey wide finger wiring duct	2.36 x 3.94	60 x 100	05306	20	2
05097	80 x 100 Grey wide finger wiring duct	3.15 x 3.94	80 x 100	05308	14	2
05098	100 x 100 Grey wide finger wiring duct	3.94 x 3.94	100 x 100	05310	8	2
05099	150 x 100 Grey wide finger wiring duct	5.91 x 3.94	150 x 100	05314	8	2


\*Covers are included with all duct orders.

# Metric wide and narrow slot wiring duct


A

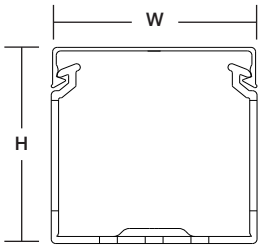

Front view with cover

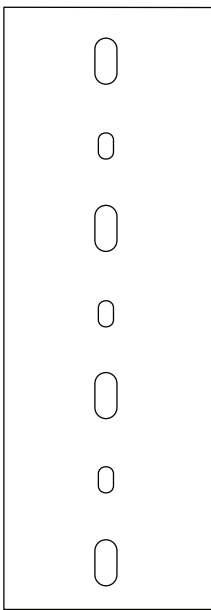

Bottom view



Side view

## Narrow slot wiring duct

Cat. no.	Description (mm)	Size (W x H)		Cover cat. no.*	Duct std. ctn. qty. (meters)	Length (meters)
		In.	mm			
05119	15 x 17 Grey narrow finger wiring duct	0.59 x .67	15 x 17	05300	46	2
05133	25 x 30 Grey narrow finger wiring duct	0.98 x 1.18	25 x 30	05302	58	2
05135	40 x 30 Grey narrow finger wiring duct	1.57 x 1.18	40 x 30	05304	38	2
05137	60 x 30 Grey narrow finger wiring duct	2.36 x 1.18	60 x 30	05306	52	2
05143	25 x 40 Grey narrow finger wiring duct	0.98 x 1.57	25 x 40	05302	48	2
05145	40 x 40 Grey narrow finger wiring duct	1.57 x 1.57	40 x 40	05304	30	2
05147	60 x 40 Grey narrow finger wiring duct	2.36 x 1.57	60 x 40	05306	40	2
05149	80 x 40 Grey narrow finger wiring duct	3.15 x 1.57	80 x 40	05308	32	2
05151	100 x 40 Grey narrow finger wiring duct	3.94 x 1.57	100 x 40	05310	24	2
05153	120 x 40 Grey narrow finger wiring duct	4.72 x 1.57	120 x 40	05312	20	2
05163	25 x 60 Grey narrow finger wiring duct	0.98 x 2.36	25 x 60	05302	34	2
05165	40 x 60 Grey narrow finger wiring duct	1.57 x 2.36	40 x 60	05304	22	2
05167	60 x 60 Grey narrow finger wiring duct	2.36 x 2.36	60 x 60	05306	32	2
05169	80 x 60 Grey narrow finger wiring duct	3.15 x 2.36	80 x 60	05308	24	2
05171	100 x 60 Grey narrow finger wiring duct	3.94 x 2.36	100 x 60	05310	20	2
05173	120 x 60 Grey narrow finger wiring duct	4.72 x 2.36	120 x 60	05312	14	2
05183	25 x 80 Grey narrow finger wiring duct	0.98 x 3.15	25 x 80	05302	28	2
05185	40 x 80 Grey narrow finger wiring duct	1.57 x 3.15	40 x 80	05304	36	2
05187	60 x 80 Grey narrow finger wiring duct	2.36 x 3.15	60 x 80	05306	24	2
05189	80 x 80 Grey narrow finger wiring duct	3.15 x 3.15	80 x 80	05308	16	2
05191	100 x 80 Grey narrow finger wiring duct	3.94 x 3.15	100 x 80	05310	16	2
05193	120 x 80 Grey narrow finger wiring duct	4.72 x 3.15	120 x 80	05312	12	2
05194	25 x 100 Grey narrow finger wiring duct	0.98 x 3.94	25 x 100	05302	20	2
05195	40 x 100 Grey narrow finger wiring duct	1.57 x 3.94	40 x 100	05304	28	2
05196	60 x 100 Grey narrow finger wiring duct	2.36 x 3.94	60 x 100	05306	20	2
05197	80 x 100 Grey narrow finger wiring duct	3.15 x 3.94	80 x 100	05308	14	2
05198	100 x 100 Grey narrow finger wiring duct	3.94 x 3.94	100 x 100	05310	8	2
05199	150 x 100 Grey narrow finger wiring duct	5.91 x 3.94	150 x 100	05314	8	2

\*Covers are included with all duct orders.

## Replacement covers for wiring duct

Cat. no.	Description	Size (mm)	Length / pack qty (meters)
05300	15 mm wiring duct cover	15	2 / 200
05302	25 mm wiring duct cover	25	2 / 60
05304	40 mm wiring duct cover	40	2 / 40
05306	60 mm wiring duct cover	60	2 / 24
05308	80 mm wiring duct cover	80	2 / 16
05310	100 mm wiring duct cover	100	2 / 48
05312	120 mm wiring duct cover	120	2 / 36
05314	150 mm wiring duct cover	150	2 / 28

# Halogen-free wide and narrow slot wiring duct

## Halogen-free thermoplastic duct

### With 8–12 / 4–6 mm slots

- Halogen-free thermoplastic in conformity with VDE 0472 standard Part 815: Br + Cl < 0.2 %, F < 0.1 %
- Toxic smoke index: 25.78 in conformity with NF
- X70-100 and NF F16-101 standards
- Opacity of smoke\*:
  - Dm 352.2 (2 mm)
  - V0F4 475.8 (2 mm) in conformity with NF X10-702 standard (NF F16-101 reference)
- Based on the values obtained in the opacity and toxicity tests of smoke, the material belongs to class F2 (in conformity with NF F16-101 standard)
- Insulating, shock-resistant and self-extinguishing thermoplastic in conformity with UL94V-0 standard, resistant to abnormal heat and fire up to 850 °C (glow-wire test) in conformity with IEC 60695-2-1 standard
- Dimensional stability from -40 to +100 °C
- Standard length 2 m
- Colour RAL 7035 grey
- Conforms to EN 50085-2-3 standard
- Conforms to RoHS directive
- Certification: UL, cULus

\* Reduced smoke opacity during the first 4 minutes of a fire facilitates evacuation from areas of risk.



## Wide slot wiring duct

Cat. no.*	Description (mm)	Size (W x H)		Cover cat. no.*	Duct std. ctn. qty. (meters)	Length (meters)
		In.	mm			
1SL9019A00	15 x 17 Halogen-free wide finger duct	0.59 x .67	15 x 17	1SL5316A00	46	2
1SL9033A00	25 x 30 Halogen-free wide finger duct	0.98 x 1.18	25 x 30	1SL5317A00	58	2
1SL9043A00	25 x 40 Halogen-free wide finger duct	0.98 x 1.57	25 x 40	1SL5317A00	48	2
1SL9063A00	25 x 60 Halogen-free wide finger duct	0.98 x 2.36	25 x 60	1SL5317A00	34	2
1SL9083A00	25 x 80 Halogen-free wide finger duct	0.98 x 3.15	25 x 80	1SL5317A00	28	2
1SL9035A00	40 x 30 Halogen-free wide finger duct	1.57 x 1.18	40 x 30	1SL5318A00	40	2
1SL9045A00	40 x 40 Halogen-free wide finger duct	1.57 x 1.57	40 x 40	1SL5318A00	30	2
1SL9065A00	40 x 60 Halogen-free wide finger duct	1.57 x 2.36	40 x 60	1SL5318A00	22	2
1SL9085A00	40 x 80 Halogen-free wide finger duct	1.57 x 3.15	40 x 80	1SL5318A00	36	2
1SL9095A00	40 x 100 Halogen-free wide finger duct	1.57 x 3.94	40 x 100	1SL5318A00	28	2
1SL9037A00	60 x 30 Halogen-free wide finger duct	2.36 x 1.18	60 x 30	1SL5319A00	52	2
1SL9047A00	60 x 40 Halogen-free wide finger duct	2.36 x 1.57	60 x 40	1SL5319A00	40	2
1SL9067A00	60 x 60 Halogen-free wide finger duct	2.36 x 2.36	60 x 60	1SL5319A00	32	2
1SL9087A00	60 x 80 Halogen-free wide finger duct	2.36 x 3.15	60 x 80	1SL5319A00	24	2
1SL9096A00	60 x 100 Halogen-free wide finger duct	2.36 x 3.94	60 x 100	1SL5319A00	20	2
1SL9049A00	80 x 40 Halogen-free wide finger duct	3.15 x 1.57	80 x 40	1SL5320A00	32	2
1SL9069A00	80 x 60 Halogen-free wide finger duct	3.15 x 2.36	80 x 60	1SL5320A00	24	2
1SL9089A00	80 x 80 Halogen-free wide finger duct	3.15 x 3.15	80 x 80	1SL5320A00	16	2
1SL9097A00	80 x 100 Halogen-free wide finger duct	3.15 x 3.94	80 x 100	1SL5320A00	14	2
1SL9051A00	100 x 40 Halogen-free wide finger duct	3.94 x 1.57	100 x 40	1SL5321A00	24	2
1SL9071A00	100 x 60 Halogen-free wide finger duct	3.94 x 2.36	100 x 60	1SL5321A00	20	2
1SL9091A00	100 x 80 Halogen-free wide finger duct	3.94 x 3.15	100 x 80	1SL5321A00	16	2
1SL9098A00	100 x 100 Halogen-free wide finger duct	3.94 x 3.94	100 x 100	1SL5321A00	8	2
1SL9053A00	120 x 40 Halogen-free wide finger duct	4.72 x 1.57	120 x 40	1SL5322A00	20	2
1SL9073A00	120 x 60 Halogen-free wide finger duct	4.72 x 2.36	120 x 60	1SL5322A00	14	2
1SL9093A00	120 x 80 Halogen-free wide finger duct	4.72 x 3.15	120 x 80	1SL5322A00	12	2

\*Covers are included with all duct orders.

Contact local sales office for pricing and delivery information.

# Halogen-free wide and narrow slot wiring duct

## Narrow slot wiring duct

A

Cat. no.*	Description (mm)	Size (W x H)		Cover cat. no.*	Duct std. ctn. qty. (meters)	Length (meters)
		In.	mm			
1SL9119A00	15 x 17 Halogen-free narrow finger duct	0.59 x 0.67	15 x 17	1SL5316A00	46	2
1SL9133A00	25 x 30 Halogen-free narrow finger duct	0.98 x 1.18	25 x 30	1SL5317A00	58	2
1SL9143A00	25 x 40 Halogen-free narrow finger duct	0.98 x 1.57	25 x 40	1SL5317A00	40	2
1SL9163A00	25 x 60 Halogen-free narrow finger duct	0.98 x 2.36	25 x 60	1SL5317A00	52	2
1SL9183A00	25 x 80 Halogen-free narrow finger duct	0.98 x 3.15	25 x 80	1SL5317A00	48	2
1SL9135A00	40 x 30 Halogen-free narrow finger duct	1.57 x 1.18	40 x 30	1SL5318A00	30	2
1SL9145A00	40 x 40 Halogen-free narrow finger duct	1.57 x 1.57	40 x 40	1SL5318A00	40	2
1SL9165A00	40 x 60 Halogen-free narrow finger duct	1.57 x 2.36	40 x 60	1SL5318A00	32	2
1SL9185A00	40 x 80 Halogen-free narrow finger duct	1.57 x 3.15	40 x 80	1SL5318A00	24	2
1SL9137A00	60 x 30 Halogen-free narrow finger duct	2.36 x 1.18	60 x 30	1SL5319A00	20	2
1SL9147A00	60 x 40 Halogen-free narrow finger duct	2.36 x 1.57	60 x 40	1SL5319A00	34	2
1SL9167A00	60 x 60 Halogen-free narrow finger duct	2.36 x 2.36	60 x 60	1SL5319A00	22	2
1SL9187A00	60 x 80 Halogen-free narrow finger duct	2.36 x 3.15	60 x 80	1SL5319A00	32	2
1SL9149A00	80 x 40 Halogen-free narrow finger duct	3.15 x 1.57	80 x 40	1SL5320A00	24	2
1SL9169A00	80 x 60 Halogen-free narrow finger duct	3.15 x 2.36	80 x 60	1SL5320A00	20	2
1SL9189A00	80 x 80 Halogen-free narrow finger duct	3.15 x 3.15	80 x 80	1SL5320A00	14	2
1SL9151A00	100 x 40 Halogen-free narrow finger duct	3.94 x 1.57	100 x 40	1SL5321A00	28	2
1SL9171A00	100 x 60 Halogen-free narrow finger duct	3.94 x 2.36	100 x 60	1SL5321A00	36	2
1SL9191A00	100 x 80 Halogen-free narrow finger duct	3.94 x 3.15	100 x 80	1SL5321A00	24	2
1SL9153A00	120 x 40 Halogen-free narrow finger duct	4.72 x 1.57	120 x 40	1SL5322A00	16	2
1SL9173A00	120 x 60 Halogen-free narrow finger duct	4.72 x 2.36	120 x 60	1SL5322A00	16	2
1SL9193A00	120 x 80 Halogen-free narrow finger duct	4.72 x 3.15	120 x 80	1SL5322A00	12	2

\*Covers are included with all duct orders.

## Replacement covers for halogen-free wiring duct


Cat. no.	Description	Size (mm)	Length / pack qty (meters)
1SL5316A00	15 mm wiring duct cover	15	2 / 200
1SL5317A00	25 mm wiring duct cover	25	2 / 60
1SL5318A00	40 mm wiring duct cover	40	2 / 40
1SL5319A00	60 mm wiring duct cover	60	2 / 24
1SL5320A00	80 mm wiring duct cover	80	2 / 16
1SL5321A00	100 mm wiring duct cover	100	2 / 48
1SL5322A00	120 mm wiring duct cover	120	2 / 36

# Accessories

## A Trust Thomas & Betts for all your wiring accessories.

### Accessories include:

- Divider walls, enabling multiple channels to be created within a duct channel
- Universal mounting clips that secure channels and wires
- Corner strips that keep corners rigid at tee junctions when used for control panel applications
- Joining strips to unite sections of duct and keep the wall rigid
- Plastic rivets for securing ducts quickly and easily

 = space for colour identifier:

G = Grey



W = White



B = Black




I = Intrinsic blue



### Divider wall

#### Create multiple channels inside wiring ducts.

- Separates high and low voltage to reduce shortages and interference
- Mount inside any Ty-Duct PVC wiring duct using universal mounting clips
- Score lines enable sections to be removed
- Solid and wide slotted style

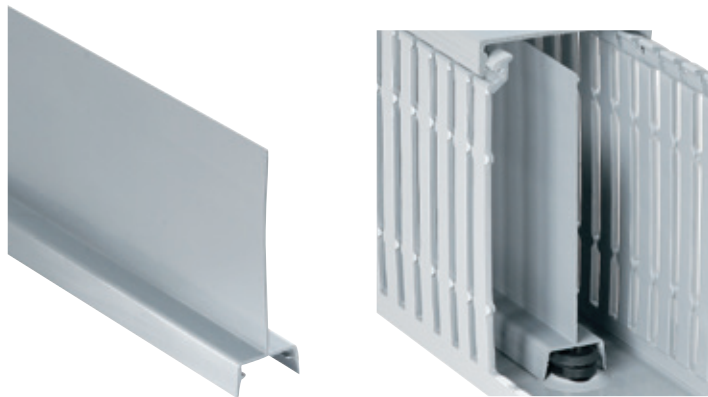

Cat. no.	Description	Length (ft.)	Std. ctn. qty
TY1D [ ] [ ] [ ] 6	1" High wall divider	6	120
TY1.5D [ ] [ ] [ ] 6	1.5" High wall divider	6	120
TY2D [ ] [ ] [ ] 6	2" High wall divider	6	120
TY3D [ ] [ ] [ ] 6	3" High wall divider	6	120
TY4D [ ] [ ] [ ] 6	4" High wall divider	6	120
TY5D [ ] [ ] [ ] 6	5" High wall divider	6	120

+ Catalogue number must be completed by adding suffix SP for solid or WP for wide slot. Example: TY2DSPG6 is a 2" high solid wall grey divider.

### Universal mounting clips

#### One size fits all.

- Added before or after the duct is in place, without additional hardware
- Twists into place — holds securely
- Installs easily using a screwdriver
- Accommodates up to 40 lb. cable ties
- Black polycarbonate construction




Cat. no.	Description	Qty
UMC	Universal fastener mount	100 pk

# Accessories

## Corner strips

### Install smooth round corners on your wiring duct.

- Constructed of rigid PVC
- One-piece design makes installation a snap
- Works with any Ty-Duct wiring duct
- Select from a variety of sizes

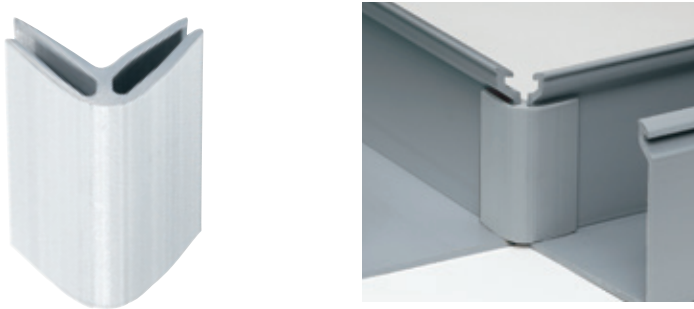

Cat. no.	Description	Length (ft.)	Std. ctn. qty
TYCS[_]6	Corner strip	6	120

+ Catalogue number must be completed by adding suffix G for grey, W for white, I for intrinsic blue, B for black. Example: TYCSG6 is a grey corner strip.

## Joining strips

### Join duct sections easily.

- Slides on duct
- Constructed of rigid PVC
- One-piece design makes installation easy
- Works with any Ty-Duct wiring duct




Cat. no.	Description	Length (ft.)	Std. ctn. qty
TYJS[_]6	Joining strip	6	120

+ Catalogue number must be completed by adding suffix G for grey, W for white, I for intrinsic blue, B for black. Example: TYJSG6 is a grey joining strip.


## Plastic rivets

### Plastic rivets make mounting ducts easy.


- Fast installation
- Durable and economical
- One size

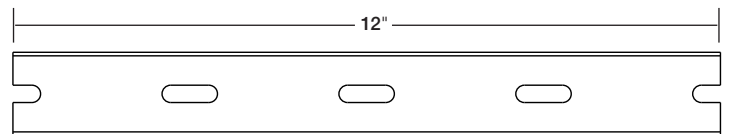

Minimum mounting rivet distance for ducts of 0.75" and 1" wide.

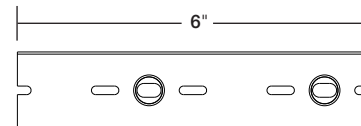

Minimum mounting rivet distance for ducts 1.5" wide.

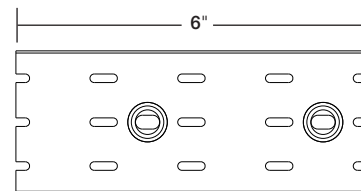

Minimum mounting rivet distance for ducts greater than 1.5" wide. Installed top and bottom.

Cat. no.	Description	Qty
08200C	3/16" Plastic rivet	100 pk



A

## Wire retainer

**Holds wires in place for faster, easier installation and routing.**

- One-size-and-colour-fits-all
- Comes in grey and clear plastic to blend with any duct colour
- Size is 2.5"L and 0.281" x 0.18" square




Cat. no.	Description	Qty.
TYWRC	Wire retainer, clear	100
TYWRG	Wire retainer, grey	100

## Mounting clips

**Ideal for high-temperature environments.**

- Speeds duct mounting
- Enables duct removal
- Provides a stand-off between panel and duct to prevent direct heat transfer — ideal for high temperature environments

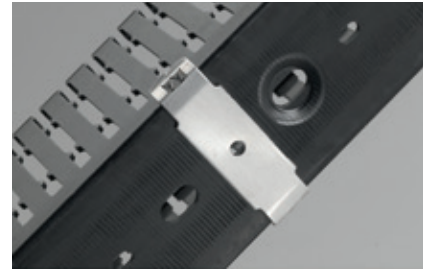

Cat. no.	Width (in.)	Std. ctn. qty.
TY1MC	1	100
TY15MC	1.5	100
TY2MC	2	100
TY3MC	3	100

All are 0.75" D x 0.35" H and made of Type 316 stainless steel.

# The wiring duct tools you need for every application.

**Tools include:**

- Duct cutting tools for a clean professional finish
- Finger cutting tools that make modifications simple
- Notching tools for duct sidewalls to facilitate tee and corner junctions
- Benchmount cutting tools for fast, high volume duct cutting
- Rivet installation tools for quick duct mounting



## Duct/cover cutting tool

**Lightweight and durable.**

- All-steel construction
- Sharp cutting surface
- Replaceable blades available
- Improved performance



Cat. no.	Description
SX-25TB	Handheld duct cutter




## Finger cutting tool

**Cut duct fingers easily.**

- Rugged die-cast construction with insulated handles for a comfortable, non-slip grip
- Removes duct fingers in tight places
- Works with all slotted wiring duct
- Also cuts round and solid wall duct
- Spring loaded



Cat. no.	Description
DK-65TB	Duct finger cutter

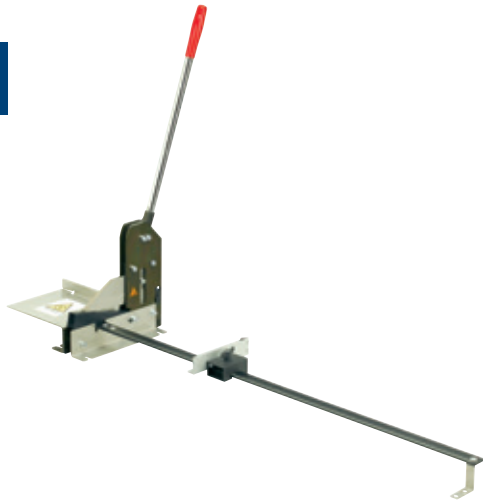

## Bench-mount cutting tool

### For fast, high volume duct cutting.

- Engineered for use with Ty-Duct plastic wiring ducts and covers
- All-steel construction lasts for years
- Adjustable gauge sets the desired length of duct
- Easy-to-read measuring indicator
- Adjustable stop for easy repeated cutting




Cat. no.	Description
DC-125TB	Bench-mount duct cutter



## Notching tool

### Notch duct sidewalls fast.

- Notches sidewalls to bottom scoreline
- Facilitates tee and corner junctions
- Rugged design
- Easy to use
- Spring loaded

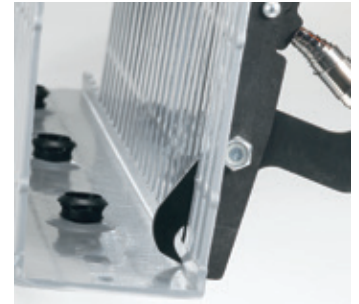

Cat. no.	Description
DNT-100TB	Duct notching tool




## Rivet installation tool

### Mount ducts quickly.

- Use for setting duct rivets
- Pressure on the tool head secures the rivet in place

For duct rivets, see page A-17.

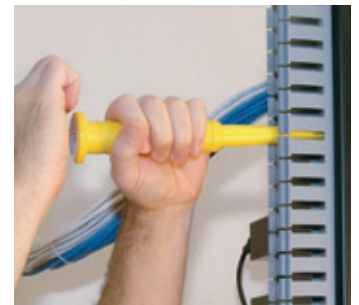

Cat. no.	Description
08205	08200 Series rivet installation tool

For any questions or concerns, please contact the Tool Service Center at 1-800-284-TOOL (8665)

