


Data sheet | Item number: 790-145

Carrier rail; with special perforations; 1000 mm long; tin-plated; silver-colored



www.wago.com/790-145

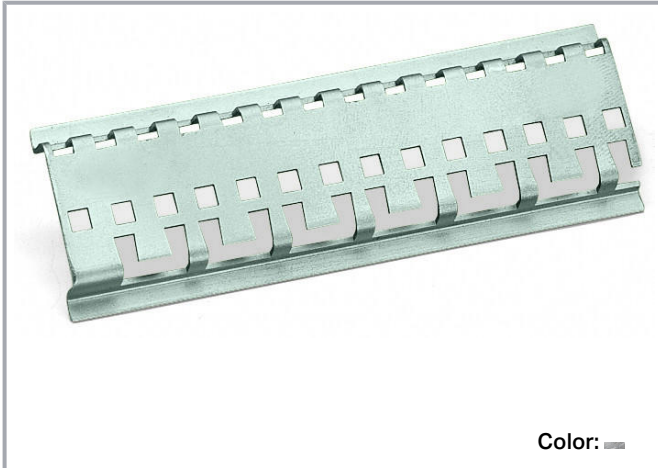

Data

Technical data

Main product function	Shield termination
-----------------------	--------------------

Physical data

Width	1000 mm / 39.37 inch
-------	----------------------

Material data

Color	silver-colored
Weight	256 g

Commercial data

Packaging type	BOX
Country of origin	IT
GTIN	4045454701109
Customs tariff number	72169180000

Compatible products

shield connection

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 790-144

Stand off; for carrier rail; suitable for M5 size screw; with special perforations

www.wago.com/790-144

Downloads

Documentation

Bid Text

790-145 doc - Datei	2017 Aug 31	doc 23.6 kB	Download
790-145 X81 - Datei	2019 Feb 19	xml 2.6 kB	Download

CAD/CAE-Data

CAE data

WSCAD Universe 790-145	URL	Download
ZUKEN Portal 790-145	URL	Download
EPLAN Data Portal 790-145	URL	Download

CAD data

2D/3D Models 790-145	URL	Download
----------------------	-----	----------

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 790-145 Carrier rail; with special perforations; 1000 mm long; tin-plated; silver-colored	URL	Download
---	-----	----------

Installation Notes


Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

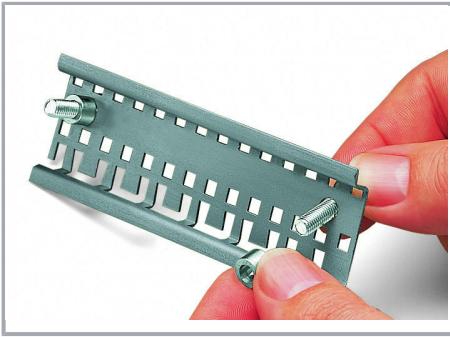


Securing a spacer sleeve to a specialty slotted DIN-rail.

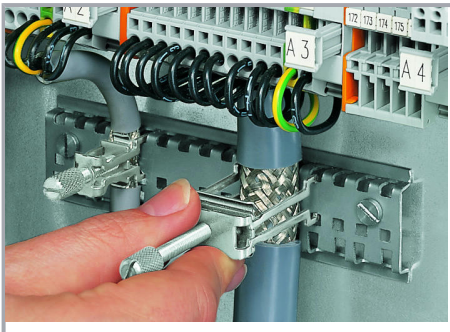

Securing an additional shield clamping saddle.

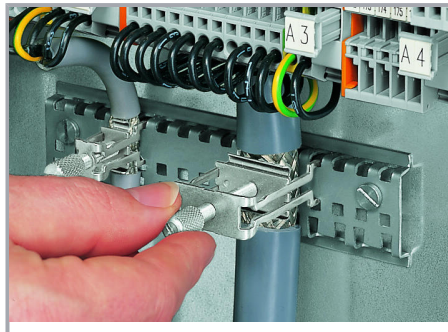


Tightening/removing a shield clamping saddle.

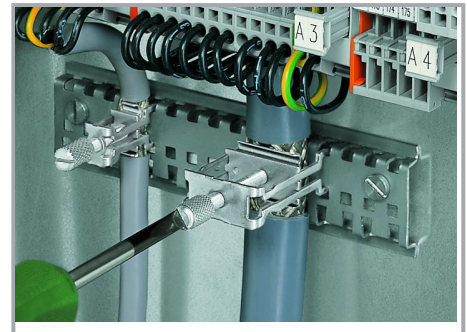

After connection, tighten the knurled screw to complete the installation.

Recommended tightening torque: 0.5 Nm

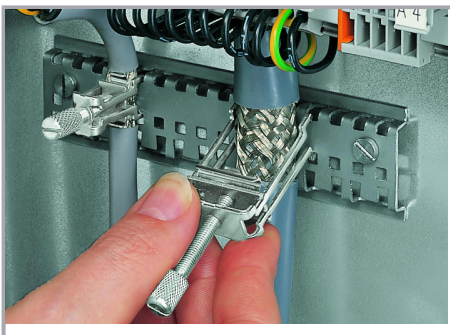

To remove the clamping saddle, unscrew until ratcheted mechanism is released, then slightly tip saddle and remove the clamping saddle.

Subject to changes. Please also observe the further product documentation!