

IGBT – Power, Co-PAK N-Channel, Field Stop VII (FS7), Non-SCR, TO247-3L

1200 V, 1.7 V, 140 A

FGY140T120SWD

Description

Using the novel field stop 7th generation IGBT technology and the Gen7 Diode in TO247 3-lead package, FGY140T120SWD offers the optimum performance with low switching and conduction losses for high-efficiency operations in various applications like Solar, UPS, and ESS.

Features

- Maximum Junction Temperature $T_J = 175^\circ\text{C}$
- Positive Temperature Coefficient for Easy Parallel Operation
- High Current Capability
- Smooth and Optimized Switching
- Low Switching Loss
- RoHS Compliant

Applications

- Boost and Inverter in Solar System
- UPS
- Energy Storage System

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)



Parameter	Symbol	Value	Unit
Collector-to-Emitter Voltage	V_{CES}	1200	V
Gate-to-Emitter Voltage	V_{GES}	± 20	
Transient Gate-to-Emitter Voltage		± 30	
Collector Current	I_C	$T_C = 25^\circ\text{C}$ (Note 1)	280
		$T_C = 100^\circ\text{C}$	140
Power Dissipation	P_D	$T_C = 25^\circ\text{C}$	1153
		$T_C = 100^\circ\text{C}$	576
Pulsed Collector Current	I_{CM}	560	A
Diode Forward Current	I_F	$T_C = 25^\circ\text{C}$	280
		$T_C = 100^\circ\text{C}$	140
Pulsed Diode Forward Current	I_{FM}	560	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to +175	$^\circ\text{C}$
Lead Temperature for Soldering Purposes	T_L	260	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Value limited by bond wire
2. Repetitive rating: Pulse width limited by max. junction temperature.


BV_{CES}	$V_{CE(SAT)}$	I_C
1200 V	1.7 V	140 A

PIN CONNECTIONS



TO-247-3LD
CASE 340CD

MARKING DIAGRAM



\$Y	= onsemi Logo
&Z	= Assembly Plant Code
&3	= 3-Digit Date Code
&K	= 2-Digit Lot Traceability Code
FGY140120SWD	= Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping
FGY140T120SWD	TO-247-3LD (Pb-Free)	30 Units / Tube

FGY140T120SWD

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case for IGBT	$R_{\theta JC}$	0.13	°C/W
Thermal Resistance, Junction-to-Case for Diode		0.23	
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	40	

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-to-Emitter Breakdown Voltage	BV_{CES}	$V_{GE} = 0\text{ V}, I_C = 5\text{ mA}$	1200	-	-	V
Breakdown Voltage Temperature Coefficient	$\frac{\Delta BV_{CES}}{\Delta T_J}$	$V_{GE} = 0\text{ V}, I_C = 5\text{ mA}$	-	1226	-	mV/°C
Collector-to-Emitter Cut-Off Current	I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$	-	-	40	μA
Gate-to-Emitter Leakage Current	I_{GES}	$V_{GE} = 20\text{ V}, V_{CE} = 0\text{ V}$	-	-	±400	nA

ON CHARACTERISTICS

Gate-to-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 140\text{ mA}, T_J = 25^\circ\text{C}$	5.60	6.54	7.40	V
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE} = 15\text{ V}, I_C = 140\text{ A}, T_J = 25^\circ\text{C}$	1.35	1.7	2.0	
		$V_{GE} = 15\text{ V}, I_C = 140\text{ A}, T_J = 175^\circ\text{C}$	-	2.25	-	

DYNAMIC CHARACTERISTICS

Input Capacitance	C_{ies}	$V_{CE} = 30\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$	-	13395.0	-	pF
Output Capacitance	C_{oes}		-	394	-	
Reverse Transfer Capacitance	C_{res}		-	55.4	-	
Total Gate Charge	Q_g	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}, I_C = 140\text{ A}$	-	415.4	-	nC
Gate-to-Emitter Charge	Q_{ge}		-	104.8	-	
Gate-to-Collector Charge	Q_{gc}		-	154.8	-	

SWITCHING CHARACTERISTICS

Turn-on Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}, I_C = 70\text{ A}, R_G = 4.7\ \Omega, T_J = 25^\circ\text{C}$	-	55.2	-	ns
Turn-off Delay Time	$t_{d(off)}$		-	249.6	-	
Rise Time	t_r		-	43.2	-	
Fall Time	t_f		-	65.6	-	
Turn-on Switching Loss	E_{on}		-	4.7	-	
Turn-off Switching Loss	E_{off}	-	2.3	-		
Total Switching Loss	E_{ts}	-	6.9	-		
Turn-on Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}, I_C = 140\text{ A}, R_G = 4.7\ \Omega, T_J = 25^\circ\text{C}$	-	59.2	-	ns
Turn-off Delay Time	$t_{d(off)}$		-	227.2	-	
Rise Time	t_r		-	97.6	-	
Fall Time	t_f		-	67.2	-	
Turn-on Switching Loss	E_{on}		-	12.5	-	
Turn-off Switching Loss	E_{off}	-	5.1	-		
Total Switching Loss	E_{ts}	-	17.6	-		

FGY140T120SWD

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS						
Turn-on Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}$ $I_C = 70\text{ A } R_G = 4.7\ \Omega T_J = 175^\circ\text{C}$	-	48.0	-	ns
Turn-off Delay Time	$t_{d(off)}$		-	284.8	-	
Rise Time	t_r		-	41.6	-	
Fall Time	t_f		-	96.0	-	
Turn-on Switching Loss	E_{on}		-	7.5	-	mJ
Turn-off Switching Loss	E_{off}		-	3.1	-	
Total Switching Loss	E_{ts}		-	10.6	-	
Turn-on Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}$ $I_C = 140\text{ A } R_G = 4.7\ \Omega T_J = 175^\circ\text{C}$	-	52.8	-	ns
Turn-off Delay Time	$t_{d(off)}$		-	264.0	-	
Rise Time	t_r		-	92.8	-	
Fall Time	t_f		-	113.6	-	
Turn-on Switching Loss	E_{on}		-	17.1	-	mJ
Turn-off Switching Loss	E_{off}		-	7.4	-	
Total Switching Loss	E_{ts}		-	24.5	-	

DIODE CHARACTERISTICS

Forward Voltage	V_F	$I_F = 140\text{ A}, T_J = 25^\circ\text{C}$	1.73	1.95	2.33	V
		$I_F = 140\text{ A}, T_J = 175^\circ\text{C}$	-	2.15	-	

DIODE SWITCHING CHARACTERISTICS, INDUCTIVE LOAD

Reverse Recovery Time	t_{rr}	$V_R = 600\text{ V}, I_F = 70\text{ A},$ $di_F/dt = 1000\text{ A}/\mu\text{s}, T_J = 25^\circ\text{C}$	-	219.4	-	ns
Reverse Recovery Charge	Q_{rr}		-	4507.9	-	nC
Reverse Recovery Energy	E_{REC}		-	1581.2	-	mJ
Peak Reverse Recovery Current	I_{RRM}		-	41.1	-	A
Reverse Recovery Time	t_{rr}	$V_R = 600\text{ V}, I_F = 140\text{ A},$ $di_F/dt = 1000\text{ A}/\mu\text{s}, T_J = 25^\circ\text{C}$	-	307.3	-	ns
Reverse Recovery Charge	Q_{rr}		-	7047.2	-	nC
Reverse Recovery Energy	E_{REC}		-	2727.5	-	mJ
Peak Reverse Recovery Current	I_{RRM}		-	45.9	-	A
Reverse Recovery Time	t_{rr}	$V_R = 600\text{ V}, I_F = 70\text{ A},$ $di_F/dt = 1000\text{ A}/\mu\text{s}, T_J = 175^\circ\text{C}$	-	425.3	-	ns
Reverse Recovery Charge	Q_{rr}		-	13076.8	-	nC
Reverse Recovery Energy	E_{REC}		-	5492.0	-	mJ
Peak Reverse Recovery Current	I_{RRM}		-	61.5	-	A
Reverse Recovery Time	t_{rr}	$V_R = 600\text{ V}, I_F = 140\text{ A},$ $di_F/dt = 1000\text{ A}/\mu\text{s}, T_J = 175^\circ\text{C}$	-	516.5	-	ns
Reverse Recovery Charge	Q_{rr}		-	18736.9	-	nC
Reverse Recovery Energy	E_{REC}		-	7591.3	-	mJ
Peak Reverse Recovery Current	I_{RRM}		-	72.6	-	A

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

FGY140T120SWD

TYPICAL CHARACTERISTICS

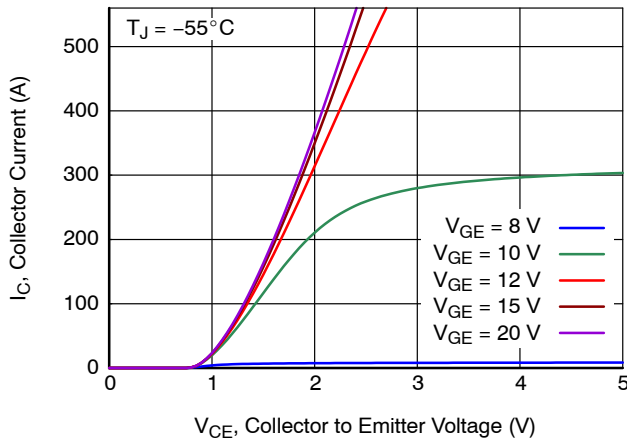


Figure 1. Output Characteristics

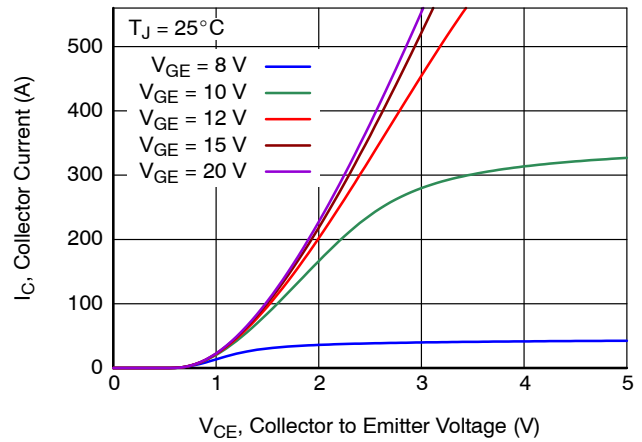


Figure 2. Output Characteristics

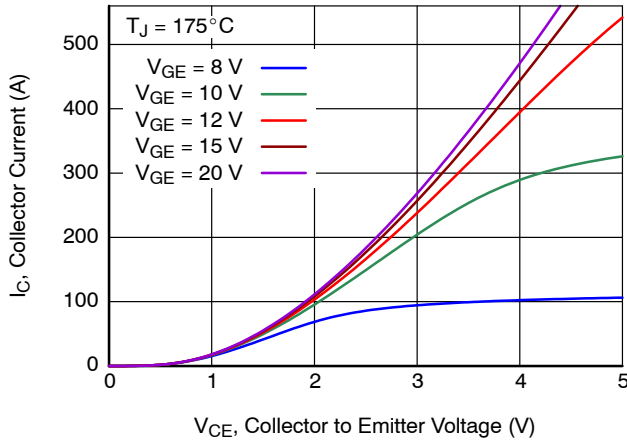


Figure 3. Output Characteristics

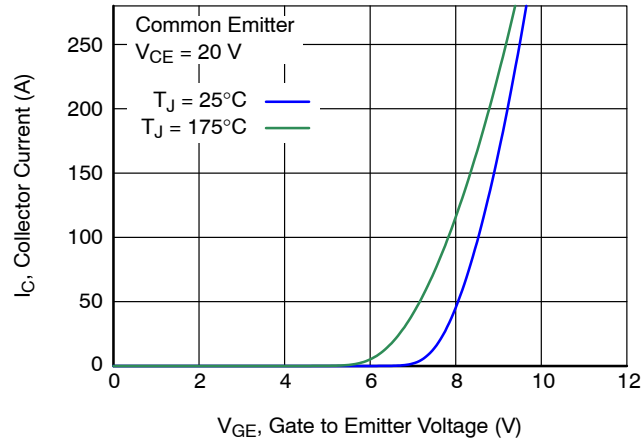


Figure 4. Transfer Characteristics

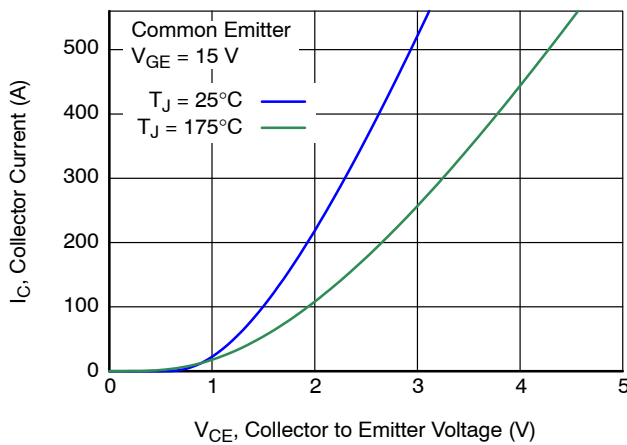


Figure 5. Saturation Characteristics

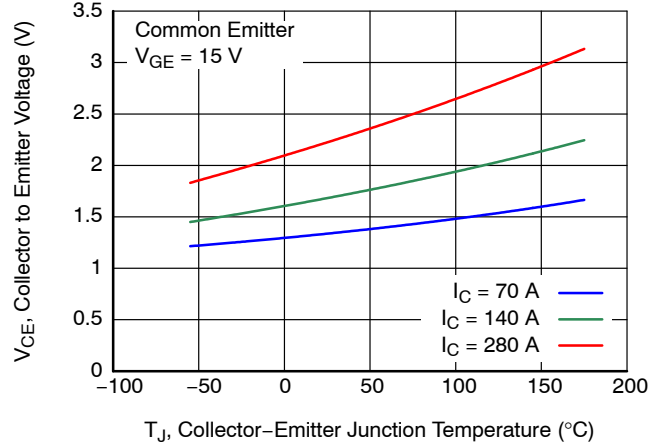


Figure 6. Saturation Voltage vs. Junction Temperature

FGY140T120SWD

TYPICAL CHARACTERISTICS

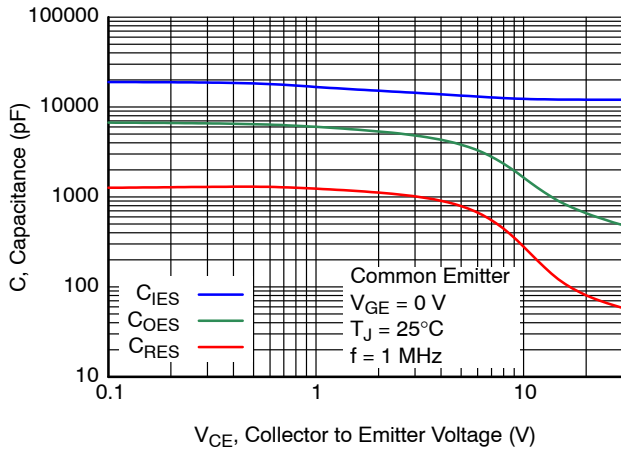


Figure 7. Capacitance Characteristics

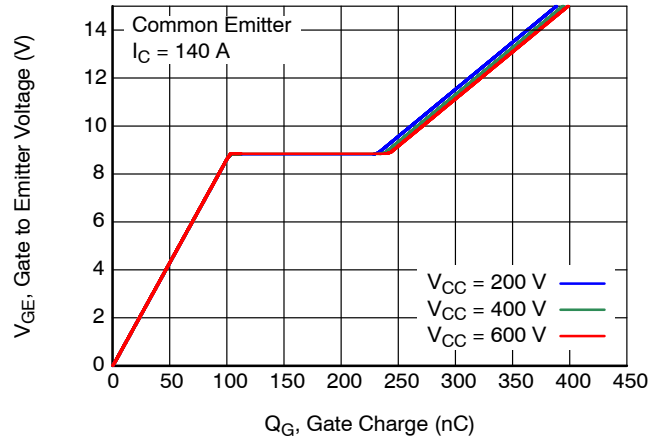


Figure 8. Gate Charge Characteristics

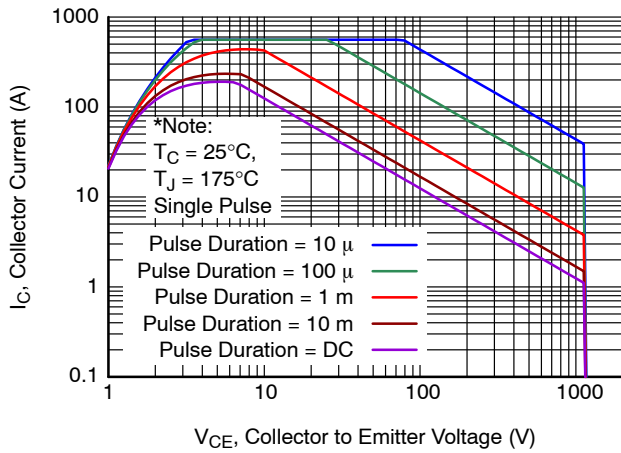


Figure 9. SOA Characteristics

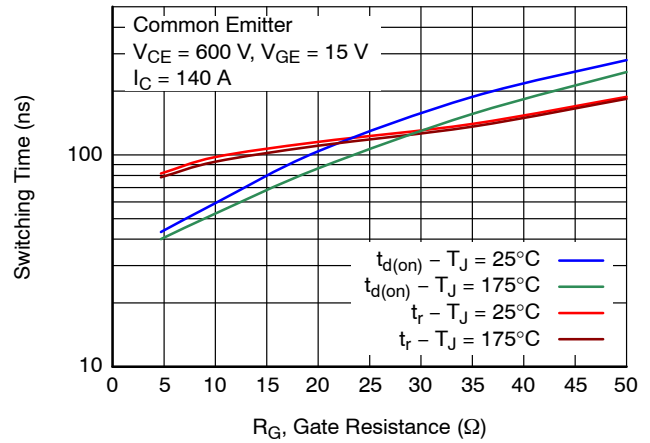


Figure 10. Turn-on Switching Time vs. Gate Resistance

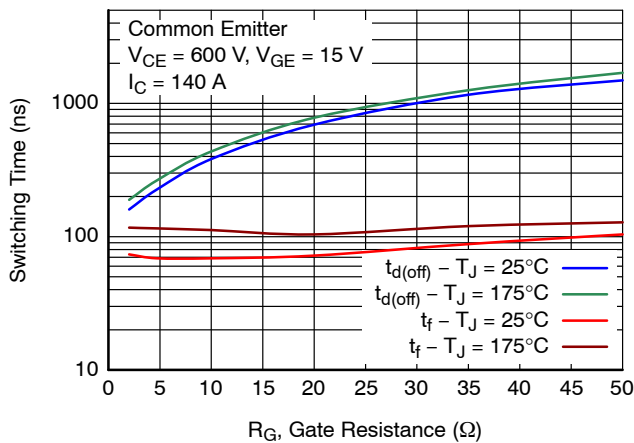


Figure 11. Turn-Off Switching Time vs. Gate Resistance

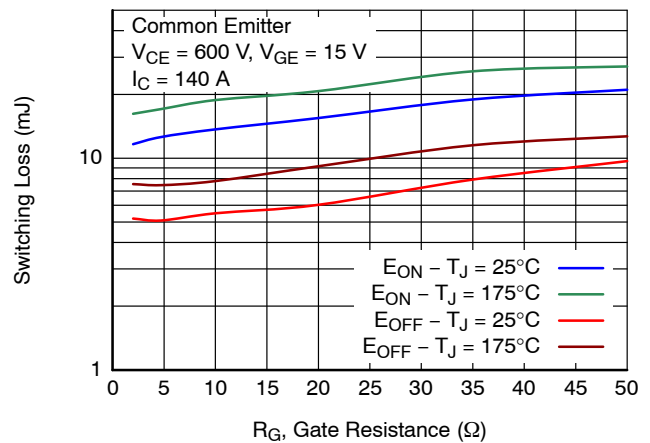


Figure 12. Switching Loss vs. Gate Resistance

FGY140T120SWD

TYPICAL CHARACTERISTICS

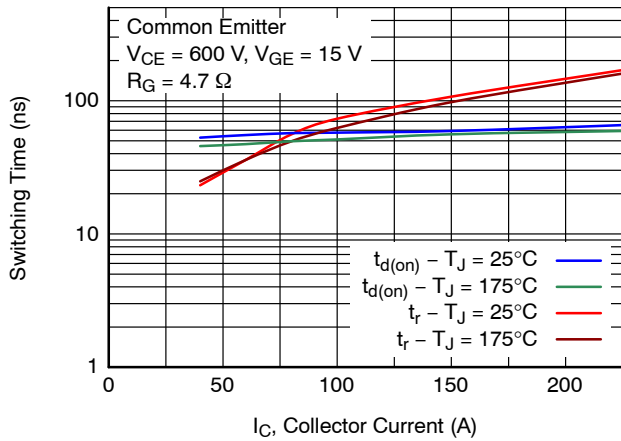


Figure 13. Turn-On Switching Time vs. Collector Current

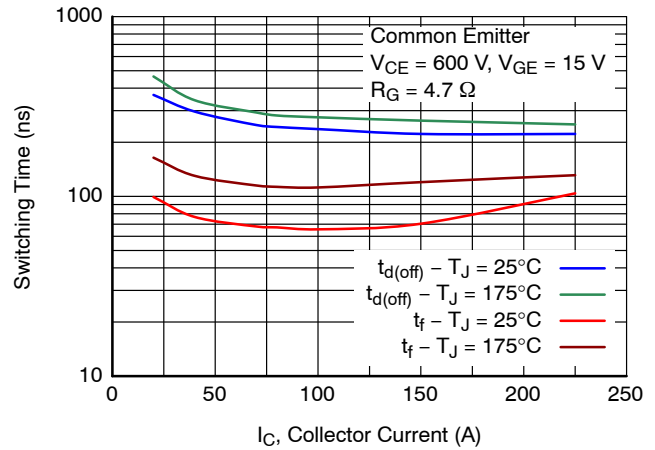


Figure 14. Turn-Off Switching Time vs. Collector Current

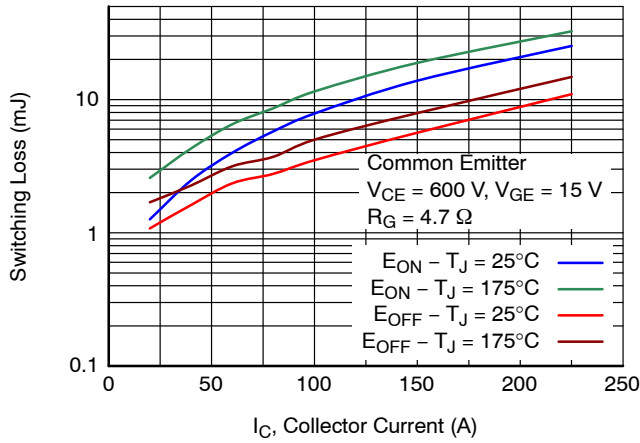


Figure 15. Turn-On Switching Loss vs. Collector Current

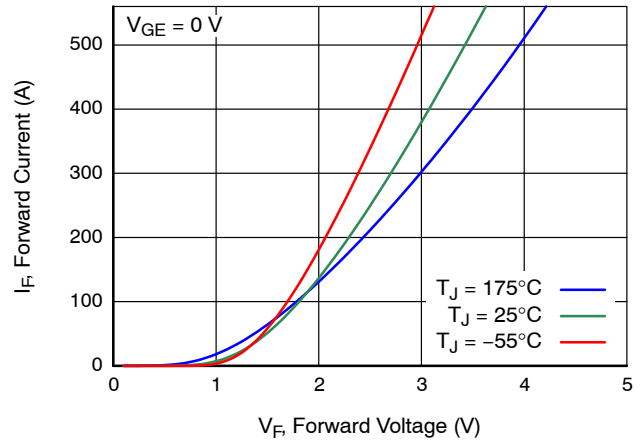


Figure 16. Diode Forward Characteristics

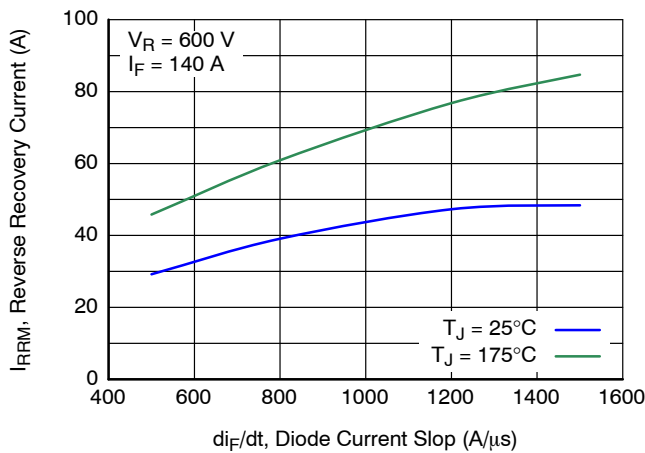


Figure 17. Diode Reverse Recovery Current

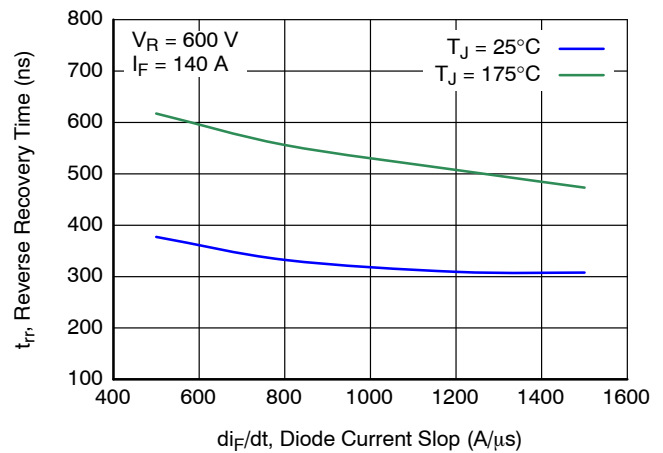


Figure 18. Diode Reverse Recovery Time

FGY140T120SWD

TYPICAL CHARACTERISTICS

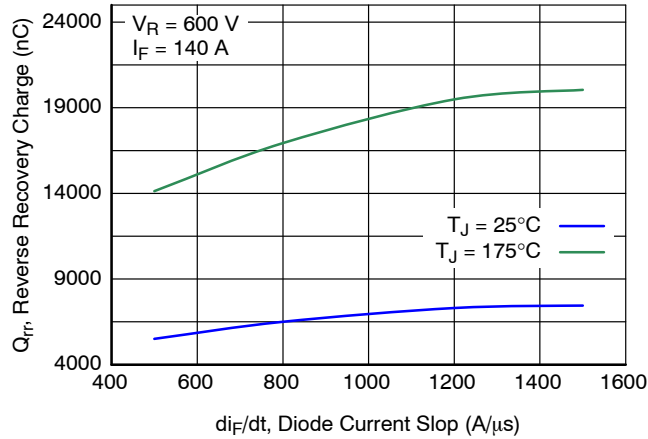


Figure 19. Diode Stored Charge Characteristics

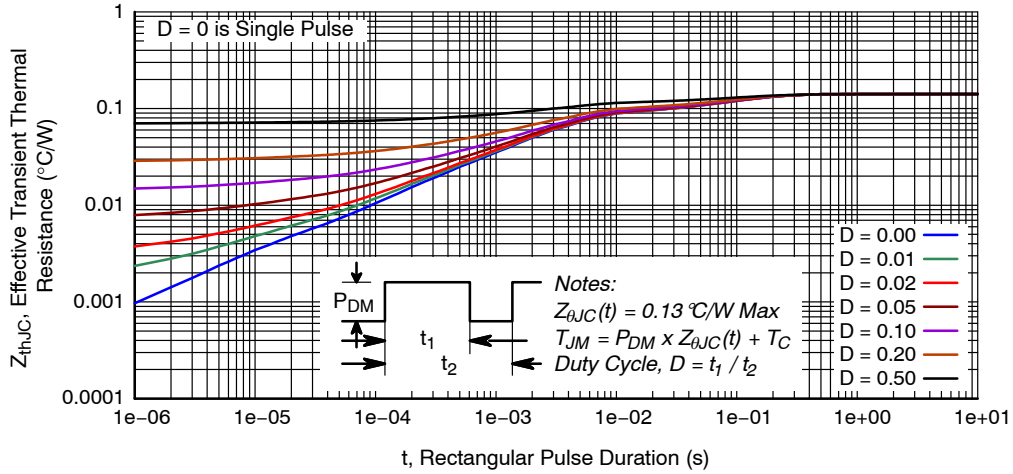


Figure 20. Transient Thermal Impedance of IGBT

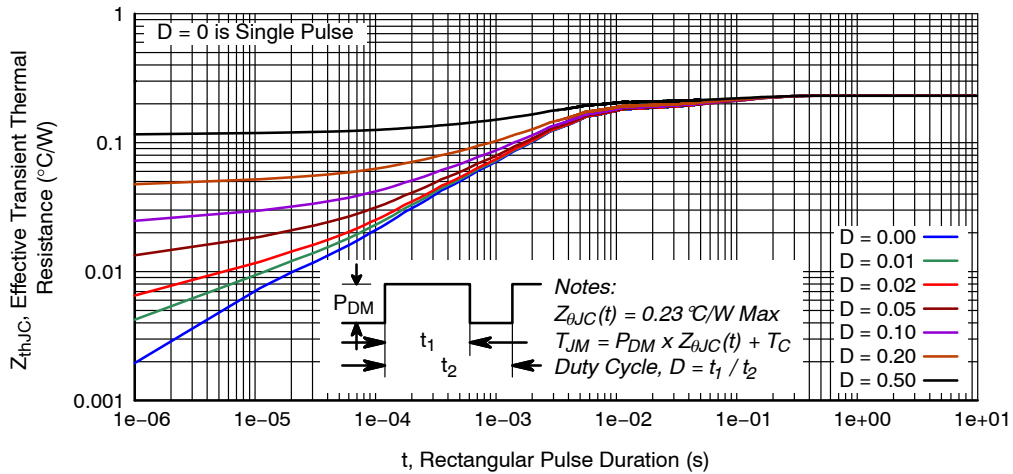


Figure 21. Transient Thermal Impedance of Diode


FGY140T120SWD

PACKAGE DIMENSIONS

TO-247-3LD
CASE 340CD
ISSUE A

NOTES:

- A. THIS PACKAGE DOES NOT CONFORM TO ANY STANDARDS.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- D. DIMENSION AND TOLERANCE AS PER ASME Y14.5-2009.

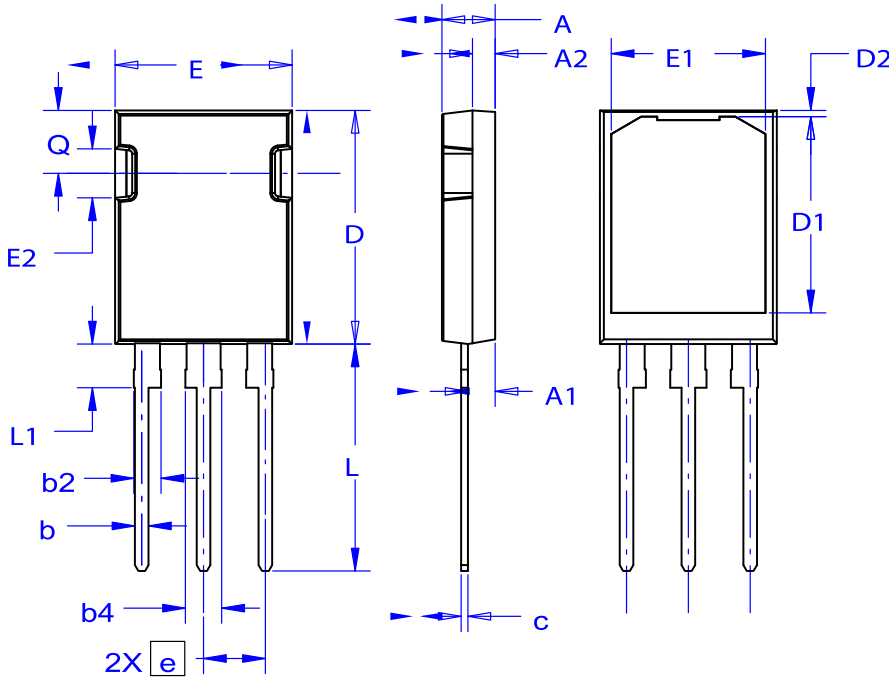

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.58	4.70	4.82
A1	2.20	2.40	2.60
A2	1.80	2.00	2.20
D	20.32	20.57	20.82
E	15.37	15.62	15.87
E2	4.12	4.32	4.52
e	~	5.45	~
L	19.90	20.00	20.10
L1	3.69	3.81	3.93
Q	5.34	5.46	5.58
b	1.10	1.20	1.30
b2	2.10	2.24	2.39
b4	2.87	3.04	3.20
c	0.51	0.61	0.71
D1	16.63	16.83	17.03
D2	0.51	0.93	1.35
E1	13.40	13.60	13.80

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marketing.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of the part. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800-282-9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:
Phone: 00421 33 790 2910
For additional information, please contact your local Sales Representative