

Automotive Power MOSFET Module

NXV08H400XT2

Features


- 2 Phase MOSFET Module
 At Customer Side this Module Can Be Used as 1/2 Bridge MOSFET Module by Combining 2 Phase Out Power Terminals
- Electrically Isolated DBC Substrate for Low Rthjc
- Compact Design for Low Total Module Resistance
- Module Serialization for Full Traceability
- Module Level AQC324 Qualified. Components Inside are AEC Q101 (MOSFET) & AEC Q200 (Passives) Qualified
- UL 94 V-0 Compliant
- This Device is Pb-Free and is RoHS Compliant

Applications

- 48 V Inverter, 48 V Traction


Benefits

- Enable Design of Small, Efficient and Reliable System for Reduced Vehicle Fuel Consumption and CO₂ Emission
- Simplified Vehicle Assembly
- Low Thermal Resistance to Junction to Heat Sink by Direct Mounting via Thermal Interface Material between Module Case and Heat Sink
- Low Inductance



APM17-MDA
 CASE MODHU

MARKING DIAGRAM



NXV08H400XT2	= Specific Device Code
ZZZ	= Lot ID
AT	= Assembly & Test Location
Y	= Year
WW	= Work Week
NNN	= Serial Number

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

NXV08H400XT2

ORDERING INFORMATION

Part Number	Package	Pb-Free and RoHS Compliant	Operating Ambient Temperature Range	Packing Method
NVX08H400XT2	APM17-MDA	yes	-40~125°C	Tube

Pin Configuration

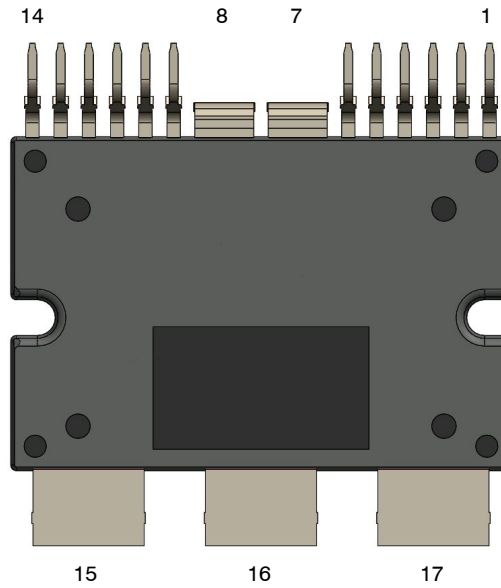


Figure 1. Pin Configuration

PIN DESCRIPTION

Pin No.	Description	Remark
1	Q2 Gate	
2	Q2 Source Sense	
3	B+ #2 Sense	
4	Q4 Gate	
5	Q4 Source Sense	
6	NTC1	
7	Phase Out2	For 3 phase motor inverter, those 2 pins can be used as one phase out
8	Phase Out1	
9	NTC2	
10	Q3 Source Sense	
11	Q3 Gate	
12	B+ #1 Sense	
13	Q1 Source Sense	
14	Q1 Gate	
15	B+ #1	
16	GND	
17	B+ #2	

NXV08H400XT2

Block Diagram

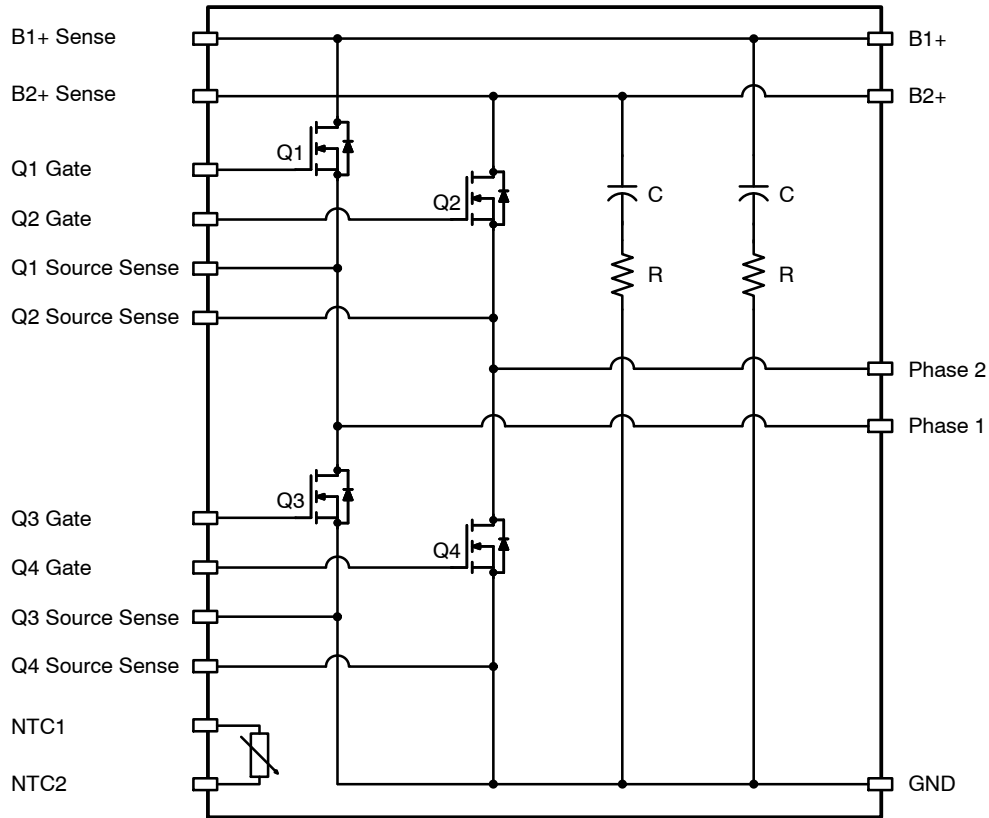


Figure 2. Schematic

Flammability Information

All materials present in the power module meet UL flammability rating class 94V-0.

Compliance to RoHS Directives

The power module is 100% lead free and RoHS compliant 2000/53/C directive.

Solder

Solder used is a lead free SnAgCu alloy.

Base of the leads, at the interface with the package body should not be exposed to more than 200°C during mounting on the PCB, this to prevent the remelt of the solder joints.

ABSOLUTE MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Max.	Unit
VDS(Q1-Q4)	Drain to Source Voltage	80	V
VGS(Q1-Q4)	Gate to Source Voltage	± 20	V
EAS(Q1-Q4)	Single Pulse Avalanche Energy (Note 1)	2445	mJ
T_J	Maximum Junction Temperature	175	$^\circ\text{C}$
T_{STG}	Storage Temperature	125	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Starting $T_J = 25^\circ\text{C}$, $L = 0.47\text{ mH}$, $I_{AS} = 102\text{ A}$, $V_{DD} = 72\text{ V}$ during inductor charging and $V_{DD} = 0\text{ V}$ during time in avalanche.

NXV08H400XT2

ELECTRICAL CHARACTERISTICS (T_J = 25°C, unless otherwise noted)

Characteristic		Condition	Min	Typ	Max	Unit
BVDSS	Drain-to-Source Breakdown Voltage	I _D = 1 mA, V _{GS} = 0 V	80	-	-	
VGS(th)	Gate to Source Threshold Voltage	V _{GS} = V _{DS} , I _D = 1 mA	2	-	4.6	V
VSD	Source-to-Drain Diode Voltage	I _{SD} = 160 A, V _{GS} = 0 V	-	0.79	1.1	V
Measured RDS(ON) Q1, Q2	Q1, Q2 (High Side) MOSFET (Note 2) (Note 3)	V _{GS} = 12 V, I _D = 160 A, T _J = 25°C	-	0.65	0.765	mΩ
Measured RDS(ON) Q3, Q4	Q3, Q4 (Low Side) MOSFET (Note 2) (Note 3)	V _{GS} = 12 V, I _D = 160 A, T _J = 25°C	-	0.60	0.71	mΩ
Pure RDS(ON) Q1, Q2, Q3, Q4	Rdson Measurement with Kelvin pin with min impact of measurement path (Note 2)	V _{GS} = 12 V, I _D = 160 A, T _J = 25°C	-	0.46	0.58	mΩ
IGSS	Gate-to-Source Leakage Current	V _{GS} = ±20 V, V _{DS} = 0 V, T _J = 25°C	-100	-	+100	nA
IDSS	Drain-to-Source Leakage Current	V _{DS} = 80 V, V _{GS} = 0 V, T _J = 25°C	-	-	2	μA
Module RDS(ON) for Q1 and Q2: From B+1 (or B+2), via Q1 (or Q2), to Phase Out 1 (Phase Out 2) (Note 3)		V _{GS} = 12 V, I _D = 160 A, T _J = 25°C	-	0.96	1.32	mΩ
Module RDS(ON) for Q3 and Q4: From Phase Out 1 (Phase Out 2), via Q3 (Q4), to GND PINs (Note 3)		V _{GS} = 12 V, I _D = 160 A, T _J = 25°C	-	0.9	1.25	mΩ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

- All bare die MOSFETs have same die size and same level of Rdson value. However the different Rdson values listed in the datasheet are due to the different access points available inside the module for Rdson measurement. Q3 and Q4 (Low side FETs) has the shortest Rdson measurement path in the layout. For exact FET rdson, it is recommended to use the Rdson value of Q3 or Q4 for the Kelvin pin with min impact of measurement path. Here Pure Rdson values of Q1,Q2,Q3,Q4 are from Q3 and Q4 measurement from NXV08H400XT1 datasheet. This value to be used for the actual MOSFET Rdson for Power loss and Temperature simulations.
- Module Rdson means total resistance of the measurement path btw Power terminals, referring to the resistance measurement methods table.

RESISTANCE MEASUREMENTS METHODS

	+ Force Pin#	- Force Pin#	+ Sense Pin#	- Sense Pin#
FET Rdson Q1	B1+	Phase1	B1+ Sense	Q1 Source Sense
FET Rdson Q2	B2+	Phase2	B2+ Sense	Q2 Source Sense
FET Rdson Q3	Phase1	GND	Q1 Source Sense	Q3 Source Sense
FET Rdson Q4	Phase2	GND	Q2 Source Sense	Q4 Source Sense
Module Rdson Q1	B1+	Phase1	B1+	Phase1
Module Rdson Q2	B2+	Phase2	B2+	Phase2
Module Rdson Q3	Phase1	GND	Phase1	GND
Module Rdson Q4	Phase2	GND	Phase2	GND

TEMPERATURE SENSE (NTC THERMISTOR)

Parameter	Min	Typ	Max	Unit		
Voltage	Current = 1 mA, Temperature 25°C		7.5	-	12	V

THERMAL RESISTANCE

Parameter	Min	Typ	Max	Unit		
Rthjc: Thermal Resistance Junction to case, Single Inverter FET	Q1, Q2, Q3, Q4 Thermal Resistance J-C		-	-	0.19	°C/W

NXV08H400XT2

ISOLATION VOLTAGE (Isolation voltage between the Base plate and to control pins or power terminals.)

Test	Test Condition	Test Time	Min	Max	Unit
Leakage @ Isolation Voltage (Hi-Pot)	VAC = 3 kV	Time = 1 s	-	250	μA

DYNAMIC AND SWITCHING CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
--------	-----------	-----------	-----	-----	-----	------

DYNAMIC CHARACTERISTICS

C_{iss}	Input Capacitance	$V_{DS} = 40\text{ V}, V_{GS} = 0\text{ V}, f = 750\text{ kHz}$	-	30,150	-	pF
C_{oss}	Output Capacitance		-	4,505	-	pF
C_{rss}	Reverse Transfer Capacitance		-	77	-	pF
R_g	Gate Resistance	$f = 750\text{ kHz}$	-	4.3	-	Ω
$Q_{g(tot)}$	Total Gate Charge	$V_{GS} = 0\text{ to }12\text{ V}, I_D = 160\text{ A}$	-	502	-	nC
Q_{gs}	Gate to Source Gate Charge		-	193	-	nC
Q_{gd}	Gate to Drain "Miller" Charge		-	89	-	nC

SWITCHING CHARACTERISTICS

t_{on}	Turn-On Time	$V_{DD} = 48\text{ V}, I_D = 400\text{ A}$ $V_{GS} = 12\text{ V}, R_{G(on/off)} = 15/15\text{ Ω}$	-	710	-	ns
$t_{d(on)}$	Turn-On Delay Time		-	235	-	ns
t_r	Turn-On Rise Time		-	475	-	ns
$t_{d(off)}$	Turn-Off Delay Time		-	608	-	ns
t_f	Turn-Off Fall Time		-	290	-	ns
t_{off}	Turn-Off Time		-	898	-	ns

DRAIN-SOURCE DIODE CHARACTERISTICS

t_{RR}	Reverse Recovery Time	$V_{DD} = 48\text{ V}, I_D = 400\text{ A}$ $V_{GS} = 12\text{ V}, R_{G(on/off)} = 15/15\text{ Ω}$	-	59	-	ns
Q_{RR}	Reverse Recovery Charge		-	1433	-	nC

COMPONENTS

Component	Description	Type	Qty.	Specification
MOSFET	Bare Die	Bare Die	4	80 V 0.58 mΩ
NTC	10 kΩ ±1% 1,600 x 800 μm	Discrete	1	B-Constant B _{25/50} = 3380K B _{25/85} = 3435K B _{25/100} = 3455K
Capacitor (Snubber)	1,800 x 800 μm	Discrete	2	15 nF
Resistor (Snubber)	2,000 x 1,250 μm	Discrete	2	1 Ω

NXV08H400XT2

TYPICAL CHARACTERISTICS

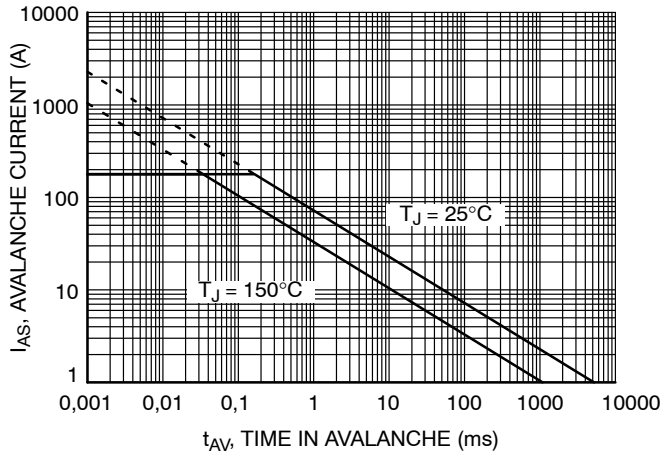


Figure 3. Unclamped Inductive Switching Capability

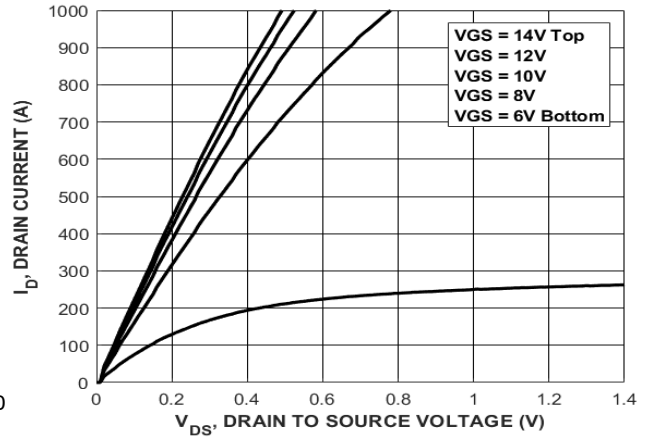


Figure 4. Saturation Characteristics

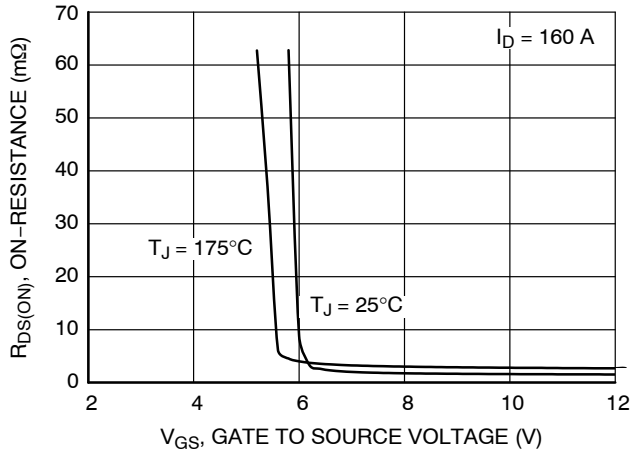


Figure 5. $R_{DS(on)}$ vs. Gate Voltage

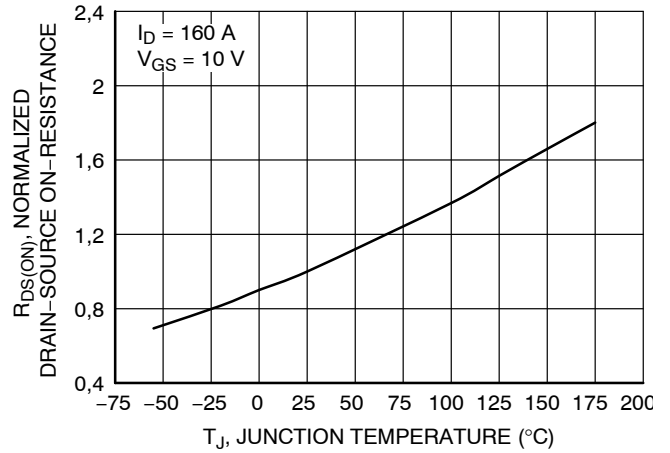


Figure 6. $R_{DS(on)}$ vs. Temperature

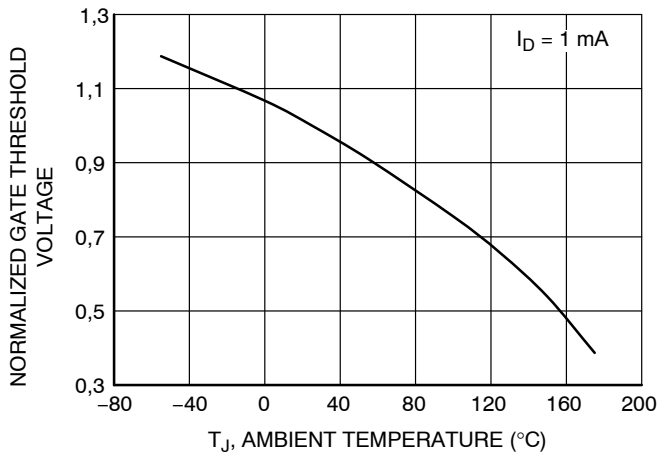


Figure 7. Normalized Gate Threshold Voltage vs. Temperature

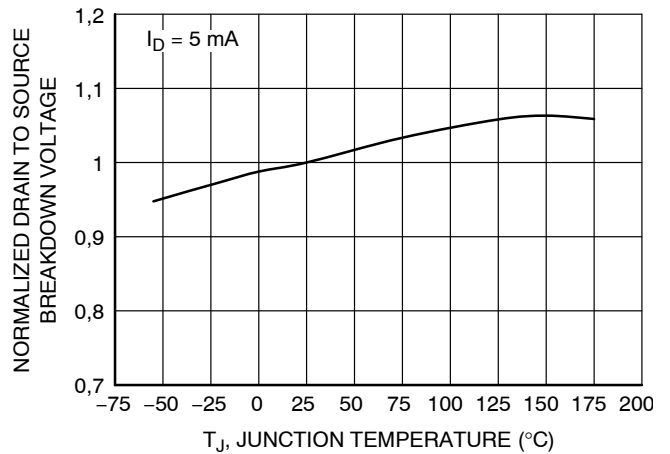


Figure 8. Normalized Drain to Source Breakdown Voltage vs. Junction Temperature

NXV08H400XT2

TYPICAL CHARACTERISTICS (continued)

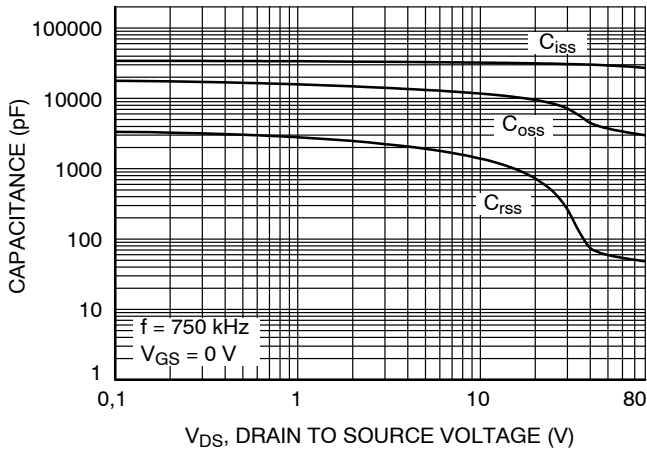


Figure 9. Capacitance vs. Drain to Source Voltage

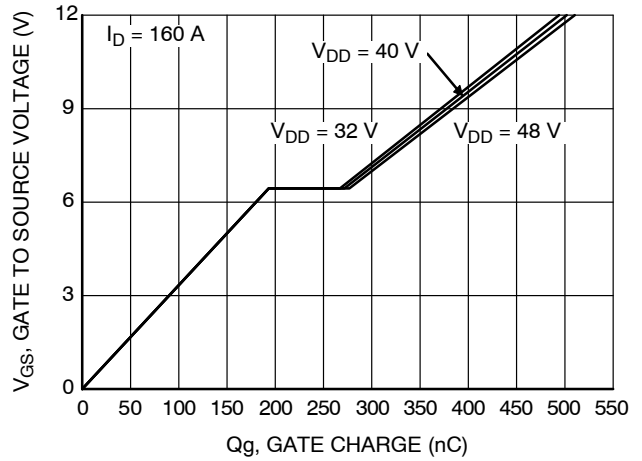


Figure 10. Gate Charge vs. Drain to Source Voltage

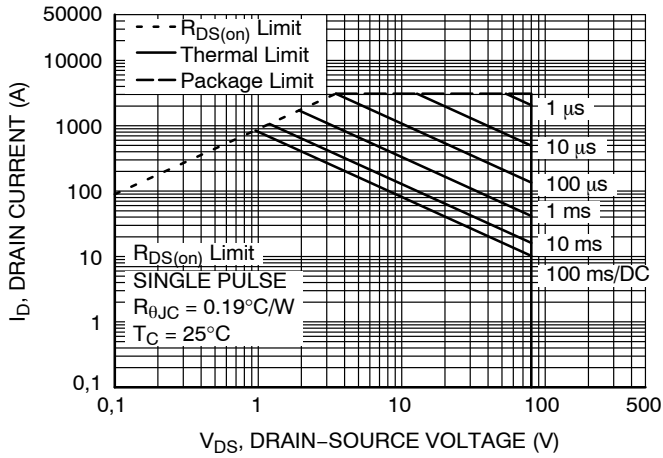


Figure 11. Safe Operating Area

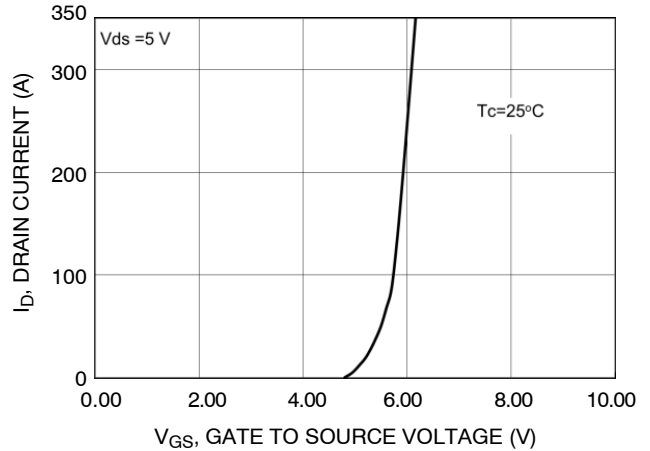


Figure 12. Transfer Characteristics


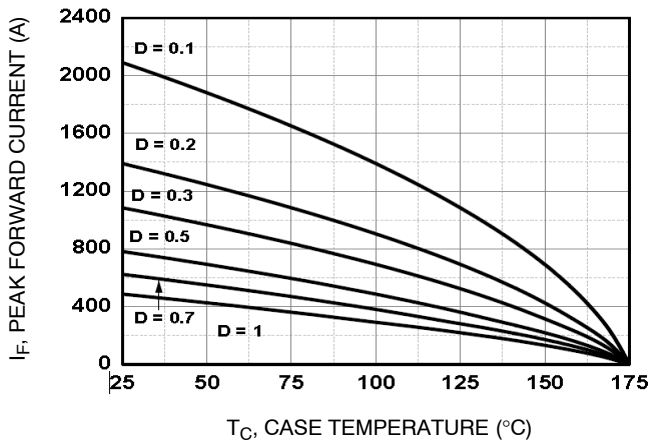


Figure 13. Body Diode Current

NXV08H400XT2

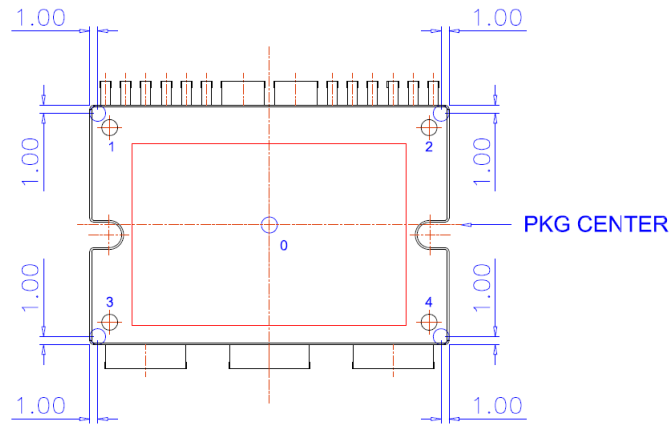

20
 FLATNESS : MAX. 150um
 - MEASURING AT INDICATING POINTS
 1, 2, 3, AND 4 (BASED ON "0")

Figure 14. Flatness Measurement Position

MECHANICAL CHARACTERISTICS AND RATINGS



Parameter	Test Conditions	Min	Typ	Max	Units
Device Flatness	Refer to the package dimensions	0	-	150	um
Mounting Torque	Mounting screw: M3, recommended 0.7 N•m	0.4	-	1.4 (Note 4)	N•m
Weight		-	21.2	-	g

4. Max Torque rating can be different by the type of screw, such as the screw head diameter, use or without use of Washer. In case of special screw mounting method is applied, contact to ON Semiconductor for the proper information of mounding condition.

NXV08H400XT2

PACKAGE DIMENSIONS

APM17-MDA AUTOMOTIVE MODULE CASE MODHU ISSUE C

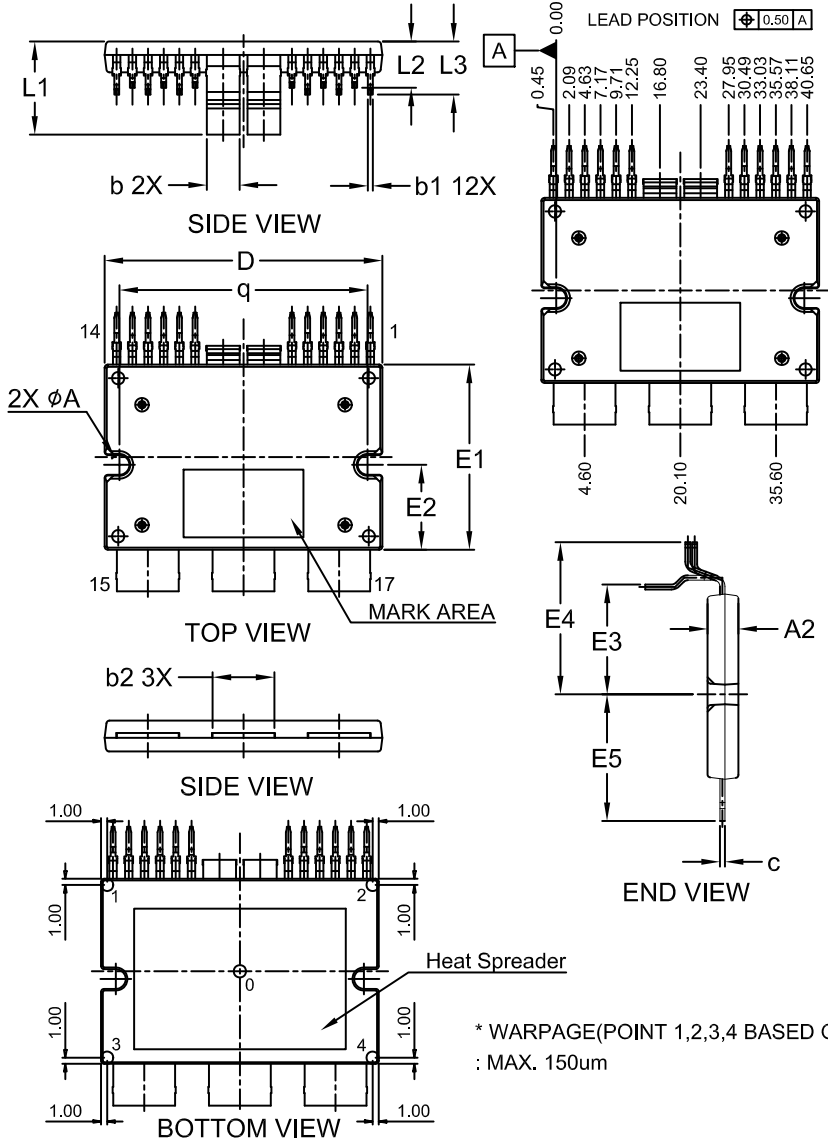

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.

MILLIMETERS			
DIM	MIN.	NOM.	MAX.
A2	4.90	5.00	5.10
b	5.20	5.30	5.40
b1	0.70	0.80	0.90
b2	9.90	10.00	10.10
c	0.75	0.80	0.90
D	44.90	45.00	45.10
E1	29.90	30.00	30.10
E2	13.65	13.75	13.85
E3	17.50	17.80	18.10
E4	24.35	24.65	24.95
E5	20.20	20.50	20.80
L1	14.80	15.10	15.40
L2	7.20	7.50	7.80
L3	8.30	8.60	8.90
q	40.10	40.20	40.30
φA	3.10	3.20	3.30

* WARPAGE (POINT 1,2,3,4 BASED ON 0)
: MAX. 150um

NXV08H400XT2

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:
Voice Mail: 1 800-282-9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative