


## Panasonic



# DZ RELAYS (ADZ)



Horizontal terminal type



Vertical terminal type

#### **FEATURES**


- 1. IEC62055-31 UC3 compliant (short current 3,000 A)
- 2. High switching capacity 120 A 250 VAC (Resistive load)
- 3. Twin contacts for low temperature
- 4. Low operating power 1 coil latching: 1.4 W
- 1 coil latching: 1.4 W 2 coil latching: 2.8 W
- 5. Small size: W: 41 x L: 35 x H: 22 mm W: 1.614 x L: 1.378 x H: .866 inch

## **TYPICAL APPLICATIONS**

- 1. Smart meters
- 2. Charge station
- 3. Other industrial equipment

Protective construction: Dust cover type

#### ORDERING INFORMATION

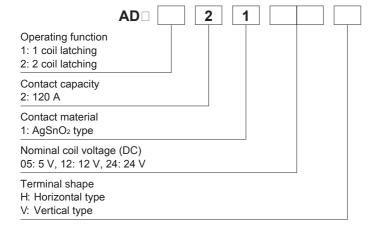

#### **TYPES**

Contact arrangement	Nominal coil voltage	Part No.					
		1 coil latching		2 coil latching			
		Horizontal terminal type	Vertical terminal type	Horizontal terminal type	Vertical terminal type		
	5 V DC	ADZ12105H	ADZ12105V	ADZ22105H	ADZ22105V		
1 Form A	12 V DC	ADZ12112H	ADZ12112V	ADZ22112H	ADZ22112V		
	24 V DC	ADZ12124H	ADZ12124V	ADZ22124H	ADZ22124V		

Standard packing: Carton: 20 pcs.; Case: 100 pcs.

ds\_61A11\_en\_dz: 010414J

## DZ (ADZ)

## **DISCONTINUED**

#### **RATING**

### 1. Coil data

#### 1) 1 coil latching

as of August 31, 2017

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
5 V DC	*70%V or less of	*70%V or less of	280.0 mA	17.9 Ω		
12 V DC	nominal voltage	nominal voltage (Initial)	116.7 mA	102.9 Ω	1,400 mW	130%V of nominal voltage
24 V DC	(Initial)		58.3 mA	411.4 Ω		

#### 2) 2 coil latching

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
5 V DC	*70%V or less of	*70%V or less of	560.0 mA	8.9 Ω		
12 V DC	nominal voltage	nominal voltage (Initial)	233.3 mA	51.4 Ω	2,800 mW	130%V of nominal voltage
24 V DC	(Initial)		116.7 mA	205.7 Ω		

<sup>\*</sup>Pulse drive (JIS C 5442-1996)

#### 2. Specifications

Characteristics		Item	Specifications		
Characteristics		nem	1 coil latching	2 coil latching	
	Arrangement		1 Form A		
Contact	Contact voltage drop		Max. 0.12V (at 120A), Max. 0.10V (at 20A)		
	Contact material		AgSnO₂ type		
	Nominal switching cap	pacity (resistive load)	120 A 250 V AC		
Rating	Max. switching power	(resistive load)	30,000 VA		
	Max. switching voltage	e	276 V AC		
	Max. switching curren	t	120 A	AC	
	Nominal operating pov	wer	1,400 mW (1 coil latching)	2,800 mW (2 coil latching)	
	Min. switching capacity (Reference value)*1		100 mA 24 V DC		
	Insulation resistance (Initial)		Min. 1,000 M $\Omega$ (at 500 V DC) Measurement at same location as "Breakdown voltage" section		
	Breakdown voltage (Initial)	Between open contacts	2,000 Vrms for 1min. (Detection current: 10 mA)		
		Between contact and coil	4,000 Vrms for 1min. (Detection current: 10 mA)		
Electrical characteristics	Overcurrent resistance (Initial)		Min. 3,000 A (Half-wave pulse of sine wave: 10 ms)*4		
0.10.10.01.01.00	Surge breakdown voltage*2 (Between contact and coil)		12,000 V (	(Initial)	
	Set time (at 20°C 68°F)		Max. 20 ms (Nominal voltage applied to the coil, excluding contact bounce time)		
	Reset time (at 20°C 68°F)		Max. 20 ms (Nominal voltage applied to the coil, excluding contact bounce time)		
	Shock resistance	Functional	300 m/s $^2$ (Half-wave pulse of sine wave: 11 ms; detection time: 10 $\mu$ s)		
Mechanical	SHOCK TESISTATICE	Destructive	1,000 m/s² (Half-wave pulse of sine wave: 6 ms)		
characteristics	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 1.5 mm (Detection time: 10 μs)		
		Destructive	10 to 55 Hz at double amplitude of 2.0 mm		
	Mechanical		Min. 10 <sup>5</sup> (at 180 times/min.)		
Expected life*3		Resistive load	120 A 250 V AC Min. 10 <sup>3</sup> (operating frequency: ON: OFF = 10 s: 20 s)		
	Electrical	UC3 class	100 A 276 V AC Min. 10 <sup>4</sup> (cosφ = 1.0 : 5,000, cosφ = 0.5 : 5,000, operating frequency: ON : OFF = 10 s : 20 :		
Conditions	Conditions for operation, transport and storage*3		Ambient temperature: -40°C to +85°C -40°F to +185°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)		
Unit weight			Approx. 75 g	2.65 oz	

#### Notes:

ds\_61A11\_en\_dz: 010414J

<sup>\*1.</sup> This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

\*2. Wave is standard shock voltage of ±1.2 × 50 µs according to JEC-212-1981

\*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to "6. Usage, Storage and Transport Conditions" in AMBIENT ENVIRONMENT section in Relay Technical Information.

\*4. IEC62055-31 UC3 compliant


\*5. Based on IEC62055-31 UC3, inductive load test was conducted after resistive load test, and expressed as total.


## **DIMENSIONS** (mm inch)

Download **CAD Data** from our Web site.

#### 1. Horizontal terminal type









General tolerance:  $\pm 0.3 \pm .012$ 


#### 2. Vertical terminal type














General tolerance:  $\pm 0.3 \pm .012$ 

### **SAFETY STANDARDS**

VDE (Certified)		
File No.	Contact rating	
40038931	120A 250V AC (cosφ=1.0)	

ds\_61A11\_en\_dz: 010414J 3

## DZ (ADZ)

## DISCONTINUED

as of August 31, 2017

#### NOTES

#### 1. For cautions for use, please read "GENERAL APPLICATION **GUIDELINES**".


#### 2. Operation, transport and storage

Following is the conditions of ambient temperature, humidity and air pressure in case of operation, transport and storage.

- 1) Ambient temperature: -40 to +85°C -40 to +185°F (Max.100A over 70°C 158°F)
- 2) Humidity: 5 to 85%RH (Not freezing and condensing)

In addition the humidity range depends on temperature.

The allowable ranges are as follows; 3) Air pressure: 86 to 106kPa Allowable range of ambient temperature and humidity for operation, transport and storage.



#### 4) Condensing

Condensing occurs when the relay is exposed to sudden temperature change in a high-temperature, high-humidity atmosphere. This may cause some troubles like insulation failure.

5) Freezing

At temperature below 0°C 32°F, moisture may freeze. This may lead to some troubles like sticking of the moving portion of the relay or delayed operation. 6) Low-temperature, low-humidity atmosphere

If the relay is exposed to a lowtemperature, low-humidity atmosphere for a long time, its plastic parts may become brittle and fragile.

#### 3. Soldering and cleaning

1) In case of soldering, following conditions should be observed. Manual soldering:

Max. 260°C 500°F (solder temperature) within 10s (soldering time)

Max. 350°C 662°F (solder temperature) within 3s (soldering time)

- \* Furthermore, because the type of PC board used and other factors may influence the relays, test that the relays function properly on the actual PC board on which they are mounted.
- 2) Since this is not a sealed type relay, do not clean it as is. Also, be careful not to allow flux to overflow above the PC board or enter the inside of the relay.

## 4. Terminal installation condition

Installation torque for contact terminal (M4): 1.2 to 1.4 N·m

#### 5. Cautions for use

- 1) This relay is designed to dust cover type. Malfunction and contact failure may result if small insects get inside the relay. 2) Installation of M4 securing screw for
- contact terminal

Do not apply excessive pressure on the terminals. This could adversely affect relay performance. Use a washer in order to prevent deformation.

Keep the installation torque to within 1.2 to 1.4 N·m (12 to 14 kgf·cm).

Also, use a spring washer to prevent it from loosening.

3) Through hole on the relay is for temporary fixing use. Do not fix relay through hole only.

## For Cautions for Use, see Relay Technical Information.