


Product description **M23 male cable connector, Contacts: 6, 6.0 - 10.0 mm, solder, IP67**
 Area **M23 series 623**
 Order number **99 4635 00 06**


Illustration



Scale drawing

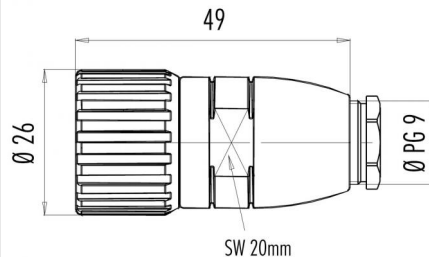

Contact arrangement (Plug-in side)



| | X | Y |
|---|-------|-------|
| 1 | 4,13 | 2,38 |
| 2 | 4,13 | -2,38 |
| 3 | 0,00 | -4,75 |
| 4 | -4,13 | -2,38 |
| 5 | -4,13 | 2,38 |
| 6 | 0,00 | 0,00 |

You can find the assembly instructions on the next page.

Technical data

General features

Order number 99 4635 00 06
 Connector design male cable connector
 Version connector male straight
 Connector locking system screw
 Termination solder
 Degree of protection IP67
 Arrangement of contacts clockwise
 Cross-sectional area 2.50 mm² / AWG 14
 Cable outlet 6.0 - 10.0 mm
 Temperature range from/to -25 °C / 125 °C
 Mechanical operation > 50 Mating cycles
 Weight (g) 81
 Customs tariff number 85369010

Electrical parameters

Rated voltage 300 V
 Rated impulse voltage 2500 V
 Rated current (40 °C) 20 A
 Insulation resistance $\geq 10^{10} \Omega$
 Pollution degree 3
 Overvoltage category II
 Insulating material group III


Material

Contact body material PBT/PA66
 Contact material CuZn (brass)
 Contact plating Au (gold)
 REACH SVHC CAS 7439-92-1 (Lead)

Product description M23 male cable connector, Contacts: 6, 6.0 - 10.0 mm, solder, IP67

Area M23 series 623
Order number 99 4635 00 06

Assembly instructions / Panel cut-out

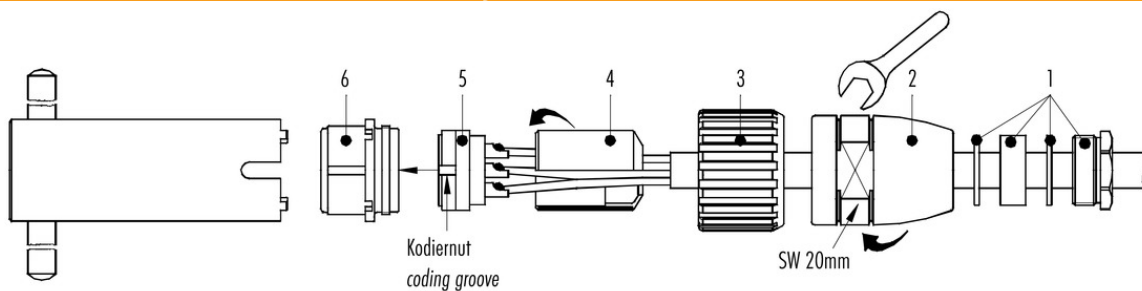

- Push the cable screw connection (1), adapter (2) and coupling nut (3) onto the cable.
- Strip the cable coating by 20 mm.
- Trim foil, filler and inner insulation.
- Strip the single wires by 3.5 mm, twist and tin.
- Solder the single wires to the contacts.
- Insert the distance shell (4).
- Guide the insert (5) and distance shell (4) into the insert ring (6), mind that the desired coding groove of the insert (6) is pushed into the coding bar.

- Screw the adapter (2) as tight as possible.
- Screw the cable gland (1) as tight as possible.

Please note: torque for clamping screw for contact insert (5) with screw contacts:

- max. 0.1 Nm for screw contacts with mating dia. 1 mm
- max. 0.2 Nm for screw contacts with mating dia. 2 mm

| | |
|---------------------|--|
| Product description | M23 male cable connector, Contacts: 6, 6.0 - 10.0 mm, solder, IP67 |
| Area | M23 series 623 |
| Order number | 99 4635 00 06 |

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre. To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).