



## Features

- 80 W convection-cooled rating
- Small 5 x 3 x 1.07 inches form factor
- High efficiency > 85%
- Class A harmonic current correction
- EN55022–B, FCC Part15 Level B
- Cover kit accessory available

## Electrical Specifications

AC Input	90–264 V, Universal	
Input Frequency	47–63 Hz	
Input Current	120 VAC: 1.7 A max.	230 VAC: 0.9 A max.
Inrush Current	120 VAC: 17 A max.	230 VAC: 35 A max.
Leakage Current	120 VAC: < 500 $\mu$ A	230 VAC: < 1000 $\mu$ A
Efficiency <sup>1</sup>	120 VAC: 85% typical	230 VAC: 87% typical
Hold-up Time	120 VAC: 10 ms	230 VAC: 16 ms
Output Power	60 to 80 W	
Line Regulation	+/-0.3%	
Load Regulation	V1: +/-1%; V2, V3 and V4: +/-5%	
Transient Response	< 10%, 50% to 100% load change, 50/60 Hz, 50% duty cycle, 0.1 A/ $\mu$ s, recovery time < 5 ms	
Rise Time	< 40 ms	
Set Point Tolerance	V1: +/-3%; V2, V3 & V4: +/-5%	
Over Current Protection	110 to 160%	
Over Voltage Protection (For V1 & quad output model only)	4.1 +/-0.2 V for 3.3 V; 6.4 +/-0.4 V for 5 V	
Short Circuit Protection	Short term, autorecovery	
Switching Frequency	Boost converter: 60 kHz typical Resonant converter: 45 kHz typical	
Operating Temperature	0 to 70°C, refer derating curve	
Storage Temperature	-40 to +70°C	
Relative Humidity	95% Rh, noncondensing	
Altitude	Operating: 10,000 ft.; Nonoperating: 40,000 ft.	
MTBF	3.71m Hours, Telcordia SR332 Issue-3	
Isolation Voltage	Min. 4242 VDC between input to output	
Cooling	Convection	

Model Number	Voltage	Max. Load <sup>2</sup>	Min. Load	Ripple <sup>3</sup>
LFVLT80-1000	V1=5.1 V	12.0 A	1.0 A	1%
LFVLT80-1001	V1=12 V	6.8 A	0.4 A	1%
LFVLT80-1002	V1=15 V	5.5 A	0.4 A	1%
LFVLT80-1003	V1=24 V	3.4 A	0.2 A	1%
LFVLT80-1008	V1=36 V	2.2 A	0.2 A	1%
LFVLT80-1004	V1=48 V	1.7 A	0.2 A	1%
LFVLT80-4000	V1=5.1 V, V2=12.4 V, V3=-5.1 V, V4=-12.5 V	V1=10.0 A, V2=3.0 A, V3=0.8 A, V4=0.8 A	V1=1.0 A, V2=0.1 A, V3=0.0 A, V4=0.0 A	1%
LFVLT80-4001	V1=5.1 V, V2=23.5 V, V3=12.5 V, V4=-12.5 V	V1=10.0 A, V2=2.0 A, V3=0.8 A, V4=0.8 A	V1=1.0 A, V2=0.1 A, V3=0.0 A, V4=0.0 A	1%
LFVLT80-4002	V1=5.1 V, V2=16 V, V3=-5.1 V, V4=-16 V	V1=10.0 A, V2=3.0 A, V3=0.8 A, V4=0.8 A	V1=1.0 A, V2=0.1 A, V3=0.0 A, V4=0.0 A	1%
LFVLT80-4003	V1=5.1 V, V2=12.4 V, V3=24 V, V4=-12.5 V	V1=10.0A, V2=3.0 A, V3=0.8 A, V4=0.8 A	V1=1.0 A, V2=0.1 A, V3=0.0 A, V4=0.0 A	1%
LFVLT80-4004	V1=3.3 V, V2=5.1 V, V3=12.5 V, V4=-12.5 V	V1=10.0 A, V2=3.0 A, V3=0.8 A, V4=0.8 A	V1=1.0 A, V2=0.1 A, V3=0.0 A, V4=0.0 A	V1=1.5% V2, V3 & V4=1%
LFVLT80-CK metal cover kit accessory				

Connectors		
J1	Pin 1	AC NEUTRAL
	Pin 2	AC LINE
Spade Connector		EARTH
J2	Pin 1, 2, 3, 4	V1
	Pin 5, 6, 7, 8	RTN
	Pin 9, 10	V2
	Pin 11	V3
	Pin 12	V4
J3	Pin 1	RTN
	Pin 2	POWER FAIL/GOOD

## Notes


1. For VLT80-4004 efficiency is 80% typical.
2. Maximum current per output channel. Do not exceed total output power rating.
3. Ripple is peak to peak with 20 MHz bandwidth and 10  $\mu$ F (Tantalum capacitor) in parallel with a 0.1  $\mu$ F capacitor at rated line voltage and load ranges.
4. Power fail and power good signal on quad output models only.
5. Specifications are for nominal input voltage, 25°C and max. load unless otherwise stated.
6. Derate output power linearly to 80% from 90 VAC to 80 VAC input.




Innovations in Power

## Mechanical Specifications

AC Input Connector (J1)	Molex: 26-60-4030 or equivalent Mating: 09-50-3031; Pins: 08-50-0106
EARTH	Molex: 19705-4301 Mating: 190030001
DC Output Connector (J2)	Tyco: 1-640445-2 or equivalent Mating: 1-647402-2; Pins: 3-647409-1
Signal Connector (J3)	Molex: 22-23-2021 or equivalent Mating: 22-01-2021
Dimensions	5.0 x 3.04 x 1.07 inches (127.0 x 77.22 x 27.18 mm)
Weight	250 g
<b>EMC</b>	
CE Mark	Complies with LVD Directive
Conducted Emissions	EN55022-B, CISPR22-B, FCC PART15-B
Static Discharge	EN61000-4-2, Level-3
RF Field Susceptibility	EN61000-4-3, Level-3
Fast Transients/Bursts	EN61000-4-4, Level-3
Radiated Emissions	EN55022-B, CISPR22-B, FCC PART15-B To be controlled in end system
Surge Susceptibility	EN61000-4-5, Level-3
<b>Safety</b>	
Safety Standard(s)	IEC60950-1 (ed. 2), EN60950-1, UL60950-1 (2nd Edition), CSA C22.2 No. 60950-1 (2nd Edition), Class 1 SELV
Approval Agency	Nemko, UL, C-UL
Safety File Number(s)	Nemko: P09210934 UL: E150565
<b>Signal</b>	
Power Fail/Good Signal <sup>4</sup>	Signal goes high after main output is within regulation band, delay is 100 ms. Signal goes low 1 ms advance before output goes out of regulation due to mains failure

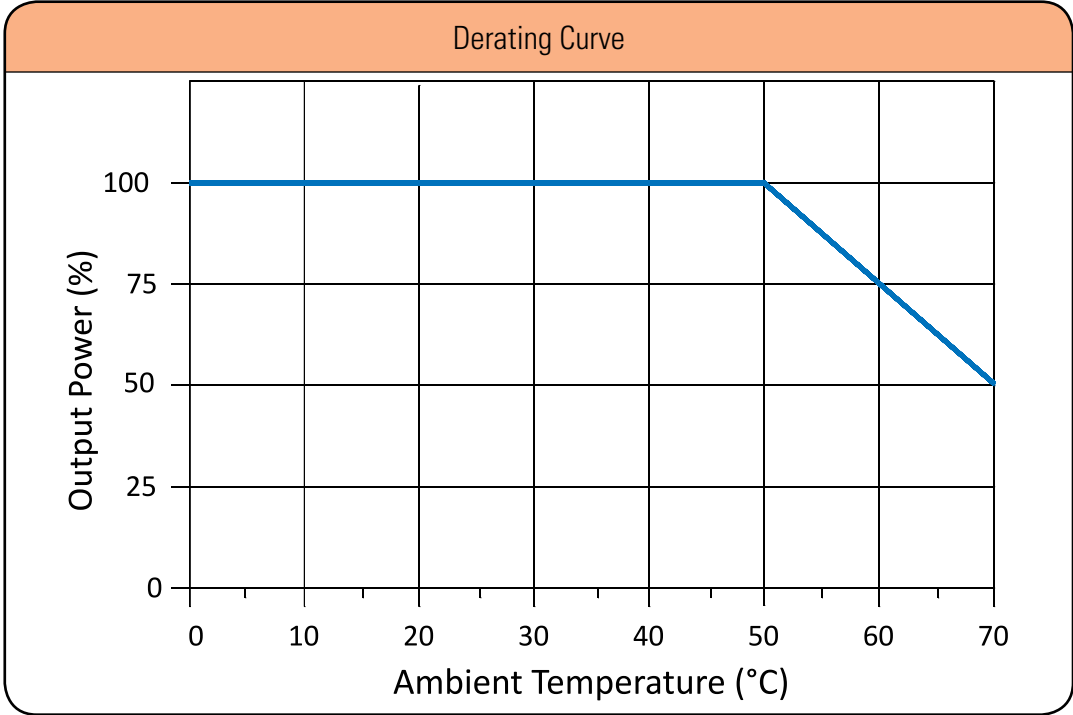

### Mechanical Drawing

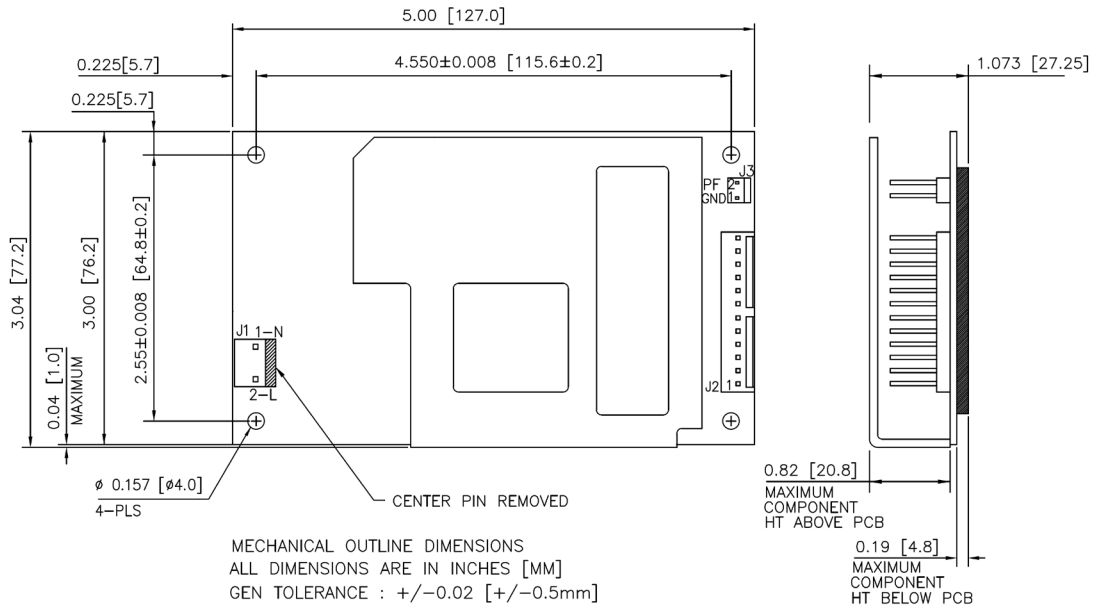

- Notes: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following
1. Stand off, used to mount PCB has OD of 5.4 mm max.
  2. Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
  3. Washer, if used, to have dia of 6.5 mm max.



Innovations in Power