XLR Cable Connectors	Miniature Circular Connectors
with On-Off Switch with Locking Ring	Profi® (RCA Plugs)
XLR Receptacles	Patch Cables (TT & TB plugs)
Solder PCB Mount	"EasyPatch" audio patch panels
IDC	
	<b>Accessories</b>
<b>Jacks and Plugs</b>	XLR Adapters & Modules
1/4" plugs - mono & stereo	Goosenecks, Transformers, Wallplates
TT & TB plugs and jacks	AES/EBU Adapters
Vertical PCB and Panel Mount 1/4" jacks	
	XLR & Color Coded Accessories39
<b>XLR Combo</b>	BSP, BSX, BSTP, BSZ, DSS, PCR, XCR
	SCDF, SCDM
Speakon®	DBA
2, 4, or 8 pole cable ends	
PCB mount, Solder or Screw Terminal Receptacles Adapters: Speakon to 1/4" and Cable extenders	Contact Arrangements
	<b>Neutrik Part # Guide</b>
<b>PowerCon</b> ®	
Input	Indexes
Output	by Part
Cable extender	by Series

New Products Added to this Catalog
Digital XLR
Easycon
<b>4 &amp; 5 pin A/B Series</b>
Speakon®
Easy Patch – NPPA Series TT patch panels
Color Coded Accessories

# Where to obtain Technical Information

**Spec Drawings:** Dimensional drawings in .pdf and .dxf formats are available on the web – www.neutrik.com in the PRODUCTS section.

Assembly Instructions: Available on the web – www.neutrik.com – in the TECHNICAL SUPPORT section. All files are .pdf.

**FAQs** – Available on the web – www.neutrikusa.com – in the FAQ section.

In person technical support for US customers – 732-901-9488 or info@neutrikusa.com.

In person technical support outside of the US – contact Neutrik AG – neutrik@neutrik.com - for the Neutrik sister company or agent nearest to you.



# X Series

This series has become the accepted worldwide standard for XLR cable connectors. The compact design offers the shortest XLR cable version in the industry. The female features an insert which is completely surrounded by metal for added protection and the shell has a rubber ring for secure mating to a male XLR or microphone. Assembly is quick and easy with no screws to worry about and includes the unique NEUTRIK® chuck type strain relief. Accessories include BSX boots and XCR labeling rings for color coding identification (see page 39).

ORDE	RING INFORM	ATION - "X"	Series Male
# of	Nickel Shell	Black Chro	ome Shell
Contacts	Silver Contacts	Silver Contacts	Gold Contacts
3	NC3MX	NC3MX-BAG	NC3MX-B
3**	NC3MX-D	NC3MX-BAG-D	NC3MX-B-D
4	NC4MX	NC4MX-BAG	NC4MX-B
5	NC5MX	NC5MX-BAG	NC5MX-B
6	NC6MX	NC6MX-BAG	NC6MX-B
6*	NC6MXS	NC6MXS-BAG	NC6MXS-B
7	NC7MX	NC7MX-BAG	NC7MX-B

ORDEF	RING INFORMA	ATION - "X" S	Series Female
# of Contacts	Nickel Shell Silver Contacts	Black Chr Silver Contacts	ome Shell Gold Contacts
3	NC3FX	NC3FX-BAG	NC3FX-B
3**	NC3FX-D	NC3FX-BAG-D	NC3FX-B-D
4	NC4FX	NC4FX-BAG	NC4FX-B
5	NC5FX	NC5FX-BAG	NC5FX-B
6	NC6FX	NC6FX-BAG	NC6FX-B
6*	NC6FXS	NC6FXS-BAG	NC6FXS-B
7	NC7FX	NC7FX-BAG	NC7FX-B

<sup>\*\*</sup>Bulk packaged available in 3 pin version only. Must be ordered in multiples of 100
\*Switchcraft° equivalent



# X-1 and X-14 Series

A more economical version of the standard "X" series connectors, the X-1 series has a one piece plastic boot and is only available in 3 pin configurations.

The X-14 series is also only available in 3 pin configurations and features a chuck that can accommodate cable diameters up to 9.7mm. Both the X-1 and the X-14 series can use the XCR rings for color coding (see page 39).

ORDE	RING INFORM	ATION - "X-1" Series Male
# of	Nickel Shell	Black Chrome Shell
Contacts		Silver Contacts
3	NC3MX-1	NC3MX-1-BAG
3**	NC3MX-1-D	NC3MX-1-BAG-D

ORDERI	NG INFORMA	ATION - "X-1"	Series Female
# of	Nickel Shell		Black Chrome Shell
Contacts		Silver Contacts	
3	NC3FX-1		NC3FX-1-BAG
3**	NC3FX-1-D		NC3FX-1-BAG-D
		22	

\*\*Must be ordered in multiples of 100
Special orders may be available - contact Neutrik USA, Inc.® for details

ORDE	RING INFORMA	ATION - "X-14" Series Male
# of	Nickel Shell	Black Chrome Shell
Contacts		Silver Contacts
3	NC3MX-14	NC3MX-14-B

ORDER	ING INFORMA	TION - "X-14"	Series	Female
# of	Nickel Shell		Black Ch	rome Shell
Contacts		Silver Contacts		
3	NC3FX-14		NC3FX-14	I-B
A !   -   -   -   -   -	la de al la el Marcak la el cada	:		

Available bulk packed. Must be ordered in multiples of 100 Contact Neutrik USA. Inc.® for details.




# RC Series

These compact, low profile, right angle cable connectors are designed to select any of 7x45° positions by rotating the assembled insert into various indents before securing back cover.

ORDERING INFORMATION - "RC" Series Male			
# of			
Contacts	Silver Contacts	Silver Contacts	Gold Contacts
3	NC3MRC	NC3MRC-BAG	NC3MRC-B
4	NC4MRC	NC4MRC-BAG	NC4MRC-B
5	NC5MRC	NC5MRC-BAG	NC5MRC-B
6	NC6MRC	NC6MRC-BAG	NC6MRC-B
6*	NC6MRCS	NC6MRCS-BAG	NC6MRCS-B
7	NC7MRC	NC7MRC-BAG	NC7MRC-B

ORDER	ING INFORMA	TION - "RC"	Series Female
# of Contacts	Nickel Shell Silver Contacts	Black Chr Silver Contacts	
3	NC3FRC	NC3FRC-BAG	NC3FRC-B
4	NC4FRC	NC4FRC-BAG	NC4FRC-B
5	NC5FRC	NC5FRC-BAG	NC5FRC-B
6	NC6FRC	NC6FRC-BAG	NC6FRC-B
6*	NC6FRCS	NC6FRCS-BAG	NC6FRCS-B
7	NC7FRC	NC7FRC-BAG	NC7FRC-B
*Switchcraft®	equivalent		






# Digital XLR

The Digital XLR is a 3-pole connector that allows the transmission of digital audio signals, according to AES3, efficiently and reliably. Features include a coaxial ground spring and coaxial hex crimp ferrule at the cable entrance for accurate and reliable transition of the shield to the shell. The XCC series provides continuous (360°) ground connection of the cable shield to the shell, which is essential when transmitting digital audio signals.

Additionally excellent screening is provided up to 1.3GHz of min-55dB (50 times better) and is especially suited for coverage of the frequency range of mobile phones (see graph below).

OR	DERING IN	IFORMATION	– Digital XLR	
# of		Nickel Shell		
Contacts		Gold Contacts		
	Male		Female	
3	NC3MXCC		NC3FXCC	
Crimp: HX-BNC ro M225201/5 01 Die: DIF-RNC-PG (6.5 mm hex)				

Available in 4-7 pin configurations (including Switchcraft® 6 pin configurations) as special order. Minimum order required. Contact Neutrik USA, Inc.® for details.

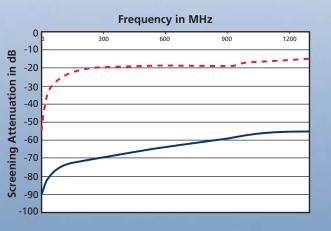

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com



# **FX-SPEC** Series

This connector offers a locking ring for the highest security protection of your microphones on the market today. Just twist the ring into place and tighten the allen M2.5 screw with a 1.27mm wrench for passive theft protection. The locking ring also protects against accidental disconnects.

ORDI	ERING INFORMATION - "FX-SPEC" Series
# of	Black Chrome Shell
Contacts	Silver Contacts
3	NC3FX-SPEC



# FX-S Series

The FX-S series offers a noiseless ON/OFF switch which shorts pins 2 and 3 muting the signal voltage between conductors. Gold contacts are standard.

ORDE	RING INFORM <i>A</i>	TION - "FX-S" Series Male
# of	Nickel Shell	Black Chrome Shell
Contacts		Gold Contacts
3	NC3FX-S	NC3FX-S-B
	INCOLN D	Nesi X 5 B



# X-HD Series

These heavy duty cable connectors were made for outdoor, high traffic, or industrial applications. The male shell is stainless steel and the female is covered in neoprene with a sealing lip to mate securely. Gold contacts, which offer superb abrasion resistance, are standard. The two piece metal boot contains a rubber "O" ring which prevents elements from entering the shell. The X-HD series is dust proof, water and corrosion resistant according to IEC-144:IP55 when mated together or IEC-144:IP54 when mated with others.

ORDER	ING INFORM	ATION - "X-HD"	Series Male		
# of	Stainless Steel Shell				
Contacts	Gold Contacts				
3	NC3MX-HD		NC3MX-HD-R*		

<sup>\* -</sup>B version has black boot only (male shell is not black)

ORDERI	NG INFORMAT	ION -	"X-HD"	Series	Female
# of	Neoprene Co	vered Sh	ell with Gol	d Contacts	
Contacts	Nickel Shell			Black Chr	ome Shell
3	NC3EX-HD			NC3EX-HD	)-R

Male and Female connectors available in 4-7 pin configuration including 6 pin Switchcraft° equivalent.

Contact Neutrik USA, Inc.® for ordering information.









# Easycon Series

## "NEUTRIK® redefines the future of XLR Cable Connectors"

NEUTRIK once again takes the lead in offering innovative designs for audio connector applications. Available with either IDC or solder contacts, Easycon® is made of only three pieces. There is no set screw or additional parts to drop or lose. We believe that these connectors are the fastest way to terminate a cable with an XLR - allowing the user to reduce assembly time by as much as 60%.

Easycon® gold-plated (TRIBOR®), polished, self cleaning "tuning-fork" IDC or solder contacts (patents granted and pending) extend lifetime mating cycles allowing easy and reliable connections every time. The solderless shield connection is direct to Pin 1. A drain wire connection is also included.

The self-adjusting cam lock cable clamp (patent granted US 6 783 804) accepts a wide range of cable diameters (5.5mm - 7.0mm) and provides increased retention force under tensile stress.

Use the BSZ boots for easy color coding identification (see page 39).

ORDERING	INFORMATION - I	EASYCON – IDC-Mal
# of	Nickel Shell/	Black Chrome/
Contacts	Gold Contacts	Gold Contacts
3	NC3ME7Y-ALI	NC3ME7V-R

ORDERING	INFORMATION - EA	ASYCON – IDC-Femal
# of	Nickel Shell/	Black Chrome/
Contacts	Gold Contacts	Gold Contacts
3	NC3FEZY-AU	NC3FEZY-B

ORDERING	<b>INFORMATION - EAS</b>	YCON – Solder-Male
# of	Nickel Shell/	Black Chrome/
Contacts	Gold Contacts	Gold Contacts
3	NC3MF7-AII	NC3MF7-R

ORDERING INFORMATION – EASYCON – Solder-Female							
# of	Nickel Shell/	Black Chrome/					
Contacts	Gold Contacts	Gold Contacts					
3	NC3FF7-AU	NC3FF7-B					

All Easycon is available bulk packed. Add "-D" as suffix when ordering. Must be ordered in multiples of 100. Contact Neutrik USA, Inc.® for details.

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

 $oldsymbol{a}$ 

	"X" Series	"X-1" Series	"X-14" Series	"RC" Series	"X-HD" Series
Electrical					
Number of contacts: 3-7	Х	3 only	3 only	Х	Х
Rated current: See table below	Х	X	Х	Х	Χ
Contact resistance: $<3 \text{ m}\Omega$	Χ	X	Χ	Χ	Χ
Insulation resistance:					
• initial: >2GΩ	Χ	Χ	Χ	Χ	Χ
• after damp heat test: $>1$ G $\Omega$	Χ	Χ	Χ	Χ	Χ
Dielectric strength: 1500 V dc	X	X	X	Χ	X
Mechanical					
Insertion / withdrawal force: ≤20N	Χ	Χ	Х	Χ	Χ
Max. wire size: See table below	Χ	Χ	Χ	Χ	Χ
Cable O.D. range: 3.5 mm - 8.0 mm	X	4 mm - 7 mm	4 mm - 9.7 mm	4 mm - 7 mm	X
Environmental					
Temperature range: -30°C to +80°C	Χ	X	X	Χ	Χ
Flammability: UL 94HB	Χ	Χ	X	Χ	Χ
Solderability: Complies with IEC 68-2-20	Χ	X	X	Χ	Χ
Protection class:	N/A	N/A	N/A	N/A	IP 65
Materials					
Shell: ZnAl4Cu1, gal Ni or black chrome over	Cu plating X	Χ	Х	Χ	Χ
Insert: PA 6.6 30% GR (glass reinforced)	X	Χ	Χ	Χ	Χ
Locking ring: ZnAl4Cu1, gal Ni or black chrome over Cu plating	N/A	N/A	N/A	N/A	N/A
Contacts:					
• female (3 pole) CuSn6	Χ	Χ	Χ	Χ	Χ
• female (4-7 pole) & male CuZn39Pb3	Χ	Χ	Χ	Χ	Χ
Contact surface: gal 0.2 µm Au hard alloy over 2 µm Ni	-B versions only	N/A	N/A	-B versions only	Х
Latch lock: St3K32 (latch)/Ck 67 (spring)	Х	Х	Χ	Х	Х
Strain relief clamp: POM	Х	Χ	Χ	Χ	Χ
Antikink boot: PUR	Х	Х	Χ	Х	Х

XLR Rated Current						
I [A]	{mm²/AWG}	C[pF]				
16	2.5/14	≤ 4				
10	1.5/16	≤ 7				
7.5	1.0/18	≤ 7				
7.5	1.0/18	≤ 7				
5	1.0/18	≤9				
	I [A] 16 10 7.5	I [A]     {mm²/AWG}       16     2.5/14       10     1.5/16       7.5     1.0/18       7.5     1.0/18	I [A]     {mm²/AWG}     C[pF]       16 $2.5/14$ $\leq 4$ 10 $1.5/16$ $\leq 7$ 7.5 $1.0/18$ $\leq 7$ 7.5 $1.0/18$ $\leq 7$			

	Digital XLR	"FX-SPEC Series"	"EasyCon Series"	"FXS" Series
Electrical				
Number of contacts: 3-7	3 only	3 only	3 only	3 only
Rated current: See table below	Χ	X	6A	Χ
Contact resistance: $<3 \text{ m}\Omega$	Х	Χ	≤ 6mΩ	Х
Insulation resistance:				
• initial: >2GΩ	Х	Χ	Χ	Χ
• after damp heat test: $>1$ G $\Omega$	Χ	Χ	Χ	Χ
Dielectric strength: 1500 V dc	Х	X	Χ	X
Mechanical				
Insertion / withdrawal force: ≤20N	Х	Χ	Χ	Х
Max. wire size: See table on previous page	Χ	Χ	AWG 26-22	Χ
Cable O.D. range: 3.5 mm - 8.0 mm	X	X	5.5 - 7.0 mm	Χ
Environmental				
Temperature range: -30°C to +80°C	Χ	Χ	Χ	X
Flammability: UL 94HB	Χ	Χ	N/A	X
Solderability: Complies with IEC 68-2-20	X	X	Χ	X
Protection class:	N/A	N/A	N/A	N/A
Materials				
Shell: ZnAl4Cu1, black chrome over Cu plating	X N/A	N/A X	X	Χ
Insert: PA 6.6 30% GR (glass reinforced)	Χ	Χ	Χ	Χ
Locking ring: ZnAl4Cu1, gal Ni or black chrome over Cu plating	N/A	X	N/A	N/A
Contacts:				
• female (3 pole) CuSn6	Χ	Χ	Χ	Χ
• female (4-7) pole & male CuZn39Pb3	Χ	N/A	CuZn36Pb1.5	N/A
Contact surface: gal 0.2 µm Au hard alloy over 2 µm Ni	X	N/A	gal 0.1µm AuCo over 2µmNiP15(Tribor®)	Х
Latch lock: St3K32 (latch)/Ck 67 (spring)	Х	Χ	N/A	Х
Strain relief clamp: POM	Ni/Su	Χ	Χ	X
Antikink boot: PUR	Χ	X	Pu/EPDM	Х

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com





# A/B Series

The A/B series of XLR receptacles offer a variety of standard features including hard gold contacts. They are the smallest receptacles on the market today and when mounted side by side are only 0.90" center to center. These receptacles are also extremely cost effective, are available in 3, 4 & 5 pin configurations and a revolutionary tuning fork contact design is standard on the females.

The "A" series is made of high impact glass reinforced UL94V-0 plastic. The "B" series features a metal (nickel or

black chrome) mounting flange, which enables continuous circumferential chassis ground contact for complete EMC and RF protection.

The 3 pin male "A" series offers either a ground contact which is connected through the chassis mounting hole to reduce EMC interference or you can order without the ground contact. See the ordering information below for correct part #s.

ORDERING INFORMATION – "A/B" Series Male – 3 PIN						
Gold Contacts Termination	Plastic Shell with ground	Plastic Shell without ground	Shell w/Ni Ring	Shell w/Blk Cr Ring		
PCB Mount Horizontal	NC3MAH	NC3MAH-0	NC3MBH	NC3MBH-B		
PCB Mount Horizontal Lateral Right	NC3MAHR	N/A	NC3MBHR	NC3MBHR-B		
PCB Mount Horizontal Lateral Left	NC3MAHL	N/A	NC3MBHL	NC3MBHL-B		
PCB Mount Vertical	NC3MAV	NC3MAV-0	NC3MBV	NC3MBV-B		
IDC	NC3MAY	N/A	NC3MBY	NC3MBY-B		

Special version of "B" series available w/ additional ground contacts, add "-E" as suffix. Contact Neutrik USA, Inc.® for details. Minimums may be required.

ORDERING INFORMATION - "A/B" Series Female - 3 PIN						
<b>Gold Contacts Termination</b>	Plastic Shell	Shell w/Ni Ring	Shell w/Blk Cr Ring	Ground		
PCB Mount Horizontal	NC3FAH*	N/A	N/A	No special ground feature		
	NC3FAH-1*	NC3FBH-1*	NC3FBH-1-B	Pin one & chassis ground together		
	NC3FAH-2*	NC3FBH-2*	NC3FBH-2-B	Pin one & chassis ground separate		
PCB Mount Horizontal	NC3FAHR-1*	NC3FBHR-1*	NC3FBHR-1-B	Pin one & chassis ground together		
Lateral Right	NC3FAHR-2*	NC3FBHR-2*	NC3FBHR-2-B	Pin one & chassis ground separate		
PCB Mount Horizontal	NC3FAHL-1*	NC3FBHL-1*	NC3FBHL-1-B	Pin one & chassis ground together		
Lateral Left	N/A	N/A	N/A	Pin one & chassis ground separate		
PCB Mount Vertical	NC3FAV*	N/A	N/A	No ground feature		
	NC3FAV-1*	NC3FBV-1*	NC3FBV-1-B	Pin one & chassis ground together		
	NC3FAV-2*	NC3FBV-2*	NC3FBV-2-B	Pin one & chassis ground separate		
IDC	NC3FAY*	NC3FBY	NC3FBY-B	No special ground feature		

\*W/ retention spring instead of "push" tab add, "-O" as suffix ie. NC3FAH-1-O

# **Mounting Screws**

3 pin A Series use part # Screw-2.9m 3 pin B Series use part # Screw-2.5m

732-901-9488







# A/B Series

The 3 pin female receptacles are currently available in horizontal and vertical PCB mount terminations and offer three grounding options – no ground, pin 1 and chassis ground together, or pin 1 and chassis ground separate. The horizontal PCB mount versions of the male and the female are also available in lateral right or left pin outs. The 3 pin male and female receptacles are also offered in an IDC version.

The new 4 & 5 pin versions are recommended for DMX and lighting applications and are available in horizontal or

vertical PCB mount. The grounding feature for the 4 & 5 pin females is pin 1 and chassis ground separate. Additional grounding and latchless versions of the females may be available as special orders. Please call Neutrik USA, Inc.® for details.

Color coded identification rings are available - use part #s ACRF-color and ACRM-color (see page 39). These rings are available in 9 of the resistor colors (no black) and can be used on both the "A" and the "B" series.

ORDERING INFORMATION - "A/B" Series Male - 4 PIN				
Gold contacts Termination	Plastic Shell	Shell w/Ni Ring	Shell w/Blk Cr Ring	
PCB Mount Horizontal	NC4MAH	NC4MBH	NC4MBH-B	
PCB Mount Vertical	NC4MAV	NC4MBV	NC4MBV-B	

ORDERING INFORMATION - "A/B" Series Female - 4 PIN				
<b>Gold contacts Termination</b>	Plastic Shell	Shell w/Ni Ring	Shell w/Blk Cr Ring	Ground
PCB Mount Horizontal	NC4FAH	NC4FBH	NC4FBH-B	Pin one & chassis ground separate
PCB Mount Vertical	NC4FAV	NC4FBV	NC4FBV-B	Pin one & chassis ground separate

latchless (retention spring instead of PUSH tab) versions of females may be available as special order - add "-0" as suffix when ordering. Contact Neutrik USA, Inc.® for details.

ORDERING INFORMATION - "A/B" Series Male - 5 PIN				
Gold contacts Termination	Plastic Shell	Shell w/Ni Ring	Shell w/Blk Cr Ring	
PCB Mount Horizontal	NC5MAH	NC5MBH	NC5MBH-B	
PCB Mount Vertical	NC5MAV	NC5MBV	NC5MBV-B	

ORDERING INFORMATION - "A/B" Series Female - 5 PIN				
Gold contacts Termination	Plastic Shell	Shell w/Ni Ring	Shell w/Blk Cr Ring	Ground
PCB Mount Horizontal	NC5FAH	NC5FBH	NC5FBH-B	Pin one & chassis ground separate
PCB Mount Vertical	NC5FAV	NC5FBV	NC5FBV-B	Pin one & chassis ground separate

latchless (retention spring instead of PUSH tab) versions of females may be available as special order - add "-0" as suffix when ordering. Contact Neutrik USA, Inc.® for details.

# **Mounting Screws**

4 and 5 pin A & B Series use part # Screw-2.9m

www.neutrikusa.com

A/B SERIES SPECIFICATIONS	3 PIN	4 PIN	5 PIN
Electrical			
Number of contacts:	3	4	5
Rated current:	6A	4A	3A
Rated voltage: 50 Vac	X	X	X
Dielectric strength: 1500 V dc	X	X	X
Contact resistance (measured between soldering points):	@10 mA / 1kHz	@10 mA / 1kHz	@10 mA / 1kHz
Initial	© TO HIAT TRILE	© TO THAT TRUE	©10 III// TRIL
Female: <5 mΩ	Χ	Χ	Χ
Male: <3 mΩ	X	X	X
After salt mist and damp heat test	^	^	X
Female: $<7 \text{ m}\Omega$	Χ	Χ	Χ
Male: $<4 \text{ m}\Omega$	X	X	X
Insulation resistance:	A	^	A
• Initial: >2GΩ @ 500 Vdc	Χ	Χ	Χ
• After salt mist and damp heat test: >1GΩ @ 500 Vdc	X	X	X
Capacity between contacts:	<4 pF	≺ ≤7 pF	^ ≤7 pF
capacity between contacts.	24 bi	<i>Ξ</i> / μι	31 pi
Mechanical			
Applicable wire size: 0.22mm²/24 AWG and 0.14mm²/26 AWG	IDC Version only	N/A	N/A
Retention method (female only):			
Standard: latch lock	Χ	Χ	Х
<ul><li>"-O" version: retention spring instead of "PUSH" tab</li></ul>	Χ	Χ	Χ
Separating force: 20N ≤ F ≤ 26N	X	X	X
Environmental			
Operating temperature: -30°C to +80°C	X	Χ	Х
Flammability: UL 94 HB	UL 94V-0	Χ	Χ
Solderability: Complies with IEC 68-2-20	Χ	Χ	X
Materials			
Housing:			
• A-Series: PA 6.6 30% GR (glass reinforced)	Χ	Χ	Χ
B-Series (ring): ZnAl4Cu1gal Ni or black chrome	Χ	Χ	Χ
Contacts:			
• Female: CuSn6	Χ	Χ	Χ
Male: CuZn35Pb2	Χ	Χ	Χ
Contact surface: gal 0.2 µm AuCo over 2 µm NiP15 (Tribor)	Χ	Χ	Χ
Latch lock & spring: Ck 67 steel, treated	Х	Х	Х















# D Series

This connector consists of an insert and shell which lock together using a "00" size flathead screwdriver (part # SD-1) after assembly. The ability to order the inserts and shells separately allows the user to choose the best combination for any application. PCB mount horizontal (right angle),

# of Contacts Silver Silver Gold Termination

NC3MD-H NC3MD-V-BAG NC3MD-V-B PCB Mount Vertical

NC3MD-L NC3MD-L-BAG NC3MD-L-B Solder Springs

vertical, or solder springs are the available terminations. RF protected via 3 point coaxial ground contact to the shell of mated connectors. Available accessories are the same as for the "D-L-1" series (see page 39).

ORDERING INFORMATION -					eries Female
	# of Nickel Black Chrome			me	
	Contacts	Silver	Silver	Gold	Termination
	3	NC3FD-H	NC3FD-H-BAG	NC3FD-H-B	PCB Mount Horizontal
	3	NC3FD-V	NC3FD-V-BAG	NC3FD-V-B	PCB Mount Vertical
	3	NC3FD-L	NC3FD-L-BAG	NC3FD-L-B	Solder Springs

ORDERING INFORMATION – "D" Series Inserts/Shells Female						
# of Contacts	Silver	n s e r t s Gold	Termination	Nickel	S h e l l s Black Chrome	Black Plastic
3	3FD-H-I	3FD-H-I-B	PCB Mt Horiz	DH-NF**	DH-NF- BAG**	DHP
3	3FD-H-I-0	N/A	PCB Mt Horiz	DH-NF-0**	DH-NF- BAG-0**	
3	3FD-L-I	3FD-L-I-B	Solder Spring			
3	3FD-L-I-0	N/A	Solder Spring			
3	3FD-V-I	3FD-V-I-B	PCB Mt Vert			
3	3FD-V-I-0	N/A	PCB Mt Vert			
0 1-4-66				. 1		

ORDERING INFORMATION – "D" Series Inserts/Shells Male							
# of Contacts		l n s e r t s Gold	Termination	Nickel	S h e l l s Black Chrome	Black Plastic	
3	3MD-H-I	3MD-H-I-B	PCB Mt Horiz	DH-NM**	DH-NM- BAG**	DHP	
3	3MD-L-I	3MD-L-I-B	Solder Spring				
3	3MD-V-I	3MD-V-I-B	PCB Mt Vert				

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

<sup>-0 =</sup> Latchless - retention spring instead of "push" tab

<sup>\*\*</sup> Shells available with M3 threads add "-M3" as suffix when ordering. Minimums may be required. Contact Neutrik USA, Inc.® for details.



# P Series

One piece metal shell panel receptacle with large solder cups. The insert is non-removable. The "P" Series is front mountable only and the male and female have different mounting dimensions.

ORDERING INFORMATION - "P" Series Male					
	# of Nickel Shell		Black Chro	ome Shell	
	Contacts	Silver Contacts	Silver Contacts	Gold Contacts	
	3	NC3MP	NC3MP-BAG	NC3MP-B	
	4	NC4MP	NC4MP-BAG	NC4MP-B	
	5	NC5MP	NC5MP-BAG	NC5MP-B	
	6	NC6MP	NC6MP-BAG	NC6MP-B	

Male "P" Series not available in 6 pin Switchcraft $^{\circ}$  equivalent or 7 pin configurations

ORDERING INFORMATION - "P" Series Female					
# of Contacts	Nickel Shell Silver Contacts	Black Chro Silver Contacts			
3	NC3FP-1	NC3FP-1-BAG	NC3FP-1-B		
4	NC4FP-1	NC4FP-1-BAG	NC4FP-1-B		
5	NC5FP-1	NC5FP-1-BAG	NC5FP-1-B		
6	NC6FP-1	NC6FP-1-BAG	NC6FP-1-B		
6*	NC6FPS-1	N/A	N/A		
7	NC7FP-1	N/A	NC7FP-1-B		

\*Switchcraft® equivalent



# D-L-1 Series

In this series the male and female fit in the same hole cut out and are front or rear mountable. The "D-L-1" Series features a one piece unit with solder cup terminations. This series is very cost effective. Accessories include male and female rubber dust covers (SCDF or SCDM), DBA blank plastic plate, and DSS color coded labeling plates (see page 39).

ORDERIN	G INFORMAT	ION – "D-L-1	" Series Male
# of Contacts	Nickel Shell Silver Contacts	Black Chro Silver Contacts	me Shell Gold Contacts
3	NC3MD-L-1	NC3MD-L-1-BAG	NC3MD-L-1-B
4	NC4MD-L-1	NC4MD-L-1-BAG	NC4MD-L-1-B
5	NC5MD-L-1	NC5MD-L-1-BAG	NC5MD-L-1-B
6	NC6MD-L-1	NC6MD-L-1-BAG	NC6MD-L-1-B
6*	NC6MDS-L-1	N/A	NC6MDS-L-1-B
7	NC7MD-L-1	N/A	NC7MD-L-1-B

ORDERIN	IG INFORMATI	ON – "D-L-1"	Series Female
# of Contacts	Nickel Shell Silver Contacts	Black Chro Silver Contacts	me Shell Gold Contacts
3	NC3FD-L-1	NC3FD-L-1-BAG	NC3FD-L-1-B
3	NC3FD-L-1-0	NC3FD-L-1-BAG-0	N/A
4	NC4FD-L-1	NC4FD-L-1-BAG	NC4FD-L-1-B
5	NC5FD-L-1	NC5FD-L-1-BAG	NC5FD-L-1-B
6	NC6FD-L-1	NC6FD-L-1-BAG	NC6FD-L-1-B
6*	NC6FDS-L-1	N/A	NC6FDS-L-1-B
7	NC7FD-L-1	NC7FD-L-1-BAG	NC7FD-L-1-B

-0 = Latchless retention spring instead of "push" tab.

\*Switchcraft® equivalent

Parts may also be available with M3 threads. Minimums may be required. Contact Neutrik USA, Inc.® before ordering.



# PP Series

The PP series is a cost effective alternative for your XLR panel receptacle needs. Made in a black plastic housing with solder cup terminations, the PP series fits in the same mounting hole as our D-L-1 series. The female is latchless and both male and female are available with 3 contacts as standard. Accessories are the same as for the "D-L-1" series (see page 39).

ORDERING I	NFORMATION - "PP" Series Male
# of	Black Plastic Shell
Contacts	Silver Contacts
3 only	NC3MPP
OPDEDING IN	FORMATION "DD" Corios Fomalo

OKDE	KING INFORMATION - "PP" Series Female
# of	Black Plastic Shell
Contacts	Silver Contacts
3*	NC3FPP

\* Females available w/ 4-7 contacts in US only. Minimums may be required. Contact Neutrik USA, Inc.® for details.



# DM3 Series

Featuring 4 or 5 pin PCB mount horizontal (right angle) or vertical contacts. One piece unit allows male and female to mount in same hole cutout. Rear mountable only. Available accessories are the same as for the "D-L-1" series (see page 39).

ORDERING INFORMATION - "DM3" Series Male							
# of	Nickel Shell	Black Chrome Shell					
Contacts	Silver C	ontacts	Termination				
4	NC4MDM3-H	NC4MDM3-H-BAG	PCB Mount Horizontal (Rt. Angle)				
5	NC5MDM3-H	NC5MDM3-H-BAG	PCB Mount Horizontal (Rt. Angle)				
5	N/A	NC5MDM3-V-BAG	PCB Mount Vertical				

ORDEI	RING INFO	RMATION - "DM	3" Series Female
# of	Nickel Shell	Black Chrome Shell	
Contacts	Silver	Contacts	Termination
4	NC4FDM3-H	NC4FDM3-H-BAG	PCB Mount Horizontal (Rt. Angle)
5	NC5FDM3-H	NC5FDM3-H-BAG	PCB Mount Horizontal (Rt. Angle)
5	N/A	NC5FDM3-V-BAG	PCB Mount Vertical

13

Special orders may be available. Minimums required. Contact Neutrik USA, Inc.® before ordering.

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

	"P" SERIES	"D-L-1" SERIES	"PP" SERIES	"D" SERIES	"DM3"
Electrical					
Number of contacts:					
• Female:	3-7	3-7	3*	3 only	4-5
• Male:	3-6	3-7	3 only	3 only	4-5
Rated Current: See table on page 8	Χ	Х	Х	6A	Х
Rated voltage: 250 V ac	Χ	Χ	Χ	Χ	Χ
Contact resistance: ≤5 mΩ	Х	Х	Х	Х	Χ
Insulation resistance					
• Initial: >2GΩ	Χ	Χ	Χ	Χ	Χ
• after damp heat test: $>1$ G $\Omega$	Χ	Χ	Χ	Χ	Χ
Dielectric strength: 1500 V dc	Χ	Х	Х	Χ	Χ
Mechanical					
Insertion / withdrawal force: ≤20N / ≤10N	Х	Х	Х	Х	Х
Max. wire size: See table on page 6	Х	Χ	Χ	"-L" version only	N/A
Retention method (Female versions only):					
Standard: latch lock	Χ	Χ	N/A	X	Χ
• "-O" version: retention spring (3 pin female only	) N/A	Χ	Χ	Χ	N/A
Separating force: ≥20N	Χ	Χ	Х	X	Χ
Environmental					
Temperature range: -30°C to +80°C	Х	Х	Х	Х	Х
Flammability: UL 94HB	Х	Χ	Χ	Χ	Х
Solderability: Complies with IEC 68-2-20	Χ	X	Χ	X	Χ
Materials					
Shell: ZnAlCu1, gal Ni or black chrome plating	Χ	Х	Χ	ZnAl4Cu1	Χ
Insert: PA 6.6 30% GR (Glass Reinforced)	Χ	Χ	Χ	Χ	Χ
Contacts:					
• female (3-pole): CuSn6	Χ	Χ	Χ	Χ	Χ
• female (4-7-pole) & male: CuZn39Pb3	Χ	X	Χ	Χ	Χ
Contact surface (over 2µm Ni):					
• Gold: gal 0.2 μm Au hard alloy	Χ	Χ	N/A	Χ	Χ
• Silver: gal 2µm Ag	Χ	Х	Χ	Χ	Χ
Latch lock & spring: Ck 67 steel, treated	Χ	Χ	N/A	Χ	Χ

\*Females available in 4-7 pins in US only. Call Neutrik USA, Inc.® for details. Minimums may be required.







# NJ3FP6C Series

This series of panel mount locking 1/4" chassis jacks with solder terminations is made to mount in the same hole cutout out as our "D" and NL4MP series of panel mount receptacles. Options include a plastic shell and FastOn® solder tabs versions. Contact factory for ordering information.

ORD	ERING IN	FORMATION -	"NJ3FP6C	' SERIES
# of	Nickel Shell	Black Chrome Shell	Plastic Shell	
Contacts		Silver Contacts		Contacts
3	NJ3FP6C	NJ3FP6C-BAG	NJ3FP6C-P	TRS

# NJ3FC6 Series

This series features the NEUTRIK® innovation of a securely locking 1/4" cable jack with latch release. Mates with all mono or stereo plugs specified to EIA RS-453. Able to handle cable OD up to 8mm.

ORDE	RING INFO	RMATION - "NJ:	BFC6" SERIES
# of	Nickel Shell	Black Chrome Sh	iell
Contacts	Silver Contacts		Contacts
3	NJ3FC6	NJ3FC6-BAG	TRS







# NJ\*FD/TB-V Series

Vertical mounting PCB jacks come in either standard 1/4" (FD) or long frame mil gauge (TB) versions. These jacks feature a snap on/twist off cap which drastically reduces assembly times. The retention force is provided by a special spring element which is independent of the contacts. Compact design allows more jacks in less space.

	ORDERING INFORMATION - NJ*FD/TB-V Series						
		Vert	ical Jacks				
# of STD 1/4" MIL Gauge							
	Contacts Gold Contacts		Gold Contacts	Contacts			
	2	NJ2FD-V	N/A	TS			
	3	NJ3FD-V	N/A	TRS			
	5	NJ5FD-V	N/A	T,TN,R,RN,S			
	6	NJ6FD-V	NJ6TB-V	T,TN,R,RN,S,SN			

NOTE: Additional 1/4" jacks can be found in the NYS Series Product Guide

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

	NJ3FC6 SERIES	NJ3FP6C SERIES	NJ*FD/TB-V SERIES
Electrical			
Rated current: 10 A	Χ	Х	3A
Rated current switch contact	N/A	N/A	0.25 A @ 12 V
Contact resistance:			
• Initial: <6 m $\Omega$	Χ	X	<10 mΩ
• After life test: $<$ 15 m $\Omega$	Χ	Χ	$<$ 20 m $\Omega$
Insulation resistance			
<ul> <li>Initial: &gt;2GΩ</li> </ul>	Χ	Χ	>1GΩ @ 500 v dc
• After damp heat test: $>1$ G $\Omega$	Χ	Χ	Χ
Rated switch contact resistance:	N/A	N/A	<15 mΩ
Dielectric strength: 1.5 kV dc	Χ	Χ	1000 V dc
Mechanical			
Life: >10,000 cycles	Χ	X	X
Insertion/Withdrawal force: <19N / <22N	Χ	Χ	<10N / >8N
Locking force: >80N	Χ	X	N/A
Wire size: 1 mm <sup>2</sup> / 18 AWG max for soldering tag	Χ	Χ	N/A
Cable O.D.: 3.5 mm - 8.0 mm	Χ	N/A	N/A
Cap opening torque: 25N cm / 9.84N in	N/A	N/A	Χ
Panel thickness	N/A	N/A	1.2 - 1.5 mm (0.047 - 0.06")
Environmental			
Temperature range: -20°C to +65°C	Χ	Χ	Χ
Solderability: Complies with IEC 68-2-20	Χ	Χ	Χ
Materials			
Shell: ZnA/4Cu1 nickel plated or black chrome	Χ	Х	N/A
PA 6.6 30% GR	N/A	Х	Х
Insulation: PA 6.6 30% GR	Χ	Х	X
Contacts: CuBe2 / CuZn37 (ground) 2 µm Ag plated	Y X	Х	N/A
CuSn6	N/A	N/A	0.2 μm Au over 2 μm Ni
Chuck: POM	Χ	N/A	N/A
Cap: POM	N/A	N/A	X
Bushing: PA 6.6 15% GR + PUR	Х	N/A	N/A
Applicable Standard Compability			
EIA RS 453	Х	Х	NJ*FD-V
B Gauge BPO316 / MIL-J-641/3	N/A	N/A	NJ*TB-V



# 1/4" Plugs

NP\*C Series These 1/4" professional phone plugs are available in mono (2 contacts/TS) or stereo (3 contacts/TRS), according to EIA RS453. Features include a diecast metal shell and unique NEUTRIK® chuck type strain relief. Straight and right angle versions available. BSP boots and PCR rings offered for color coding (see page 39).

**NP\*RCS** A slim right angle version of our standard 1/4" professional phone plug. The NP\*RCS versions feature a narrow profile and a solder or solderless ground wire. BSP boots offered for color coding (see page 39).

ORDER	ORDERING INFORMATION – Mono (TS) 1/4" Plugs					
# of Nickel Shell Black Chrome Shell Contacts Nickel Contacts Gold Contacts						
Contacts	Nickel Contacts	Nickel Contacts	Gold Contacts	Contacts		
2	NP2C	NP2C-BAG	NP2C-B	TS		
2	N/A	NP2C-BAG-D*	N/A	TS		
2	NP2C-T10AA	NP2C-T10AA-BAG	N/A	TS**		
2	NP2L	NP2L-BAG	N/A	TS		
2	NP2RCS	N/A	N/A	TS		
**W/ 1:10 transformer to convert mic level to guitar inputs						

# ORDERING INFORMATION – Stereo (TRS) 1/4" Plugs

# OT	Nickei Sheii	Black Chrome Shell		
Contacts	Nickel Contacts	Nickel Contacts	<b>Gold Contacts</b>	Contacts
3	NP3C	NP3C-BAG	NP3C-B	TRS
3	NP3C-D*	NP3C-BAG-D*	N/A	TRS
3	NP3RCS	N/A	N/A	TRS

<sup>\*</sup>Bulk packaged – must be ordered in multiples of 100



# Military Gauge Series

NEUTRIK® offers a variety of plug fingers to meet mil spec applications. All versions feature a metal shell in black (-B) or red (-R) and unique NEUTRIK® chuck type strain relief. Assembly is quick with no rivets or screws to worry about.

ORDERING INFORMATION – Mil Gauge Series						
# of Contacts	Coated Brass Shell Silver Contacts	Mil. Gauge	Spec Diameter	Contacts		
3	NP3TB-B or -R	BPO 316	.250"	TRS		
3	NP3TM-B or -R	642/2	.250"	TRS		
2	NP2CM-B or -R #	642/4	.250"	TS		
3	NP3CM-B or -R #	642/5	.206"	TRS		

# Also available as plug fingers only in Nickel or Brass for overmolding.



# **NP3TT Series**

These bantam size (4.4mm/0.173") miniature stereo plugs have recently been redesigned to be crimped with any standard RG58 crimp tool. The gold contact version when used with our NJ3TTA jacks (see page 31) eliminates mating problems due to corrosion or dirt.

ORD	ERING INFO	RMATION -	"NP3TT"	Series
# of	Plasti	c Sleeve	Sleeve	
Contacts	Silver Contacts	Gold Contacts	Color	Contacts
3	NP3TT-P-B	NP3TT-P-B-AU	Black	TRS
3	NP3TT-P-R	NP3TT-P-R-AU	Red	TRS
3	NP3TT-2	N/A	Black	TRS

NOTE: Additional 1/4" plugs can be found in the NYS Series Product Guide

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

	NP2C SERIES	NP3C SERIES	NP*RCS SERIES	MIL GAUGE SERIES	NP3TT SERIES
Electrical					
Rated current: depends on mating connector	Х	Х	Х	Х	Х
Contact resistance: depends on mating connector	Х	Х	Х	X	Х
Insulation resistance:					
• Initial: >2GΩ	Χ	Χ	Х	Χ	Х
• After damp heat test: $>1$ G $\Omega$	Χ	Χ	Χ	X	Χ
Dielectric strength:					
• 1.5 kV dc	Χ	N/A	2 pole	Χ	N/A
• 1 kV dc	N/A	Χ	3 pole	N/A	Χ
Mechanical					
Wiring: solder terminals	Х	Х	Х	Х	Tip & ring
Solderless ground	N/A	N/A	Х	N/A	N/A
Sleeve: HEX crimp (5.4 mm) acc. to IEC 803	N/A	N/A	N/A	N/A	Χ
Wire size: 1 mm² / AWG 18	Х	Χ	Х	Χ	0.25 mmm <sup>2</sup> / 24 AWG
0.5 mm <sup>2</sup> / AWG 20	N/A	N/A	N/A	NP3CM	N/A
Cable O.D.: 4 – 7 mm	Χ	Χ	X	X	4.8 mm
8 mm / .315"	NP2L	N/A	N/A	N/A	N/A
Environmental					
Temperature range: -20°C to +65°C	Х	Х	Х	Х	Х
Solderability: complies With IEC 68-2-20	Х	Χ	Х	Х	Х
Materials					
Shell: ZnAl4Cu1, Ni or black chrome plated	Х	Х	Ni plated only	N/A	N/A
PA 6.6 50% GR	N/A	N/A	Χ	N/A	N/A
PA 6.6 30% GR	N/A	N/A	N/A	N/A	Χ
Brass CuZn 39 Pb3, black/red coated	N/A	N/A	N/A	Χ	N/A
Insulation: PA 6.6 30% GR	Х	Х	Х	Х	Х
Contacts: CuZn39Pb3, 2µm Ni (Su) plated	Χ	Χ	Х	Х	Χ
CuZn39Pb3, 0.2μm Au	NP2C-B	N/A	N/A	N/A	N/A
CuSn6, 2µm Ni (SU) Plated	N/A	N/A	N/A	N/A	Χ
2μm TRIBOR, (NiP-AuCo)	N/A	N/A	N/A	N/A	Χ
Chuck: POM	Х	Х	Х	Х	N/A
Bushing: POM + PU	Χ	Χ	Χ	N/A	N/A









# Combo

In the past consoles and amplifiers were furnished with two input receptacles per channel: a balanced 3 pin female XLR receptacle and a 1/4" phone jack. In the majority of cases, only one input was used at one time. Keeping with the NEUTRIK® view of innovation, the Combo connector was born – a combined XLR female 3 pin receptacle and 1/4" phone jack in one! This unique connector accepts balanced and line inputs or instrument inputs—all in one unit of panel space!

The Combo is now more compact and cost effective than ever. In response to customer feedback, a solder cup version has been added. The standard vertical and horizontal PCB terminations have new and improved contacts.

The 1/4" jack is available in mono, stereo, or stereo-switching. Another new feature is the availability of a switching XLR ground contact. The jack retention force is delivered by a special element which is completely separate from the jack.

Available in locking (latching) or non-locking (latchless) versions, the Combo is digital capable due to the low capacity of the conductors.

Mounting Screws – use part # Screw-2.9m

COMBO Series Specifications		
Electrical		
Number of contacts:	3 XLR; TRS, G, TN, RN, S XLR grd contact (GN)	5N & optional switched
Rated current:	XLR=7.5A	Jack contacts=3A
Rated voltage:	125 V ac	
Contact resistance:	• XLR: <10 m $\Omega$	<ul> <li>Jack: &lt;20 mΩ</li> </ul>
Insulation resistance:	After damp heat test:	>0.5GΩ
Dielectric strength:	1500 V dc	
Capacitance:	>2pF	

Mechanical

Engagement / • XLR: <10N / >15N

separation force: • Jack: <15N / >15N

Environmental

Temperature range: -20°C to +66°C

Flammability: UL94HB

Solderability: Complies with IEC 68-2-20

Materials

Shell: Polyamid, PA 6.6 30% GR

Contacts: • Jack and XLR: CuSn6

Contact plating: • XLR and switch contacts: galv. Au

• Jack and ground: galv. Ag

19

ORDERING INFORMATION - Combo Series				
Combined XLR Receptacle and 1/4" Phone Jack				
Description	Horizontal PCB	Vertical PCB	Solder Cups	Jack Contacts
3 pole female XLR / nonswitching mono-jack	NCJ5FI-H	NCJ5FI-V	NCJ5FI-S	T,S,G
3 pole female XLR / nonswitching stereo-jack	NCJ6FI-H	NCJ6FI-V	NCJ6FI-S	T,R,S,G
3 pole female XLR / switching (normalling) stereo-jack	NCJ9FI-H	NCJ9FI-V	NCJ9FI-S	T,R,S,G,TN,RN,SN,
3 pole female XLR / switching ground and stereo-jack	NCJ10FI-H	NCJ10FI-V	NCJ10FI-S	T,R,S,G,TN, RN, SN, GN

Add "-O" as suffix to any part for latchless version (retention spring instead of "Push" Tab). i.e. NCJ6FI-H-O

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

Speakon® Speakon®








Speakon® 2-Pole

Sn



















Speakon® 8-Pole

Speakon® 4-Pole Chassis

Speakon® is not to be used as a "main" (AC) connector.

# Speakon®

This series of professional speaker and amplifier connectors is recognized as the industry standard. The Speakon® product line features 2, 4 and 8 pole versions.

Patent protected, reliable, cost effective, and extremely durable the Speakon® system offers the "quick lock" locking system and recently redesigned inserts on its cable ends. The inserts feature solderless connections using new pozidrive and slot combination screw terminals with a captivated pressure plate. No special tools are required making these connectors 100% field repairable. We do offer a screwdriver as an accessory - use part # SD-NLP for your convenience.

Speakon® panel receptacles with solder terminations also allow you to use quick disconnect type terminals (Faston®) for easy and reliable assembly. These quick disconnects can be ordered from Neutrik USA, Inc.® - use part # NL-FASTON. Speakon 4 pole receptacles are available with PCB vertical and horizontal terminations or screw terminals. A new increased current version is also available. OEM specials maybe available, please contact Neutrik USA, Inc.® for details.

The contacts in this series are touch proof and designed to prevent damage from arcing if disconnected under load. Ensuring fail safe conditions for both the equipment and the operator, Speakon® meets the prevailing safety standards of IEC65, IEC348, CE, CSA and are UL rated (file #E135070).

# **Wiring Suggestions**

Positive signal on speaker pin "+" produces positive waveform from driver (moves cone outwardly)

"+" = In phase (high) "-" = Ground (out of phase, low)

Lower numbers for lower frequencies

	Amplifier	Cable	Speaker
Stereo ("HiFi")	One NL4MP socket left channel pins 1+/1- right channel pins 2+/2-	NL4FC on amplifier end, four conductor cable splits into two pairs with NL4FC on each end	one NL4MP per speaker left speaker pins 1+/1- right speaker pins 2+/2-
POWER ("PA") Standard	three NL4MP socket "A" socket: left channel pins 1+/1- "B" socket: right channel pins 1+/1-	A two-conductor cable for each channel with NL4FC on both ends	NL4MP pin 1+ to speaker coil "+" NL4MP pins 1- and 2+ to speaker coil "-"
Bridged mono	"M" socket: left channel pins 1+/1- right channel pins 2+/2-	A special two conductor cable, on both ends wired to pins 1+/2+ of NL4FC	NL4MP pin 1+ to speaker coil "+" NL4MP pins 1- and 2+ to speaker coil "-"
Bi-Amp	one NL4MP socket low frequency pins 1+/1- high frequency pins 2+/2-	a four-conductor cable on both ends wired to pins 1+/1-, 2+/2- of NL4FC	one NL4MP socket low frequency pins 1+/1- high frequency pins 2+/2-

Schematics available online – www.neutrik.com in the FAQ section – or by fax from Neutrik USA, Inc.®

Neutrik has added to the Speakon® line with the 2002 introduction of the STX and SPX series.

Information is available on a separate brochure or on our website – www.neutrikusa.com – or contact Neutrik USA, Inc.® for details.

		ORDERING INFORMATION - Speakon®			
Туре	Terminations	Description	2 pole	4 pole	8 pole
Cable	Screw Screw	quicklock feature with quicklock feature & gold contacts — all black body	NL2FC N/A	NL4FC NL4FC-B	NL8FC N/A
Chassis	Solder / Faston Vertical PCB Horizontal PCB Horizontal PCB Horizontal PCB Solder / Faston Screw	airtight – square flange airtight – square flange – mounting holes in opposite corners airtight – square flange & gold contacts airtight – round flange – all plastic airtight – round flange – nickel bezel airtight – round flange – black chrome bezel airtight – square flange airtight – square flange airtight – square flange – grey housing – mtg holes for self tapping screws airtight – square flange – mounting holes in opposite corners airtight – round flange – all plastic airtight – round flange – nickel bezel airtight – round flange – black chrome bezel airtight – square flange airtight – square flange – mounting holes in opposite corners airtight – round flange – nickel bezel airtight – round flange – nickel bezel airtight – round flange – black chrome bezel airtight – round flange – black chrome bezel airtight – handles 40A for audio or 50A for audio w/2 contact load airtight – no special tools required – ideal for field applications	NL2MP N/A N/A N/A N/A N/A NL2MD-V N/A N/A N/A N/A N/A N/A N/A N/A N/A N/A	NL4MP NL4MP-2 NL4MP-B NL4MPR N/A N/A NL4MD-V NL4MD-V-1 NL4MD-V-2 NL4MPR-V N/A N/A NL4MD-H NL4MD-H NL4MD-H-2 N/A N/A NL4MP-UC NL4MP-ST	N/A N/A N/A N/A NL8MPR NL8MPR-BAG N/A N/A N/A N/A NL8MD-V NL8MD-V-BAG N/A N/A NL8MD-H NL8MD-H NL8MD-H-BAG N/A N/A
Boot		drip boot for wet environments – use with NL4FC	N/A	BSL-WR	N/A
Adapter		coupler for cable extensions 4 pole Speakon to 1/4" - connects +1 to Tip, -1 to Sleeve	NL4MMX NA4LJ	NL4MMX NA4LJ	NL8MM N/A
Accessories		Mounting screws to mount chassis connectors to panel 4.8mm x 0.5mm tab for use with solder type receptacles	Screw-2.9m NL-FASTON	Screw-2.9m NL-FASTON	Screw-2.9m NL-FASTON

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

	NL*FC	NL*MP	NL*MPR	NL*MD
Electrical				
Rated current/contact:				
30A rms continuous / 40A rms 1 minute	Х	Χ	Χ	Х
50A rms continuous for audio signal w/2 contacts	N/A	NL4MP-UC	N/A	N/A
Dielectric Strength: 4KV peak	Х	Х	Х	Х
Rated voltage: 250V ac (Speakon is not to be used as an AC mains connector)	Χ	Χ	Χ	Х
Contact resistance:				
$<$ 3 m $\Omega$ after 5,000 insertion/withdrawals	Χ	Χ	Χ	Х
$<$ 10 m $\Omega$ after 5,000 insertion/withdrawals				NL4MD-H
nsulation resistance: 250 V ac				
initial: >2GΩ	Х	Χ	Χ	Х
after damp heat test: $>1$ G $\Omega$	Х	Χ	Χ	Х
nrush/outrush current capability (12v source): 300/30 A/200 ms	Х	Х	Х	Х
Creepage distance is according to IEC 664-1	Χ	X	X	Χ
Mechanical				
Retention method - quicklock with latch	Χ	N/A	N/A	N/A
Cable anchoring - Neutrik chuck principle	Χ	N/A	N/A	N/A
Cable OD range:				
6 - 10 mm	NL2FC	N/A	N/A	N/A
6 - 15 mm: white chuck (6 - 11mm); black chuck (9.5 - 15mm)	NL4FC	N/A	N/A	N/A
8 - 20 mm: w/reducing sleeve (8 - 15mm); w/o sleeve (15 - 20mm)	NL8FC	N/A	N/A	N/A
Cable retention force of >220N is subject to cable diameter & material	Χ			
Niring:				
chassis: solder = flat tabs for Faston 4.8mm x 0.5mm (.187")	N/A	Χ	X	N/A
chassis: solder = flat tabs for Faston 6.3mm x 0.8mm (.25")	N/A	NL4MP-UC	N/A	N/A
chassis: PCB pins 1.6mm x 0.5mm	N/A	N/A	NL4MPR-V	Χ
chassis: screw terminals - 4mm² / AWG12	N/A	NL4MP-ST	N/A	N/A
Material				
Contacts: CuZn39Pb3/CuSn8 4um Ag plated	Χ	Χ	Χ	Х
Securing element: ZnAl4Cu1, Ni plated	Χ			
Spring element: Neoprene ring	N/A	Χ	X	Χ
Housings:				
PA 6 30% GR	Χ	Χ	NL4MPR (all)	NL4MD (all
ZnAl4Cu1, Ni or black chrome plated			NL8MPR (all)	NL8MD (all
nsert: PBTP 20% GR	Χ	N/A	N/A	N/A
Boot: PA 6 15% GR	Χ	N/A	N/A	N/A
Chuck: POM	Χ	N/A	N/A	N/A





Wiring:



# PowerCon®

PowerCon® is a lockable 3 pole equipment (AC) connector with contacts for line, neutral, and premating safety grounds. It is rated at 20A/250V ac. Color coded for easy identification, PowerCon® offers power-in (blue) and powerout (grey) versions with different keying to avoid the possibility of short circuiting. The contacts are designed to prevent damage from arcing when disconnected while under load. PowerCon® is not designed to be a "mains" connector or for speaker/amplifier applications. For speaker/applications please see Speakon on pages 20-22.

**71** (\$\\ \\$)

This series of connectors is rugged and reliable and is UL recognized, SEV and VDE approved and meets prevailing safety standards.

The cable ends use the "quick-lock" latch for fast and easy locking. PowerCon® inserts feature solid contacts with screw type terminals. No special assembly tools are required. The chassis connectors have large solder tabs which accept FastOn® type quick disconnects for even easier hard wiring.

PowerCon® meets or exceeds the demands of applications in the fields of A/V usages, test and measurement equipment, computers, or industrial designs.

ORDERING I	NFORMATION -	PowerCon®	
Description	Part #		
	A-type: for power in (Blue)	B-type: for power out (Gray)	
Cable connector, quick lock with securing lever	NAC3FCA	NAC3FCB	
Chassis connector, air tight	NAC3MPA	NAC3MPB	
Coupler for linking cables (Couples NAC3FCA to	NAC3	MM	
NAC3FCB)			

PO	WERCON® Spe	cifications
UL-Recognized (E 13	5070) VDE rated (6360	)) SEV approved (No. 96.1 10096)
Electrical		
Number of contacts:	3	
Rated current/contact:	20 A rms @ wire size	2.5 mm <sup>2</sup>
Rated Voltage:	250 V ac	
Contact resistance after	er 5000 insertion-withd	rawal operations: ≤3 mΩ
Insulation resistance:	• Initial: $>2G\Omega$	$ullet$ After damp heat test: >100M $\Omega$
Creepage distance:	according to IEC 664-	-1
Safety ground:	Premating	
Dielectric strength:	4 KV peak	

	6 6 7 1 1 1 1 2
<ul><li>Cable:</li></ul>	screw-type terminals or soldering
	Max wire size/contact: 4 mm <sup>2</sup> / 12 AWG (stranded)
<ul><li>Chassis:</li></ul>	flat tabs for FASTON®, 0.187" x 0.02"
	(4.8mm x 0.5mm) or soldering
Cable OD range:	5-15mm

	5mm (.19") – 11mm (.433) 9.5mm (.374") – 15mm (.787")
Cable anchoring:	NEUTRIK®, chuck principle
Cable retention force:	≥220N, depending on cable diameter and material
Retention method:	Quicklock with securing lever

Environmental	
Temperature range:	-30°C to +80°C
Materials	
Housing:	PA 6 30% GR
Insert (FC part):	PBTB 20% GR
Bushing:	PA 6.6 15% GR
Chuck:	POM
Contact:	CuZn39Pb3 / CuSn8, 4µm/20mm Ag plated
Securing lever:	7nAl4Cu1. CuNi plated

7 3 2 - 9 0 1 - 9 4 8 8

Χ

Temperature Range =  $-30^{\circ}$  C to  $+80^{\circ}$  C

www.neutrikusa.com



# NanoCon®

NanoCon® is the smallest – measuring just 0.236" in diameter x 1.22" (6mm x 31mm) – lockable multi-pin connector in the world! Another member of the Neutrik® family of miniature circular connectors, NanoCon® offers a selective load of 1 - 3 gold contacts in mating cable ends, PCB vertical or horizontal male and female receptacles, or male and female solder termination receptacles.


The machined metal nickel plated housings hold inserts which contain machined gold contacts. Pin #1 mates first, breaks last. Panel receptacles with blank inserts, mating cable ends with interchangeable inserts and fully loaded PCB receptacles are available.

The NanoCon® cable connectors utilize the unique Neutrik® chuck type strain relief and all housings have polarizing guides for ease of assembly and then mating.

These micro connectors are manufactured without jeopardizing quality or reliability. The versatility of the NanoCon® system allows them to be used in a variety of audio and industrial applications such as wireless mics, control systems, or PCB interface cards.

### ORDERING INFORMATION - NanoCon® Cable Connectors Female Male Description Cable housing – nickel with boot & chuck NSC NSC Insert – unloaded must order contacts separately NF3 NM3 Solder contacts – gold NBS NPS Mating cable housing – nickel with boot & chuck NMC NMC

ORDERING INFORMATION – Na	anoCon®	)
Receptacles		
Description	Female	Male
Receptacle housing with insert – must order contacts	NR3F	NR3M
Solder contacts – gold	NBS	NPS
Receptacle – vertical PCB mount – complete with contacts	NP3F-V	NP3M-V
Receptacle – horizontal PCB mount – complete with contacts	NP3F-H	NP3M-H

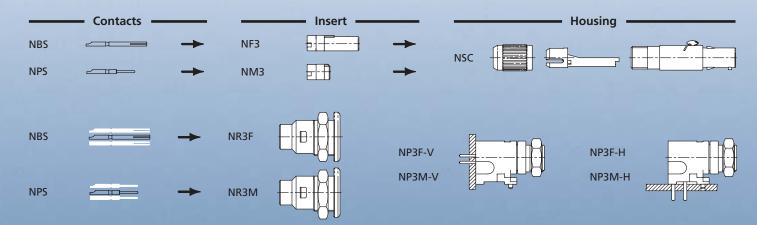









# Neutricon®

Neutricon<sup>®</sup> is a modular system with a minimum of parts offering the user a maximum of variations.

The male and female inserts can be selectively loaded with 1 - 8 gold contacts for solder, crimp (according to MIL-C22520F) or PCB vertical terminations.

Assembly is quick and easy and requires no screws. Your choice of a nickel or black chrome plated receptacle or cable end housing absorbs vibrations and mechanically protects the contacts. These housings offer 90° or 180° polarizing guides to fit your application needs.

SR-8A / 3-3.8mm

SR-8B / 6-7mm

FI-8

BS1

BC1

BB1

MC-8

BSP-\*

For additional Ordering Information please go to www.neutrik.com in the

(see page 39).

Inserts

Strain relief & Boot w/ crimp

ferrule for coaxial grounding

Blank

Mating Cable End – Cable Housing#

Cable housing boot for color coding

TECHNICAL SUPPORT section under ASSEMBLIES

Strain relief & Boot

Contacts • Solder

strain relief, will accommodate cable diameters of 3-7mm, and are equally suitable for flat ribbon cables. Additional crimp ferrules for coaxial shield terminations are available as an option. The Neutricon® non-threaded, self-activating, push-pull

The cable connectors utilize the unique Neutrik® chuck type

locking system is vibration proof. A splash proof version (per IP65) is available, just contact Neutrik USA, Inc.® for the details. Color coded boots (use part # BSP-color – see page 39) are an optional accessory.

ORDERING INFOR	RMATION - N	ORDERING INFO	ORMATION	
Cabl	e Connectors		Receptacles	
Description	Female	Male	Description	Female
Cable housing, Nickel#	SC-8Ni	SC-8-Ni	Housing, Nickel#	RP-8Ni
Cable housing, Black Chrome#	SC-8	SC-8	Housing Black Chrome#	RP-8
C I. C. D	CD O	CD O	1	FI 0

SR-8A / 3-3.8mm

SR-8B / 6-7mm

MI-8

PS1

PC1

N/A

MC-8

BSP-\*

\* Available in ten resistor colors

Must order w/ SR-8 for strain relief.

RP-8Ni RP-8 MI-8 Contacts • Solder PS1 BC1 PC1 Crimp • PCB (vertical) RP1 PP1 BB1 Blank

# Available in 90° or 180° polarization. 180° version is standard. Add "-1" as suffix for 90° version.

# **Polarization**

Two variations of metal polarizing guides (180° / 90°) Shell:

180° SC-8 0 0 0 0 0 MC-8 RP-8

SC-81 MC-81 RP-81



- Neutricon®

Male

732-901-9488

www.neutrikusa.com

# Miniature Circular Connectors Specifications



# MiniCon®

MiniCon® is a compact miniature circular connector of modular design. It offers a select load combination of contacts from 1-12.


Offering a precisely machined, rugged, all metal design, MiniCon® features fully loaded male and female PCB horizontal or vertical receptacles, male and female receptacles for crimp or solder contacts and a cable housing with optional crimp ferrules for coaxial shield terminations. The cable connectors accept a wide range of cable diameters (2-7mm) and cable protection is afforded by the unique Neutrik® chuck type strain relief.

Assembling the inserts is quick as the contacts "snap in" to place from the rear. Loaded inserts are seated into their housings correctly every time using the Neutrik® keying method. Once assembled, it is the push-pull locking system that mates these connectors. Pin #1 makes ground first, breaks last.

The MiniCon® system is extremely cost effective and fits a wide variety of applications in the medical, instrumentation, industrial, and audio fields.

RMATION	- MiniC	o n®		
e Connectors				
	Female	Male		
Cable housing (including chuck and boot)				
	MFI	MMI		
– crimp – solder	MBC MBS	MPC MPS		
<ul> <li>Set of strain relief crimp ferrules, for Cable OD:</li> </ul>				
opening				
	e Connectors boot)  - crimp - solder  or Cable OD:	Female boot) MSC MFI  - crimp MBC  - solder MBS  or Cable OD: MSRe		

ORDERING INFORMATION - MiniCon®						
eptacles						
	Female	Male				
	MRF	MRM				
<ul><li>crimp</li><li>solder</li></ul>	MBC MBS	MPC MPS				
– Vertical – Horizontal	MPF12-V MPF12-H	MPM12-V MPF12-H				
	eptacles  - crimp - solder - Vertical	Female  MRF  - crimp  - solder  MBS  - Vertical  MPF12-V				

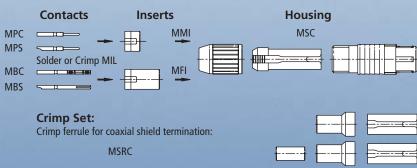

	NanoCon®	Neutricon®	MiniCon®
Electrical			
Number of contacts: user selectable	1-3	1-8	1-12
Rated current/contact:	2A	solder – 7.5 A crimp – 5 A	3A
Rated Voltage:	75 V ac	125 V ac	125 V ac
Contact resistance:	<8 mΩ	<2 mΩ	<6 m $\Omega$
Insulation resistance after damp heat test:	>2GΩ	>0.5GΩ	>0.5GΩ
Dielectric strength:	1.5 Kv dc / 1.06 kV rms	1,500 v dc	1.01 Kv dc / 0.71 Kv rms
Mechanical			
Maximum wire size: • Solder: • Crimp:	0.20 mm² / AWG 24 (solid wire) 0.14 mm² / AWG 26 (stranded wire)	1.0 mm <sup>2</sup> / 18 AWG 0.14 – 0.34 mm <sup>2</sup> / 22 – 26 AWG	0.50 mm <sup>2</sup> / 20 AWG 0.22 mm <sup>2</sup> / 24 AWG
Cable Anchoring: NEUTRIK® chuck principle	X	X	X
Cable OD range:	3.4 mm max	3 – 7 mm SR8A: 3 – 3.8 mm SR8B: 6 – 7 mm	gray chuck: 2 – 5 mm white chuck: 5 – 7 mm crimp contact: 2.5 – 6 mm
Cable retention force:	<100N for 3 mm Cable	<150N for 5 mm Cable	<150N for 5 mm Cable
Retention method: self-locking	X	X	X
Protective system (mated): IP50	Χ	X (higher classes on request)	X
Life time: >1000 cycles	X	X	X
Male contact diameter:	0.5 mm	1 mm	0.8 mm
Environmental			
Temperature range: -30°C to +80°C	X	Х	X
Solderability: complies with IEC 68-2-20	X	Χ	X
Insert flammability: UL 94HB	UL 94V-0	X	UL 94V-0
Materials			
Housings cable & receptacle			
CuSn4Pb4Zn4 (cable connector) CuZn39Pb2 (receptacle)	X X	ZnAl4Cu1, gal Cu/Ni (+ black chrome) ZnAl4Cu1, gal Cu/Ni (+ black chrome)	CuZn35Pb3 / ZnAl4Cu1satin chromium plated satin chromium plated
Insert:	PETP	PBTB 15% GR	PA 6.6
Chuck: POM	Χ	Х	X
Bushing:	BRASS	POM + PUR	BRASS
Contacts: Contact surface:	CuZn35Pb2 0.5 µm Au	CuZn39Pb3 / CuZn35Pb2, 0.3 µm hard gold over Ni	CuZn39Pb3 / CuZn35Pb2 / CuSn6 0.2 µm AuCo plated

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

27



# Profi®

You will not find a higher quality RCA plug. The Neutrik® Profi® professional phono plugs are precisely machined to our highest standards.

Featuring a retractable sleeve, the Profi® connectors makes ground before signal contact and breaks signal before ground. This "makes first, breaks last" feature means you can eliminate unwanted noise and broken speaker cones when used under load.

In addition, Profi® offers the Neutrik® unique chuck type strain relief (includes two sizes for different diameter cables) and gold plated contacts as standard. They arrive in pairs marked red and black for right and left channel.

ORDERING INFORMATION	– Profi®				
Description	Part #				
Packaged in pairs — each marked red & black for right & left channels. Includes 2 strain reliefs for different diameter cables.	NF2CB//2				
Custom orders and packaging may be available.					

Please contact Neutrik USA, Inc.® for details.

Pro	ofi® Specifications
Electrical	
Rated current:	16 A
Rated voltage:	250 V ac
Insulation resistance:	>100GΩ
Capacitance (pin to shell):	7 pF
Dielectric strength:	1500 V dc
Mechanical	
Max. wire size:	2.5 mm <sup>2</sup> / 14 AWG
Cable anchoring:	NEUTRIK® chuck principle
Cable OD range:	
• blue chuck:	3.0 – 5.5 mm
• black chuck:	5.5 – 7.3 mm
Environmental	
Temperature range:	-30°C to +80°C
Solderability:	complies with IEC 68-2-20
Materials	
Shell:	Brass CuZn39Pb3 black coated
Insulator:	PBTP
Chuck:	Polyacetal POM
Contact pin:	Brass CuZn39Pb3 / 0.5 µm Au plated
Ground contact:	Brass CuZn39Pb3 / 0.5 µm Au plated over 5 µm Ni





# Patch Cord Assemblies

Neutrik® utilizes the highest quality craftsmanship and materials to bring you our line of professional TT and TB patch cables.

Our TT patch cords are made with a flexible yet durable cable that is manufactured using our own nickel plated TT plugs (gold plugs are also available). Neutrik® was the first worldwide to provide nickel plating as standard to help eliminate problems of corrosion and tarnish build-up. Each TT plug has a hex crimped strain relief to provide the ultimate in stress protection for the solder joints and actual

cable. Our TT patch cords are offered in five colors (red, black, blue, yellow, and green) that are matching between cord and plug sleeve for easy identification.

The NEUTRIK® professional TB (1/4" long frame) patch cables feature the same craftsmanship and attention to details as our TT cords. Standard features include an all metal black or red body with color matched cable, unique NEUTRIK® chuck type strain relief, and nickel plated contacts. Using a flexible long lasting cable you are assured of NEUTRIK® quality with each use.

ORDERING INFORMATION - TB Patch Cords

ORDERING INFORMATION — TT Patch Cords Bantam style (0.173")						
Part #	Length*					
NKTT03-#	1′					
NKTT04-#	18"					
NKTT05-#	2'					
NKTT1-#	3′					
NKTT12-#	4'					
NKTT2-#	6′					

(1/4") TB-style (B Gauge BPO 316)

1/4" Long Frame Length\*

NKTB03-#

1'

NKTB03-# 1'
NKTB04-# 18"
NKTB05-# 2'
NKTB1-# 3'

# Available in BLK=Black or R=Red

# Available in BLK=Black, GN=Green, R=Red, Y=Yellow, BL=Blue

NOTE: \*Custom lengths available upon request. Minimum quantity of 20 per length & color. Contact Neutrik USA, Inc.® for details.

	TECHNICAL DATA - Patch Cord Assemblies													
Plug Size	Stranding (awg 24)		Insulat Thickn		Jacket Thickno	ess	Nomi	nal O.D.	Capacita Cond. To		Capacita Shield to		Shield	
	inch	mm	inch	mm	inch	mm	inch	mm	pF/ft.	pF/m	pF/ft	pF/m	inch	mm
TT	60 x 0.0028	60x0.07	0.008	0.2	0.028	0.7	0.18	4.6 + 0.2	40pF/ft	120pF/m	66pF/ft	200pF/m	60 x 0.001	60 x 0.12
TB	28 x 0.039	28x0.17	0.01	0.25	0.063	1.6	0.25	6.5 + 0.2	53pF/ft	160pF/m	93pF/ft	280pF/m	85 x 0.039	85 x 0.1

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

# EasyPatch Patch Panels



# **NPPA-TT Series**

All panels are provided with high quality, long life NEUTRIK® NJ3TTA gold plated double contact point TRS jacks (2x48). The NEUTRIK® Easy-Patch system is easily programmable for any one of five signal routing configurations (unit ships in the half-normalled – bottom row configuration) and for the grounding system of your choice. Each individual jack can be changed or reconfigured quickly even while the unit is "on air." The Easy-Patch offers two contact points per (TRS) terminal with a uniquely designed mechanism for the normalling contact. To change or repair a jack, simply remove the front panel to reveal the module, replace or reconfigure the jack(s) and replace the panel. It's that easy! The Easy-Patch is a compact, low cost patching system -

**GROUNDING OPTIONS** 

The flexible grounding system provides the following alternatives:

- Individual: Each channel is individually grounded through its cable shield.
- Group: Selected channel grounds are connected via the bus PCB using solder bridges and track cuts to form a group that is connected to one common cable shield.

1U high and only 7" deep – for 19" rack mounting and can

- Central: All channel grounds (individual top and bottom row) are connected via the bus PCB using solder bridges and wired with only one cable shield.
- Chassis-Common: The same as central grounding but with the addition of the common ground (top and/or bottom rows) connected to the patch panel chassis by means of jumpers.

handle analog or digital signals. The patch panel is housed in a robust black-coated steel/aluminium shell, features precision aluminum hardware, and includes two built in cable bars and two wide channel ID strips.

# Configurations

The standard version of our "Easy-Patch" is delivered with the bottom row half normalled for each jack pair. There are four other normalling configurations available for each jack pair:

- Full Normalled
- Half Normalled Top Row
- Isolated
- Parallel

**CAUTION:** DO NOT use parallel configurations or other parallel paths in the half-normalled configuration when handling DIGITAL signals. Parallel paths may lead to mismatching. Please see the configuration chart included with each unit.

### WIRING TERMINATIONS

Our Easy-Patch system offers different different wiring interconnects at the rear of


- Spring loaded push terminals with gas tight connection\*
- 56 pin Elco/Edac connectors
- Solder lugs


\*The spring loaded terminal blocks allow quick and easy wiring. NO soldering and screwing necessary and NO special tools are required. Simply insert the STRIPPED wire after depressing the release tab. These push terminal blocks can handle stranded wire up to AWG 20 (0.5 mm<sup>2</sup>) and solid wire up to AWG 18 (0.75 mm<sup>2</sup>).


# **Configurations** Chart














Electrical
Frequency range:
Channel separation:
Insulation resistance:
Connector contact re
Switch contact resist
Dielectric strength:
Mechanical
Mechanical
Lifotimo
Lifetime:
Depth:
Depth:
Depth: Insertion/withdrawal
Depth: Insertion/withdrawal Dimensions (rack mo
Depth: Insertion/withdrawal Dimensions (rack mo
Depth: Insertion/withdrawal Dimensions (rack mo Temperature range:

Type No. NPPA-TT-PT-PH

NPPA-TT-E56

NPPA-TT-S

Front par Spring loaded push terminals (PH)



Solder lugs (S) 56+ pin Elco/Edac (E56)

# **ORDERING INFORMATION - NPPA-TT Series** Patch panel, 2x48 jacks, half normalled, 288 push terminals for easy wiring. Patch panel, 2x48 jacks, half normalled, 6x56 pole ELCO male connectors. Patch panel, 2x48 jacks, half normalled, 288 solder terminals for fixed installations.

	ORDERING INFORMATION - Pre-Configured Jack-Pairs	
NJ3TTA-4-HNB	Blocks of 2 channels; half normalled bottom row; cover ident color: clear	
NJ3TTA-4-HNT	Blocks of 2 channels; half normalled top row; cover ident color: yellow	
NJ3TTA-4-FN	Blocks of 2 channels; full normalled bottom row; cover ident color: green	
NJ3TTA-4-P	Blocks of 2 channels; parallel; cover ident color: red	
NJ3TTA-4-I	Blocks of 2 channels; isolated; cover ident color: orange	


# **TECHNICAL DATA:**

Electrical		
Frequency range:	DC to >50 MHz	
Channel separation:	>100 dB @ 10 kHz, $600\Omega$ terminated	>40 dB @ 6 MHz, 110Ω terminated
Insulation resistance:	>1GΩ @ 500 V dc	
Connector contact resistance:	20 mΩ	
Switch contact resistance:	<25 m $\Omega$	
Dielectric strength:	1000 V dc	

Mechanical		
Lifetime:	>5.000 Insertion/withdrawal cycles	
Depth:	178 mm (7")	
Insertion/withdrawal force:	<10N / >8N	
Dimensions (rack mount):	482 mm (W) x 44 mm (H) (19" x 1U)	
Temperature range:	-30°C to +80°C	

Materials		
Jack housing: PA 66 blend		
Jack contacts:	CuSn6 - TRIBOR® plated (0.2 μm AuCo over 2 μm NIP)	
Housing:	sing: Steel and aluminum, black coated	
Front panel:	nt panel: AIMgSI0.5 F22	



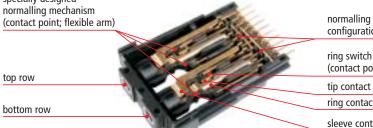


configuration bars ring switch (contact point) tip contact (2x)


ring contact (2x) sleeve contact (2x)

732-901-9488

www.neutrikusa.com

# EasyPatch Patch Panels

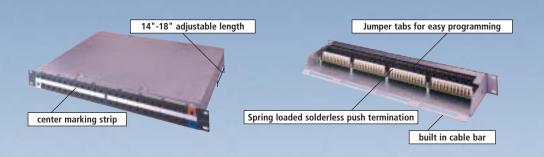



# NPP-TB Series

The "Easy Patch" is a durable compactly designed 19" rack mount (19" x 1U) series of patch panels. Each unit is made in a galvanized metal housing and includes a built in cable tray. The front panel has a removable center marking strip and individual snap on tabs for color coding.

This system is programmable with jumpers in any of 6 different configurations and offers 4 flexible grounding possibilities to fit your needs. Fast rear connections are either solderless spring loaded gold terminal blocks or Elco/Edacs (both for fully normalled versions). A half-normalled solder lug version is also available.

**GROUNDING**: The flexible grounding possibilities are:

Each channel ground is a separate connection with its corresponding Individual: cable shield.

Group: To group channels together you must link the shields of the common ground bar by the solder joints and then you must cut the tracks

> at the point where you want to form the group. The ground bar must be connected to one common cable shield.

Connects all shields to the common ground bar. The ground bar must be connected to one common cable shield.

Chassis ground is connected to the common ground. This is the Chassissame as for common grounding but with an additional connection to the common ground of the patch panel chassis using a jumper.

The "Easy Patch" is both analog and digital capable. The standard unit is 7" in depth and the expandable units measures from 14" - 18" to fit various rack spaces.

In addition to color coded labeling tabs in the ten resistor colors, accessories include a dust cover and a rear extension bar for strain relief for the 7" versions (the extendible versions come with a cover and the rear extension bar).

All these features lead to a TB patch panel that is cost effective, labor saving, easy to program and durable for your application.

WIRING: The "Easy Patch" offers four wiring choices.

STANDARD: Spring loaded push terminals with a gas tight connection The spring loaded terminal blocks make it fast and easy to connect, change, or replace a wire. NO soldering or screws necessary. Simply depress the white key and insert the stripped wire into the space to make a gas tight connection. Stranded wire up to AWG 20 (0.5 mm<sup>2</sup>)

OPTIONS: 90 pin Elco/Edac connectors (-14" versions only) – female terminations\*


Solder lug -HN <half-normalled> versions only


and solid wire to AWG 18 (0.75 mm<sup>2</sup>) is possible.


\*Pin outs available upon request

# **Configuration Chart**

Switching: Programmable for all commonly used configurations.

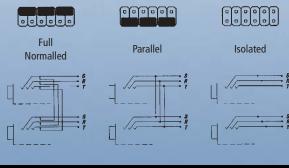





### **ORDERING INFORMATION - NPP-TB Series** 2 x 24 NJ6TB-V Jacks, Mates w/ 1/4" BP0316 & MIL-P-642/2 plugs Configuration NPP-TB Spring loaded Push terminations Programmable for all commonly used configurations NPP-TB-HN Solder contacts Half Normalled Bottom Row only NPP-TB-14PT Spring loaded Push terminations Programmable for all commonly used configurations Elco/Edac 90 pin female Programmable for all commonly used configurations

	ORDERING INFORMATION – Accessories
NPP-LB	Channel ID snap on tabs. Available in ten resistor colors. Sold individually, or in multi-color packages.
NPP-C	Metal dust cover for 7" standard versions (extendible versions come with cover).
NPP-S	Rear extension bar to act as strain relief for large cables (standard with extendible versions).
NKTB patch cables	TB patch cables available in red or black in lengths of 1', 18", 2', or 3'. See Patch Cable section for details (page 29).

# **TECHNICAL DATA:**

Electrical	
Connector contact resistance:	$<$ 10 m $\Omega$
Switch contact resistance:	$<$ 15 m $\Omega$
Insulation resistance:	>1GΩ @ 500 V dc
Dielectric strength:	1000 V dc
Cross talk between stereo pairs:	>120 dB @ 1 kHz: 600Ω terminated
Cross talk between two adjacent channels:	>120 dB @ 1 kHz

Mechanical			
Insertion / withdrawal:	• Force: 10N / 8N	• Lifetime: >5000 insertion / withdrawal cycl	es
Dimensions:	485 (W) x 44 (H) mm (19" x 1U), rack m	ount	
Depth:	• 139.7 mm (5.5") for Standard	• 355.6 mm (14") for "-14" version	• 457.2 mm (18")

Environmental			
Temperature range:	-30°C to +80°C		

Material	
Housing, Cable bar, Dust cover:	Steel, AlZn galvanized
Front Panel:	Pocan B 3225
Coding tabs:	Grilon PVZ-15H


# **Wiring Variants**



90 pin Elco/Edac







Spring loaded push terminals (PH)

-HN solder lug

732-901-9488

www.neutrikusa.com

Accessories



# Adapters

Neutrik® offers a variety of adapters that will reliably interface with various connector combinations. These adapters are available in either wired or non-wired versions depending on your needs. Made with the same rugged diecast shells of our "X" series connectors, these adapters offer the professional look, compact design and durability that you've come to expect from Neutrik®.

ORDE	RING IN	FORMATION -	Adapter
Туре	Part No.	Connection Typ	e
		Part 1	Part 2
Gender Conversion  Part #s as shown are UNWIRED. For wired	NA3FF NA5FF NA5FM NA3MM NA5MM NA3M5F NA3F5M	XLR 3 pin female XLR 5 pin female XLR 5 pin female XLR 3 pin male XLR 5 pin male XLR 5 pin male XLR 3 pin male XLR 3 pin female	XLR 3 pin female XLR 5 pin female XLR 5 pin male XLR 3 pin male XLR 5 pin male XLR 5 pin female XLR 5 pin female XLR 5 pin female
adapters add "/W" to part # - i.e. NA3FF/W.	NA3FM NA3F5F NA3M5M	XLR 3 pin female XLR 3 pin female XLR 3 pin female XLR 3 pin male	XLR 5 pin male XLR 3 pin male XLR 5 pin female XLR 5 pin male
Extension	NA3FJ NA3MJ NA2FP* NA2MP* NA3FP NA3MP	XLR 3 pin female XLR 3 pin male XLR 3 pin female XLR 3 pin male XLR 3 pin female XLR 3 pin male	stereo 1/4" locking jack stereo 1/4" locking jack mono 1/4" plug mono 1/4" plug stereo 1/4" plug stereo 1/4" plug
Part #s as shown are UNWIRED. For wired adapters add "/W" to part # - i.e. NA3FJ/W.	NA2MBNC* NA2FPMF* NA2MPMF*	XLR 3 pin female XLR 3 pin male XLR 3 pin female XLR 3 pin male XLR 3 pin female XLR 3 pin female XLR 3 pin male	BNC socket BNC socket phono (RCA-) jack phono (RCA-) jack phono (RCA-) plug phono (RCA-) plug
Threaded Adapters	NAM1 NAM4 NAM5	M17x1 outside thread M17x1 outside thread 3/8" inside thread	outside thread 5/8" 27 UNS inside thread 5/8" 27 UNS outside thread 5/8" 27 UNS

\*For adapters wired according to IEC268-12 (pin 2 is signal, pins 1 & 3 wired to ground) add "/W" to part # - i.e. NA2FP/W

Other pinouts and special wiring options may be available as special order. Minimums may be required. Contact Neutrik USA, Inc.® for details.



# Goosenecks

Neutrik® offers strong, flexible, noiseless goosenecks in three lengths to fit a variety of applications. Our goosenecks are available individually or in sets which include a locking female XLR for theft proof mic connections and a series of threaded adapters. The interior of the gooseneck is a stainless steel spiral. The exterior features a non-reflective black finish.

OF	RDERIN	G INFORMATI	ON – Gooseneck
Made of: CuZn39Pb2; stainless non-reflective black m			
Туре	Part No.	Connection Type	Comments
Gooseneck	GN18	M17x1 inside thread at both ends	230 mm/9.055" length
	GN36	M17x1 inside thread at both ends	360 mm/14.173" length
	GN50	M17x1 inside thread at both ends	500 mm/19.685" length
Gooseneck set	GNS18	M17x1 inside thread at both ends	Sets include in addition to GN 18, 36 or 50
	GNS36	M17x1 inside thread at both ends	<ul> <li>black NC3FX-spec. XLR female with securing ring and fixing screw to prevent theft and noise</li> </ul>
	GNS50	M17x1 inside thread at both ends	<ul> <li>black adapter M17x1 outer to 5/8" 27 UNS inner thread with through hole and cable outlet.</li> <li>thread adapter M17x1 outer – 3/8" outer thread</li> </ul>
Adapters v <u>NOT</u> sold s		ets are	<ul> <li>thread adapter 3/8" inner – 5/8"</li> <li>27 UNS outer thread (see Pt# NAM5)</li> </ul>
Flange	GF1		Panel-mounting kit: Flange Ø 63,50 mm including mounting screw M17x1, 13 mm length
Mounting screw	MSG		M17x1 13 mm length



# Modules

Our complete line of modules allows the user to design their own adapters to suit a variety of specific needs. Based on the Neutrik® "X" series connector system, these modules offer professional and reliable connections. These modules will accept the Neutrik® NTE series of transformers.

	ORDERIN	IG INFORMA	TION – Mo	dules
Туре	Part No.	Connection T	уре	Comments
		Тор	Bottom	
Coupler	VMX	M17x1 outside	M17x1 outside	all metal distance sleeve keeps XLR insert in place
Housing	NM3FXI	XLR female	M17x1 outside	
Housing	NM3MXI	XLR male	M17x1 outside	
Housing	NM2P	Mono 1/4" plug	M17x1 inside	
Housing	NM3P	Stereo 1/4" plug	M17x1 inside	
Housing	NM3J	Stereo 1/4" locking jack	M17x1 inside	
Switch module	SM2/2	M17x1 outside	M17x1 outside	2x2 switch positions
Housing	KM	M17x1 inside	M17x1 inside	long version
Housing	KMX	M17x1 inside	M17x1 inside	short version



# Wallplates

Riveted offset mounting in stainless steel plates to allow for printing or etching, NEUTRIK USA, Inc.® offers our 3 pin male and/or female D-L-1 series receptacles, 1/4" locking jacks, or NL\*MP Speakon® receptacles as standard wallplates. Mounting in a standard single electrical box outlet, screws are included and the dual configurations can be used either vertically or horizontally.

RDERING INFORMATION - Wal	lplates
Description	Part #
NL2MP Speakon® receptacle	102L
NC3FD-L-1- receptacle*	103F
NC3MD-L-1 receptacle*	103M
NJ3FP6C to 1/4" locking jack	103P
NL4MP Speakon® receptacle	104L
NL2MP Speakon® receptacles	202L
NC3FD-L-1- receptacles*	203F
NC3FD-L-1 and NC3MD-L-1 receptacle*	203FM
NC3MD-L-1 receptacles*	203M
NJ3FP6C to 1/4" locking jack	203P
NL4MP Speakon® receptacle	204L
	Description  NL2MP Speakon® receptacle  NC3FD-L-1- receptacle*  NC3MD-L-1 receptacle*  NJ3FP6C to 1/4" locking jack  NL4MP Speakon® receptacle  NL2MP Speakon® receptacles  NC3FD-L-1- receptacles*  NC3FD-L-1 and NC3MD-L-1 receptacle*  NC3MD-L-1 receptacles*  NJ3FP6C to 1/4" locking jack

\*Special order of 4-7 pin receptacles available. Minimums required. Contact Neutrik USA, Inc.® for details."

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

Accessories







# AES/EBU Digital Audio Adapters

In addition to the original NADITBNC adapters, two new versions of this series are now available. The BNC to XLR 3-pin receptacle (male and female) and the BNC to XLR cable end (male and female). This series was developed to provide an excellent impedance transformer at a reasonable cost for meeting the needs between analog and digital applications. Their use also allows for longer cable runs via unbalanced coaxial lines rather than twisted pair cables that present high attentuation values at the relevant frequencies.


# The criteria for these adapters are:


- Impedance matching between 110 Ohms and 75 Ohms.
- Transition of balanced/unbalanced circuit (balun).
- Electrical isolation (optional, not necessary).
- Attentuation for use of analog video distribution equipment (optional). Reduction of hum and noise.

ORDERING INFORMATION – AES/EBU digital Audio Adapter			
Part #	Description		
NADITBNC-F	Female XLR Receptacle (3 pin) 110 Ohm Input to BNC Receptacle 75 Ohm Output.		
NADITBNC-M	BNC Receptacle 75 Ohm Input to Male XLR Receptacle (3 pin)110 Ohm Output.		
NADITBNC-FX	Female XLR cable end 3-pin 110 Ohm Input to BNC Receptacle 75 Ohm Output.		
NADITBNC-MX	BNC Receptacle 75 Ohm Input to Male XLR cable end 3-pin 110 Ohm Output.		

SP	ECIFICATIONS
Frequency Band:	0.1 MHz to 15 MHz
VSWR/Return Loss:	<1.30 / >17.7 dB up to 10 MHz
Insertion Loss:	<0.3dB @ 0.1 to 10 MHz
Maximum Voltage/Max. Power:	5 Vp-p / 250 mW

# Schematics











# Transformers

Neutrik® is pleased to offer a series of professional audio transformers for use in a variety of audio, studio, or line input applications. Featuring very low distortion and

excellent frequency response these transformers are also available in our NP2C plug to convert mic levels to guitar inputs.

Transformer Specifications									
Part #	Ripple	Min. load							
	20Hz-20kHz	THD ≤1%	THD ≤3%	impedance					
NTE1	max. –1dB	1.2 V	1.4 V	200Ω					
NTE4	max. –1dB	1.6 V	2.2 V	1 kΩ					
NTE10/3	max. –2dB	1.2 V	1.6 V	10 kΩ					

	Turns Ratio	Winding resis	tance (DC)	Primary inductance	
		Primary	Secondary	@ 30Hz	
NTL1	1:1 ± 5%	$1.1 \text{ k}\Omega \pm 5\%$	$1.35 \text{ k}\Omega \pm 5\%$	≥150 H	
NTM1	1:1 ± 10%	$85\Omega \pm 3\%$	$105\Omega \pm 5\%$	≥8 H	
NTM4	1:4 ± 10%	$105\Omega \pm 3\%$	1.25 kΩ $\pm$ 5%	≥8 H	

ORDERING INFORMATION - Transformers								
Туре	Part No.	Conn	ection Type		Comments			
Application		Source/load Impedances in $\Omega$	Turns Ratio (prim : sec)	Max, input voltage 1% THD @60Hz:				
Audio input	NTE1	200 / 200	1:1	1.2 V	free wires			
Audio input	NTE4	1k / 10K	1:4	400 mV rms	free wires			
Audio input	NTE10/3	10k / 50K	1:3:10	500 mV rms	free wires			
1/4" phone plug	NP2C-T10AA(-BAG)	200 / 50K	1:10	120 mV rms	with built-in transformer to convert microphone levels to guitar inputs			
				1% THD @30Hz:				
Studio line	NTL1	600 / 600	1:1	6 V rms	PCB mounting, fully Mu-metal shielded			
Studio mic input	NTM1	200 / 200	1:1	1.5 V rms	PCB mounting, fully Mu-metal shielded			
Studio mic input	NTM4	200 / 10K	1:4	1.2 V rms	PCB mounting, fully Mu-metal shielded			

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

	Modules	Adapters	
Electrical			
Contact resistance:			
• XLR: <3 mΩ	X	Χ	
• Jack: <6 mΩ	X	Χ	
Insulation resistance: >2GΩ	X	Х	
Dielectric strength: 1.5 kV dc	X	Х	
Mechanical			
Max. wire size:			
XLR: 2.5 mm <sup>2</sup> / 14 AWG	Χ	Χ	
Jack: 1.5 mm² / 16 AWG	Χ	Χ	
Environmental			
Temperature range: -20°C to +65°C	Х	Х	
Solderability: complies with IEC 68-2-20	Х	Х	
Materials			
Shell: ZnAl4Cu1, galv. Cu/Ni	X	X	
Insert / Insulation: PA 6.6 30% GR	X	X	
Contacts:			
• female / jack: CuSn6, gal 2µm Ag	Χ	X	
• male / plug: CuZn39Pb3, galv 2µm Ag	Χ	X	

## Transformers NTE1, 4, 10/3 NTL1: typical application NTL1, NTM1, 4 90 150 pF 680 p 680p 15 kD yellow ": NTE10/3 only 50 Plante (MR) HAVE JUBY Patto (16) THO NTL F THO NTM 1 THO NTM 4 LOVE NTL 1 Level NYM : Level WIRE insut from [N] REQUESTS (HE) 10 100 10 100 10 100


Neutrik® offers color coded accessories for easy identification and match up for a variety of our connectors. Available in the ten resistor colors these accessories can be used on our standard 1/4" plugs or Neutricon® connectors (BSP); our "X" series cable connectors (BSX and XCR); our "D" series,

1/4" locking jack and NL\*MP connectors (DSS); or our TT size single plugs (BSTP). The PCR and XCR rings can be added to cables which are already soldered. Mix and match - you'll never make the wrong connection again when using our color coding system.


ORDERING INFORMATION – Color coded Accessories								es	_	_	
Part #'s	Description	-WT (White)	-GR (Gray)	-V (Violet)	-BL (Blue)	-GN	-Y	-0 (Orange)	-R (Red)	-BR (Brown)	-BLK (Black)
ACRF-Color	Colored rings for "A/B" series female receptacl	es		$\square$						$\square$	$\bigcirc$
ACRM-Color	Colored rings for "A/B" series male receptacles	0	0	0	Ø	Q	O	Ø	Ø	Q	
BSP-Color	Colored boots for all NP*C 1/4" plugs and Neutricon®	Ţ									
BSTP-Color	Colored sleeves for NP3TT-P Bantam size plugs					1					
BSX-Color	Colored boots for X series cable connectors					V					
BSZ-Color	Colored boots for Easycon series										
DBA	Blank plate for all "D" Series sized cutouts	1									
DSS-Color	Colored labeling plates for all D Series size receptacles										
PCR-Color	Colored ring with flat label surface for NP*C series 1/4" plugs		0	0	$\bigcirc$	0		$\bigcirc$	$\bigcirc$	$\bigcirc$	0
SCDF	Rubber covers – for female receptacles of "D", "D-L-1", and "DM3" Series	Q		SCI	DM			male recept M3", and			O
XCR-Color	Colored ring with flat label surface for X series cable connectors	$\bigcirc$	0	0	0	0			0	0	0

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

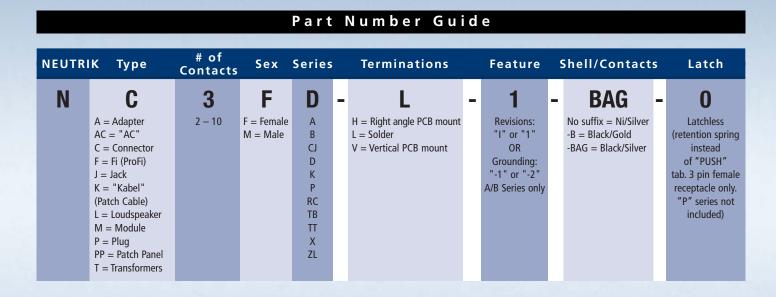

# All standard inserts are black Contact Arrangements Mating Side \*Switchcraft\* equivalent This insert is colored gray.

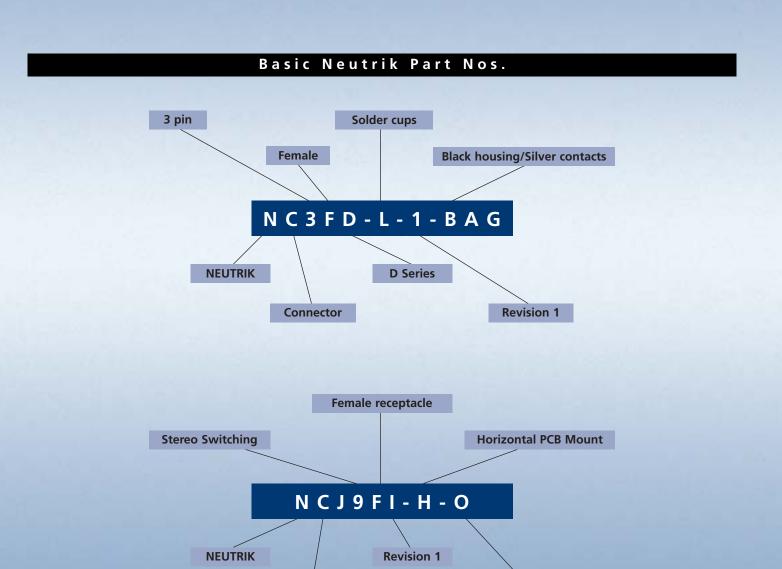

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

Latchless

Connector/Jack (combo)

102L	35	GNS-36	34	NA3MJ/W	34	NC3FBHL-2-B	8	NC3FX-BAG	2	NC3MX-14-B-D	2
103F	35	GN-50	34	NA3MM	34	NC3FBHL-2-O	8	NC3FX-BAG-D	2	NC3MX	2
103M	35	GNS-50	34	NA3MM/W	34	NC3FBHR-1	8	NC3FXCC	3	NC3MX-B	2
103P	35	KM	35	NA3MP	34	NC3FBHR-1-O	8	NC3FX-D	2	NC3MX-B-D	2
104L	35	KMX	35	NA3MP/W	34	NC3FBHR-2	8	NC3FX-HD	4	NC3MX-BAG	2
202L	35	MBC	26	NA4LJ	20	NC3FBHR-2-B	8	NC3FX-HD-B	4	NC3MX-BAG-D	2
203F	35	MBS	26	NA5FF	34	NC3FBHR-2-O	8	NC3FX-S	4	NC3MXCC	3
203FM	35	MC-8	25	NA5FF/W	34	NC3FBV-1	8	NC3FX-S-B	4	NC3MX-D	2
203M	35	MC-8Ni	25	NA5FM	34	NC3FBV-1-B	8	NC3FX-SPEC.	4	NC3MX-HD	4
203P	35	MI-8	25	NA5FM/W	34	NC3FBV-1-O	8	NC3MAH	8	NC3MX-HD-B	4
204L	35	MIF	26	NA5MM	34	NC3FBV-2	8	NC3MAHL	8	NC4FAH	9
3FD-H-I	11	MIM	26	NA5MM/W	34	NC3FBV-2-B	8	NC3MAH-O	8	NC4FAV	9
3FD-H-I-B	11	MPC	26	NAC3FCA	23	NC3FBV-2-O	8	NC3MAHR	8	NC4FBH	9
3FD-H-I-0	11	MPF12-H	26	NAC3FCB	23	NC3FBY	8	NC3MAV	8	NC4FBV	9
3FD-L-I	11	MPF12-V	26	NAC3MPA	23	NC3FBY-B	8	NC3MAV-0	8	NC4FBV-B	9
3FD-L-I-B	11	MPM12-H	26	NAC3MPB	23	NC3FD-H	11	NC3MAY	8	NC4FD-L-1	12
3FD-L-I-O	11	MPM12-V	26	NAC3MM	23	NC3FD-H-B	11	NC3MBH	8	NC4FD-L-1-B	12
3FD-V-I	11	MPS	26	NADITBNC-F	36	NC3FD-H-BAG	11	NC3MBH-B	8	NC4FD-L-1-BAG	12
3FD-V-I-B	11	MRF	26	NADITBNC-FX	36	NC3FD-H-BAG-O	11	NC3MBHL	8	NC4FDM3-H	13
3FD-V-I-O	11	MRM	26	NADITBNC-M	36	NC3FD-H-O	11	NC3MBHL-B	8	NC4FDM3-H-BAG	13
3MD-H-I	11	MSC	26	NADITBNC-MX	36	NC3FD-L	11	NC3MBHR	8	NC4FP-1	12
3MD-H-I-B	11	MSG	34	NAM1	34	NC3FD-L-B	11	NC3MBHR-B	8	NC4FP-1-B	12
3MD-L-I	11	MSRC	26	NAM4	34	NC3FD-L-BAG	11	NC3MBV	8	NC4FP-1-BAG	12
3MD-L-I-B		NA2FBNC		NAM5	34			NC3MBV-B	8	NC4FRC	3
3MD-V-I	11		34 34	NBS	24	NC3FD-L-BAG-O NC3FD-L-O	11	NC3MBY	8	NC4FRC-B	3
		NA2FBNC/W		-							
3MD-V-I-B	11	NA2FP	34	NC3FAH 4	8	NC3FD-L-1	12	NC3MBY-B	8	NC4FRC-BAG	3
ACRF-@	39	NA2FP/W	34	NC3FAH-1	8	NC3FD-L-1-B	12	NC3MD-H	11	NC4FX	2
ACRM-@	39	NA2FPMF	34	NC3FAH-1-0	8	NC3FD-L-1-BAG	12	NC3MD-H-B	11	NC4FX-B	2
BB1	25	NA2FPMF/W	34	NC3FAH-2	8	NC3FD-L-1-BAG-0	12	NC3MD-H-BAG	11	NC4FX-BAG	2
BC1	25	NA2FPMM	34	NC3FAH-2-0	8	NC3FD-L-1-0	12	NC3MD-L	11	NC4FX-HD	4
BP1	25	NA2FPMM/W	34	NC3FAH-O	8	NC3FD-V	11	NC3MD-L-B	11	NC4FX-HD-B	4
BS1	25	NA2MBNC	34	NC3FAHL-1	8	NC3FD-V-B	11	NC3MD-L-BAG	11	NC4MAH	9
BSL-WR	20	NA2MBNC/W	34	NC3FAHL-1-0	8	NC3FD-V-BAG	11	NC3MD-L-1	12	NC4MAV	9
BSP-@	39	NA2MP	34	NC3FAHL-2	8	NC3FD-V-BAG-O	11	NC3MD-L-1-B	12	NC4MBH	9
BSTP-@	39	NA2MP/W	34	NC3FAHL-2-0	8	NC3FD-V-O	11	NC3MD-L-1-BAG	12	NC4MBH-B	9
BSX-@	39	NA2MPMF	34	NC3FAHR-1	8	NC3FEZ-AU	5	NC3MD-V	11	NC4MBV	9
BSZ@	39	NA2MPMF/W	34	NC3FAHR-1-0	8	NC3FEZ-B	5	NC3MD-V-B	11	NC4MBV-B	9
DBA	39	NA2MPMM	34	NC3FAHR-2	8	NC3FEZY-AU	5	NC3MD-V-BAG	11	NC4MD-L-1	12
DH-NF	11	NA2MPMM/W	34	NC3FAHR-2-0	8	NC3FEZY-B	5	NC3MEZ-AU	5	NC4MD-L-1-B	12
DH-NF-BAG	11	NA3FF	34	NC3FAV	8	NC3FP-1	12	NC3MEZ-B	5	NC4MD-L-1-BAG	12
DH-NF-BAG-M3	11	NA3FF/W	34	NC3FAV-1	8	NC3FP-1-B	12	NC3MEZY-AU	5	NC4MDM3-H	13
DH-NF-BAG-O	11	NA3FJ	34	NC3FAV-1-0	8	NC3FP-1-BAG	12	NC3MEZY-B	5	NC4MDM3-H-BAG	13
DH-NF-M3	11	NA3FJ/W	34	NC3FAV-2	8	NC3FP-1-BAG-0	12	NC3MP	12	NC4MP	12
DH-NF-M3-O	11	NA3FM	34	NC3FAV-2-0	8	NC3FPP	13	NC3MP-B	12	NC4MP-B	12
DH-NF-O	11	NA3FM/W	34	NC3FAV-O	8	NC3FRC	3	NC3MP-BAG	12	NC4MP-BAG	12
DH-NM	11	NA3FP	34	NC3FAY	8	NC3FRC-B	3	NC3MPP	13	NC4MRC	3
DH-NM-BAG	11	NA3FP/W	34	NC3FBH-1	8	NC3FRC-BAG	3	NC3MRC	3	NC4MRC-B	3
DH-NM-BAG-M3	11	NA3F5F	34	NC3FBH-1-B	8	NC3FX-1	2	NC3MRC-B	3	NC4MRC-BAG	3
DH-NM-M3	11	NA3F5F/W	34	NC3FBH-1-O	8	NC3FX-1-BAG	2	NC3MRC-BAG	3	NC4MX	2
DHP	11	NA3F5M	34	NC3FBH-2	8	NC3FX-1-D	2	NC3MX-1	2	NC4MX-B	2
DSS-@	39	NA3F5M/W	34	NC3FBH-2-B	8	NC3FX-14	2	NC3MX-1-BAG	2	NC4MX-BAG	2
FI-8	25	NA3M5F	34	NC3FBH-2-O	8	NC3FX-14-B	2	NC3MX-1-D	2	NC4MX-HD	4
GF1	34	NA3M5F/W	34	NC3FBHL-1	8	NC3FX-14-B-D	2	NC3MX-14	2	NC4MX-HD-B	4
GN-18	34	NA3M5M	34	NC3FBHL-1-B	8	NC3FX14-D	2	NC3MX-14-B	2	NC5FAH	9
GNS-18	34	NA3M5M/W	34	NC3FBHL-1-O	8	NC3FX	2	NC3MX-1-BAG-D	2	NC5FAV	9
GN-36	34	NA3MJ	34	NC3FBHL-2	8	NC3FX-B	2	NC3MX-14-D	2	NC5FBH	9

NCEEDII D	0	NCCEDCS	2	NCIEFLII	10	NIZTO A DI	20	NI OMD II	21
NC5FBH-B	9	NC6FRCS	3	NCJ5FI-H	19	NKTT04-BL	29	NL8MD-H	21
NC5FBV	9	NC6FRCS-B	3	NCJ5FI-H-O	19	NKTT04-BLK	29	NL8MD-H-BAG	21
NC5FBV-B		NC6FRCS-BAG	3	NCJ5FI-S	19	NKTT04-BLK-AU	29	NL8MD-V	21
NC5FD-L-1	12	NC6FX P	2	NCJ5FI-S-O	19	NKTT04-GN	29	NL8MD-V-BAG	21
NC5FD-L-1-B	12	NC6FX-B	2	NCJ5FI-V	19	NKTT04-R	29	NL8MM	21
NC5FD-L-1-BAG	12	NC6FX-BAG	2	NCJ5FI-V-O	19	NKTT04-R-AU	29	NL8MPR	21
NC5FDM3-H	13	NC6FXS	2	NCJ6FI-H	19	NKTT04-Y	29	NL8MPR-BAG	21
NC5FDM3-H-BAG	13	NC6FXS-B	2	NCJ6FI-H-O	19	NKTT05-BL	29	NM2P	35
NC5FDM3-V-BAG	13	NC6FXS-BAG	2	NCJ6FI-S	19	NKTT05-BLK	29	NM-3	24
NC5FP-1	12	NC6FX-HD	4	NCJ6FI-S-O	19	NKTT05-BLK-AU	29	NM3FXI	35
NC5FP-1-B	12	NC6FX-HD-B	4	NCJ6FI-V	19	NKTT05-GN	29	NM3J	35
NC5FP-1-BAG	12	NC6MD-L-1	12	NCJ6FI-V-O	19	NKTT05-R	29	NM3MXI	35
NC5FPP	13	NC6MD-L-1-B	12	NCJ9FI-H	19	NKTT05-R-AU	29	NM3P	35
NC5FRC	3	NC6MD-L-1-BAG	12	NCJ9FI-H-O	19	NKTT05-Y	29	NMC	24
NC5FRC-B	3	NC6MDS-L-1	12	NCJ9FI-S	19	NKTT1-BL	29	NP2C	17
NC5FRC-BAG	3	NC6MDS-L-1-B	12	NCJ9FI-S-O	19	NKTT1-BLK	29	NP2C-B	17
NC5FX	2	NC6MP	12	NCJ9FI-V	19	NKTT1-BLK-AU	29	NP2C-BAG	17
NC5FX-B	2	NC6MP-B	12	NCJ9FI-V-O	19	NKTT1-GN	29	NP2C-BAG-D	17
NC5FX-BAG	2	NC6MP-BAG	12	NCJ10FI-H	19	NKTT1-R	29	NP2CM	17
NC5FX-HD	4	NC6MRC	3	NCJ10FI-H-O	19	NKTT1-R-AU	29	NP2CM-B	17
NC5FX-HD-B	4	NC6MRC-B	3	NCJ10FI-S	19	NKTT1-Y	29	NP2CM-R	17
NC5MAH	9	NC6MRC-BAG	3	NCJ10FI-S-O	19	NKTT2-BL	29	NP2CM-I	17
NC5MAV	9	NC6MRCS	3	NCJ10FI-V	19	NKTT2-BLK	29	NP2C-T10AA	17,37
NC5MBH	9	NC6MRCS-B	3	NCJ10FI-V-O	19	NKTT2-BLK-AU	29	NP2C-T10AA-BA	G 17,37
NC5MBH-B	9	NC6MRCS-BAG	3	NF2CB/2	28	NKTT2-GN	29	NP2L	17
NC5MBV	9	NC6MX	2	NF-3	24	NKTT2-R	29	NP2L-BAG	17
NC5MBV-B	9	NC6MX-B	2	NJ2FD-V	15	NKTT2-R-AU	29	NP2RCS	17
NC5MD-L-1	12	NC6MX-BAG	2	NJ3FC6	15	NKTT2-Y	29	NP3C	17
NC5MD-L-1-B	12	NC6MXS	2	NJ3FC6-BAG	15	NKTT12-BL	29	NP3C-B	17
NC5MD-L-1-BAG	12	NC6MXS-B	2	NJ3FD-V	15	NKTT12-BLK	29	NP3C-BAG	17
NC5MDM3-H	13	NC6MXS-BAG	2	NJ3FP6C	15	NKTT12-BLK-AU	29	NP3C-D	17
NC5MDM3-H-BAG	13	NC6MX-HD	4	NJ3FP6C-BAG	15	NKTT12-GN	29	NP3CM	17
NC5MDM3-V-BAG	13	NC6MX-HD-B	4	NJ3FP6C-P	15	NKTT12-R	29	NP3CM-B	17
NC5MP	12	NC7FD-L-1	12	NJ3TTA-4-HNB	31	NKTT12-R-AU	29	NP3CM-R	17
NC5MP-B	12	NC7FD-L-1-B	12	NJ3TTA-4-HNT	31	NKTT12-Y	29	NP3CM-I	17
NC5MP-BAG	12	NC7FD-L-1-BAG	12	NJ3TTA-4-FN	31	NL-FASTON	20-21	NP3F-H	24
NC5MRC	3	NC7FP-1	12	NJ3TTA-4-P	31	NL2FC	21	NP3F-V	24
NC5MRC-B	3	NC7FP-1-B	12	NJ3TTA-4-I	31	NL2MD-H	21	NP3M-H	24
NC5MRC-BAG	3	NC7FF-1-B	3	NJ5FD-V	15	NL2MD-H	21	NP3M-V	24
		NC7FRC-B							
NC5MX NC5MX-B	2		3	NJ6FD-V	15 15	NL2MP NL4FC	21	NP3RCS NP3TB-B	17 17
		NC7FRC-BAG		NJ6TB-V			21	NP3TB-B	
NC5MX-BAG	2	NC7FX	2	NKTB03-BLK	29	NL4FC-B	21		17
NC5MX-HD	4	NC7FX-B	2	NKTB03-R	29	NL4MD-H	21	NP3TM-B	17
NC5MX-HD-B	4	NC7FX-BAG	2	NKTB04-BLK	29	NL4MD-H-2	21	NP3TM-R	17
NC6FD-L-1	12	NC7FX-HD	4	NKTB04-R	29	NL4MD-V	21	NP3TT-2	17
NC6FD-L-1-B	12	NC7FX-HD-B	4	NKTB05-BLK	29	NL4MD-V-1	21	NP3TT-P-B	17
NC6FD-L-1-BAG	12	NC7MD-L-1	12	NKTB05-R	29	NL4MD-V-2	21	NP3TT-P-B-AU	17
NC6FDS-L-1	12	NC7MD-L-1-B	12	NKTB1-BLK	29	NL4MMX	21	NP3TT-P-R	17
NC6FDS-L-1-B	12	NC7MRC	3	NKTB1-R	29	NL4MP	21	NP3TT-R-AU	17
NC6FP-1	12	NC7MRC-B	3	NKTT03-BL	29	NL4MP-2	21	NPPA-TT-PT-PH	30
NC6FP-1-B	12	NC7MRC-BAG	3	NKTT03-BLK	29	NL4MP-B	21	NPPA-TT-E56	30
NC6FP-1-BAG	12	NC7MX	2	NKTT03-BLK-AU	29	NL4MPR	21	NPPA-TT-S	30
NC6FPS-1	12	NC7MX-B	2	NKTT03-GN	29	NL4MPR-V	21	NPP-C	33
NC6FRC	3	NC7MX-BAG	2	NKTT03-R	29	NL4MP-ST	21	NPP-LB	33
NC6FRC-B	3	NC7MX-HD	4	NKTT03-R-AU	29	NL4MP-UC	21	NPP-S	33
NC6FRC-BAG	3	NC7MX-HD-B	4	NKTT03-Y	29	NL8FC	21	NPP-TB	32

NR3M 24 NSC 24 NTE1 37 NTE4 37 NTE103 37 NTL1 37 37 NTM4 PC1 25 PCR@ 39 PP1 25 PS1 25 25 RP-81 RP-8Ni 25 SC-8 25 SC-8Ni 25 SC-8W 25 SCDF SCDM 39 SCREW-2.5M SCREW-2.9M 9,19,21 SD-NLP SM2/2 35 SR-8 25 SR-8W 25 35 VMX XCR-@ 39 @ denotes product available in ten resistor colors as follows.

NPP-TB-HN NPP-TB-14E

NPP-TB-14PT

NPS NR3F 32 32

24


24

# Color Black Brown Red (2) - R (3) Orange - 0 Yellow Green Blue Violet - V Grey (8) - GR (9) White - WT

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

"A/B" Series	8 – 10
Adapters	34, 36, & 38
Color Coded Accessories	39
Combo	19
"D" Series	11 & 14
Digital XLR	3 & 7
"D-L-1" Series	12 & 14
"DM3" Series	13 – 14
EasyCon Series	5 & 7
EasyPatch Patch Panels	30 – 33
FX-S Series	4 & 7
FX-Spec	4 & 7
Goosenecks	34
Jacks	15 – 16
MiniCon®	26 – 27
Modules	35 & 38
NanoCon®	24 & 27
Neutricon <sup>®</sup>	25 & 27
"P" Series	12 & 14
"PP" Series	13 – 14
Patch Cables	29
Plugs	17 – 18
PowerCon®	23
Profi®	28
"RC" Series	3 & 6
Speakon®	20 – 22
Transformers	37 – 38
Wallplates	35
"X" Series	2 & 6
"X-1" Series	2 & 6
"X-14" Series	2 & 6
"X-HD" Series	4 & 6
XLR Accessories	39

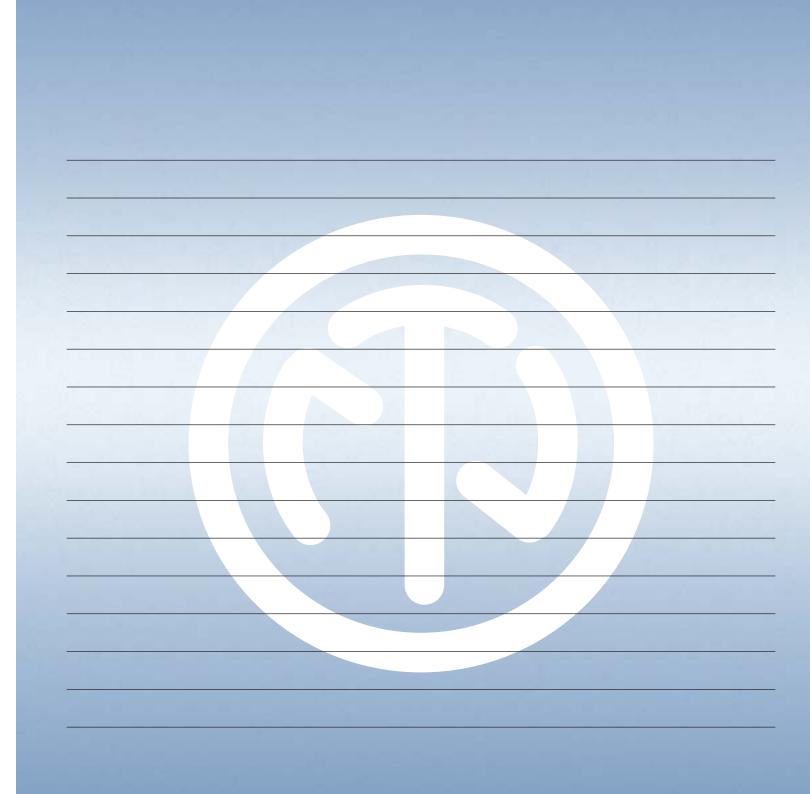

7 3 2 - 9 0 1 - 9 4 8 8

www.neutrikusa.com

# PARENT:

Neutrik AG Im alten Riet 34 FL-9494 Schaan Liechtenstein 011 423 237 2424 FAX 011 423 232 5393 neutrik@neutrik.com www.neutrik.com

# SUBSIDIARIES:

Neutrik UK, Ltd. Columbia Business Park Sherbourne Avenue Ryde, Isle of Wight P033 3QD, Great Britian 011 44 1983 811 441 FAX 011 44 1983 811 439 sales@neutrik.co.uk Neutrik Vertriebs GmbH Felix-Wankel-Strasse 1 DE-85221 Dachau Germany 011 49 8131 2808 90 FAX 011 49 8131 2808 30 info@neutrik.de

Neutrik Ltd., Japan Sakoh Building Sendagaya 1-11-4 Sibuya-Ku Tokyo 151 Japan 011 81 3 3663 4733 FAX 011 81 3 3663 4796 mail@neutrik.co.jp Neutrik Zurich AG Steinackerstrasse 35 CH-8902 Urdorf Switzerland 011 41 736 5010 FAX 011 41 736 5011 neutrik@neutrik.ch