G3VN–HR MOS FET Relays SOP 6-pin, High-current and Low-ON-resistance Type

MOS FET Relays in SOP 6-pin packages that achieve the low ON resistance and high switching capacitance of a mechanical relay

- Load voltage: 20 V, 40 V, 60 V, 80 V, or 100 V
- 20-V Relay: Continuous load current of 2.5 A (5 A) max.*
- 40-V Relay: Continuous load current of 2.5 A (5 A) max.*
- 60-V Relay: Continuous load current of 2.3 A (4.6 A) max.*
- 80-V Relay: Continuous load current of 1.25 A (2.5 A) max.*
- 100-V Relay: Continuous load current of 1.4 A (2.8 A) max.*
- * Values in parentheses are for connection C.

RoHS Compliant

■Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & Measurement equipment

■Package (Unit:mm, Average)

SOP 6-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-<u>000</u>

1.	Load Voltage	2.	Contact form
•••	Loud Follage		00111101111

2 : 20 V

4 : 40 V

6:60 V

8:80 V

10:100 V

Security equipment

Industrial equipment

Power circuit

- 1 : 1a (SPST-NO)
 - 4. Additional function R: Low ON resistance

Amusement equipment

3. Package H : SOP 6-pin

4. Additional functions 5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

	Contact		Load voltage		load current alue) *	Stick packaging		Tape packaging		
Package	form		(peak value) *	Connection A, B C		Model	Minimum package quantity	Model	Minimum package quantity	
			20 V	2.5 A	5 A	G3VM-21HR		G3VM-21HR(TR)	-	
			40 V	2.5 A	54	G3VM-41HR		G3VM-41HR(TR)		
SOP6	1a (SPST-NO)	IO) Surface-mounting Terminals		60 V	2.3 A	4.6 A	G3VM-61HR	75 pcs.	G3VM-61HR(TR)	2,500 pcs.
(3131-110)	(01 01 110)		80 V	1.25 A	2.5 A	G3VM-81HR		G3VM-81HR(TR)	1	
			100 V 1.4 A	2.8 A	G3VM-101HR		G3VM-101HR(TR)	1		

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

G3VM-DHF



Note: The actual product is marked differently from the image shown here.

■Absolute Maximum Ratings (Ta = 25°C)

	ltem		Symbol	G3VM-21HR	G3VM-41HR	G3VM-61HR	G3VM-81HR	G3VM-101HR	Unit	Measurement conditions
LED forward current		IF	30		50	30	mA			
Input	LED forward current reduction rate		∆IF/°C	-0.3			-0.5	-0.3	mA/°C	Ta≥25°C
-	LED reverse voltage	ge	VR			5	•	•	V	
	Connection tempe	rature	TJ			125			°C	
	Load voltage (AC	peak/DC)	VOFF	20	40	60	80	100	V	
		Connection A		2500		2300	1250	1400	mA	Connection A:
	Continuous load	Connection B	lo			2300	1250			AC peak/DC
nt		Connection C		5000		4600	2500	2800		Connection B and C: DC
Output	ON current	Connection A		-33.3		-30.7	-12.5	-18.7		G3VM-81HR : Ta ≥ 25°C
Ŭ	reduction rate	Connection B	∆lo/°C	-					mA/°C	Others : Ta ≥50°C
		Connection C		-66.6	-66.7	-61.3	-25.0	-37.3		
	Pulse ON current		lop	7.	.5	7	3.75	4	Α	t=100 ms, Duty=1/10
Connection temperature			TJ			125			°C	
Dielectric strength between I/O (See note 1.)		VI-0			1500			Vrms	AC for 1 min	
An	Ambient operating temperature		Та	-40 to +85 -20 to +85 -40 to +85				°C	With no icing or	
An	nbient storage temp	erature	Tstg		-55 to +125		-40 to +125	-55 to +125	°C	condensation
Sc	Idering temperature	9	-			260	•	•	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

Connection Diag	
Connection A	$\begin{bmatrix} 1 & 6 \end{bmatrix} - \begin{bmatrix} Load \\ 0 \end{bmatrix} = \begin{bmatrix} 2 & 5 \end{bmatrix} = \begin{bmatrix} 0 & AC \\ 0 & DC \end{bmatrix}$
Connection B	
Connection C	

Multi-contact-pair
High-current and
Small and High High-dielectric Lan-output-gaptization
Small and High Certified Models with

High-load-voltage
(Za, Zb, and Tab)
Low-Obresistance
dielectric-strength
Strength
Current-limiting
and une-Obresistance
load-voltage
Strength
Stre

SOP

G3VM-□HR

■Electrical Characteristics (Ta = 25°C)

_	ltem		Symbol		G3VM-21HB	G3VM-41HR	G3VM-61HB	G3VM-81HR	G3VM-101HB	Unit	Measurement conditions
-			Cymbol	Minimum	00111-21111	1.18	dovin-onini	1.0	1.18	onn	measurement conditions
	LED forward	LED forward voltage		Typical	1.33			1.15	1.33	v	IF=10 mA
		-		Maximum	1.48			1.3	1.48	1	
	Reverse current		IR	Maximum	10					μA	VR=5 V
Input	Capacitance between terminals		Ст	Typical		70		15	70	pF	V=0, f=1 MHz
드	Trigger LED 1	orward	IFT	Typical	-	0.4		2	0.4	mA	G3VM-21HR/41HR/61HR/101HR : Io=100 mA
	current		161	Maximum		3		5	3	IIIA	G3VM-81HR : lo=1250 mA
	Release LED current	forward	IFC	Minimum		0.1		0.2	0.1	mA	IOFF=10 μA
		Connection A			0.02	0.03	0.04	0.11	0.1		G3VM-21HR/41HR/61HR :
		Connection B		Typical	0.01	0.015	0.02	0.06	0.05		I⊧=5 mA, Io=2 A (A or B connections)
	Maximum resistance with output ON	Connection C	Ron		0.005	0.008	0.01	0.03	0.025	Ω	Io=4 A (C connections), t < 1 s G3VM-81HR : IF=5 mA.
		Connection A		Maximum	0.05	0.06	0.07	0.15	0.2		Io=Continuous load current ratings
ŧ		Connection B			0.025	0.03	0.04	0.08	0.1		G3VM-101HR : IF=5 mA,
Output		Connection C				-		0.04	-		Io=Continuous load current ratings, t < 1 s
		rent leakage when the JLEAK -		Typical	-			1.2	-	nA	G3VM-21HR/41HR/61HR/101HR : VoFF=Load voltage ratings
	relay is open			Maximum	10			1.5	10	114	G3VM-81HR : Voff=20 V, Ta=50°C
	Capacitance	Capacitance between		Typical	1000			460	1000	-	G3VM-21HR/41HR/61HR/101HR :
	terminals		COFF	Maximum		-		1000	-	pF	V=0, f=1 MHz G3VM-81HR : V=0, f=100 MHz
	Capacitance between I/O terminals		Ci-o	Typical			0.8			pF	f=1 MHz, Vs=0 V
	sulation resista		BI-0	Minimum			1000			MΩ	V⊦o=500 VDC, RoH≤60%
be	between I/O terminals		ni-0	Typical	10 ⁸				MΩ		VP0=300 VDC, H011200 /8
т.	rn-ON time		ton	Typical	1.5 1.0			2.0	1.0	ms	G3VM-21HR :
			ION	Maximum	5.0		3.0	5.0	IF=5 mA, RL=200 Ω, VDD=10 V (See note 2.)		
т.	um-OFF time		TOPE	Typical	0.1	0.1 0.15 0.7			0.15		G3VM-41HR/61HR/81HR/101HR : IF=5 mA, RL=200 Ω, VDD=20 V
Tum-OFF time		IUFF	Maximum			1.0				(See note 2.)	

Note: 2. Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-21HR	G3VM-41HR	G3VM-61HR	G3VM-81HR	G3VM-101HR	Unit
Load voltage (AC peak/DC)	Vdd	Maximum	20	40	60	64	100	V
		Minimum	5					
Operating LED forward current	IF	Typical	10	7.	5	-	7.5	mA
		Maximum	20			30	20	
Continuous load current (AC peak/DC)	lo	Maximum	20	00	1800	1250	1100	
Ambient operating temperature	Та	Minimum			ő			
Ambient operating temperature	id	Maximum		65		60	65	0

Spacing and Insulation

Item	Minimum	Unit
Creepage distances	4.0	
Clearance distances	4.0	mm
Internal isolation thickness	0.1	

G3VM-□HR

G3VM-

MOS FET Relavs

80 100

(Average value)


0.2

(Average value)

80 100

0.4


Engineering Data

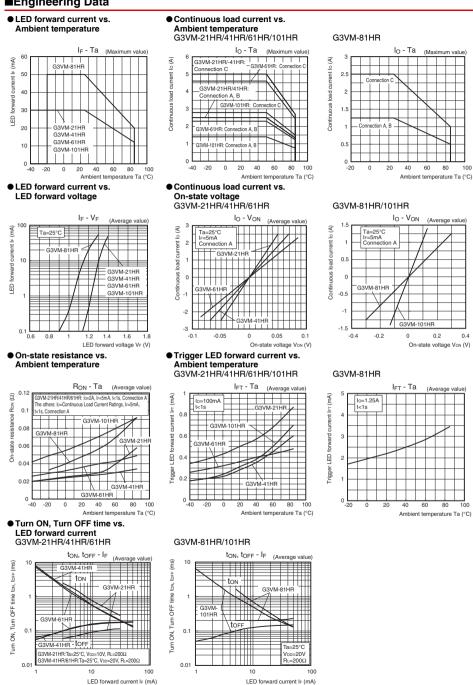

G3VM-DHP

G3VM-

Engineering Data

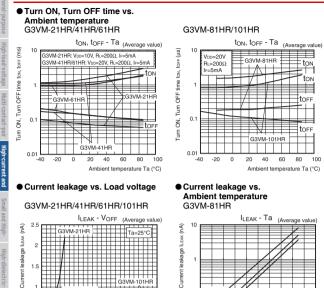

G3VM-101H

Load voltage VOFF (V)

=80V

VOFF=50V

VOFF=20V

Ambient temperature Ta (°C)

0.1

0.01


0 20 40 60 80 100

G3VM-61HR

-41HB

Output terminal capacitance vs. Load voltage G3VM-21HR/41HR/61HR/101HR





1

0.5

0

0 20 40 60 80 100

G3VM−⊟HR

Appearance / Terminal Arrangement / Internal Connections

Appearance

SOP (Small Outline Package)



Note: 1. The actual product is marked differently from the image shown here.


Note: 2. "G3VM" does not appear in the model number on the Relay. Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark

is from a pin on the mold.

Terminal Arrangement/Internal Connections (Top View)



Dimensions (Unit: mm)

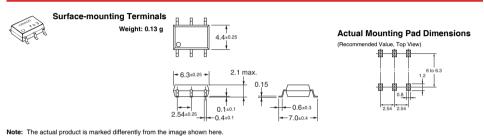

■Approved Standards

UL recognized		
Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■Safety Precautions

Refer to the Common Precautions for All MOS FET Relays for precautions that apply to all MOS FET Relays.