


G3VM-61QR

MOS FET Relays S-VSON 4-pin, Low-output-capacitance and Low-ON-resistance Type (with Low C × R)

World's smallest class* New S-VSON Package with Low Output Capacitance and Low ON Resistance

- Load voltage: 60 V.
- Low C × R = 13.2 pF·Ω, C_{OFF} (standard) = 12 pF, R_{ON} (standard) = 1.1 Ω
- High Ambient operating temperature: -40°C to +110°C

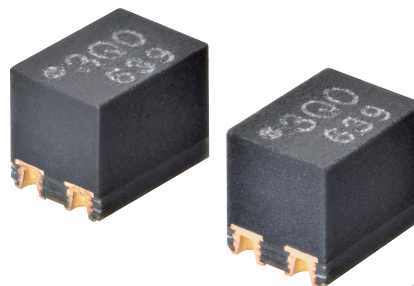

NEW

Note: The actual product is marked differently from the image shown here.

* As of June 2017 Survey by OMRON.


RoHS Compliant

Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

Package (Unit : mm, Average)

S-VSON4 pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

- | | | |
|--|--|---|
| 1. Load Voltage
6: 60 V | 2. Contact form Package type
1: 1a (SPST-NO) | 3. Package type
Q: S-VSON 4 pin |
| 4. Additional functions
R: Low On-resistance | 5. Other informations
When specifications overlap, serial code is added in the recorded order. | |

Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
S-VSON4	1a (SPST-NO)	Surface-mounting Terminals	60 V	400 mA	G3VM-61QR	1 pc.	G3VM-61QR (TR05)	500 pcs.

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: When ordering tape packing, add "(TR05)" (500 pcs/reel) to the model number. Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut. Tape-cut S-VSON is packaged without humidity resistance. Use manual soldering to mount them. Refer to common precautions.

G3VM-61QR

S-VSON

Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-61QR	Unit	Measurement conditions
Input	LED forward current	IF	30	mA	
	LED forward current reduction rate	$\Delta I_F / ^\circ C$	-0.3	mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	6	V	
	Connection temperature	TJ	125	°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	60	V	
	Continuous load current (AC peak/DC)	Io	400	mA	
	ON current reduction rate	$\Delta I_o / ^\circ C$	-4	mA/°C	Ta ≥ 25°C
	Pulse ON current	I _{op}	1.2	A	t = 100 ms, Duty = 1/10
Dielectric strength between I/O (See note 1.)		VI-o	500	V _{rms}	AC for 1 min
Ambient operating temperature		Ta	-40 to +110	°C	With no icing or condensation
Ambient storage temperature		T _{stg}	-40 to +125	°C	
Soldering temperature		-	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-61QR	Unit	Measurement conditions	
Input	LED forward voltage	VF	Minimum	1.1	V IF = 10 mA	
			Typical	1.21		
			Maximum	1.4		
	Reverse current	IR	Maximum	10	μA	VR = 5 V
	Capacity between terminals	CT	Typical	30	pF	V = 0, f = 1 MHz
	Trigger LED forward current	IFT	Maximum	3	mA	Io = 100 mA
Release LED forward current	IFC	Minimum	0.1	mA	I _{OFF} = 10 μA	
Output	Maximum resistance with output ON	RON	Typical	1.1	Ω	IF = 5 mA, t < 1s, Io = 400 mA
			Maximum	1.5		
	Current leakage when the relay is open	I _{LEAK}	Maximum	1000 (1)	nA	V _{OFF} = 60 V (V _{OFF} = 50 V)
Capacity between terminals	COFF		Typical	12	pF	V = 0, f = 100 MHz, t < 1 s
			Maximum	20		
Capacity between I/O terminals		CI-O	Typical	0.9	pF	f = 1 MHz, Vs = 0 V
Insulation resistance between I/O terminals		RI-O	Typical	10 ⁸	MΩ	VI-o = 500 VDC, RoH ≤ 60%
Turn-ON time		t _{ON}	Maximum	0.5 (0.25)	ms	IF = 5 mA, RL = 200 Ω, V _{DD} = 20 V (IF = 10 mA, RL = 200 Ω, V _{DD} = 20 V) (See note 2.)
Turn-OFF time		t _{OFF}	Maximum	0.3 (0.3)		

Note: 2. Turn-ON and Turn-OFF Times

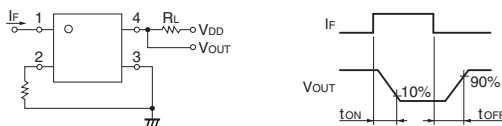

Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol	G3VM-61QR	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48
		Minimum	5
Operating LED forward current	IF	Typical	7.5
		Maximum	20
		Minimum	5
Continuous load current (AC peak/DC)	Io	Maximum	400
Ambient operating temperature	Ta	Minimum	-20
		Maximum	100

Engineering Data


● LED forward current vs. Ambient temperature

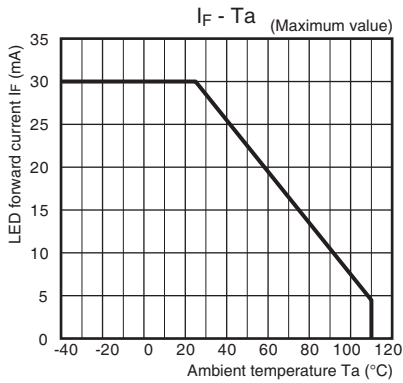


● Continuous load current vs. Ambient temperature

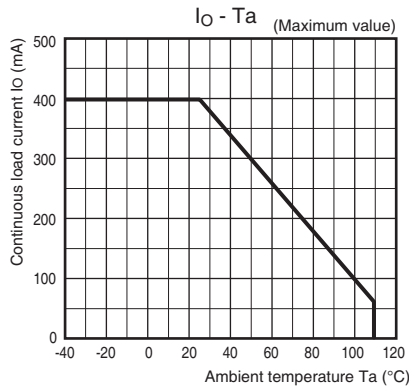


● LED forward current vs. LED forward voltage

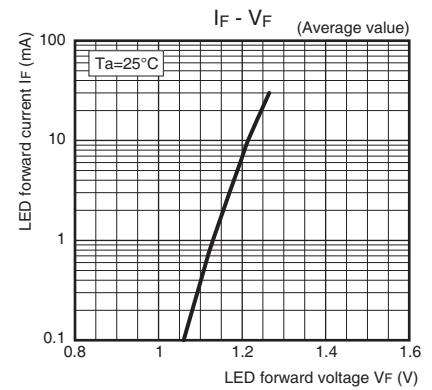


● Continuous load current vs. On-state voltage

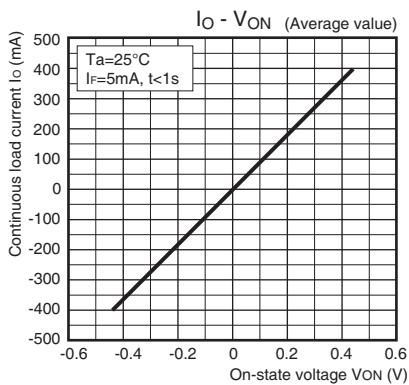


● On-state resistance vs. Ambient temperature

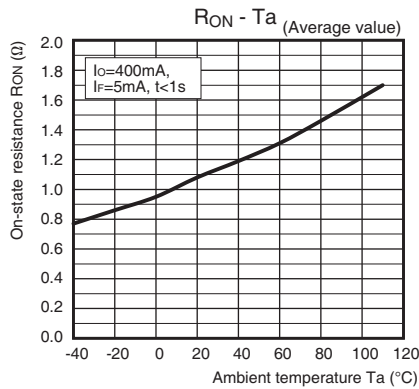


● Trigger LED forward current vs. Ambient temperature

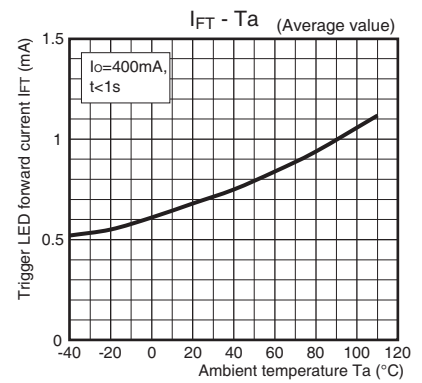


● Turn ON, Turn OFF time vs. LED forward current

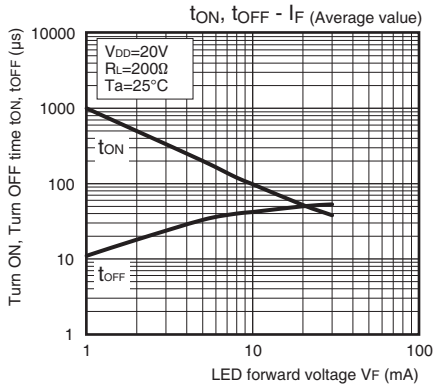


● Turn ON, Turn OFF time vs. Ambient temperature

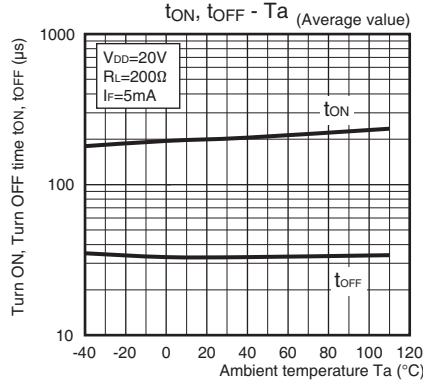


● Current leakage vs. Load voltage

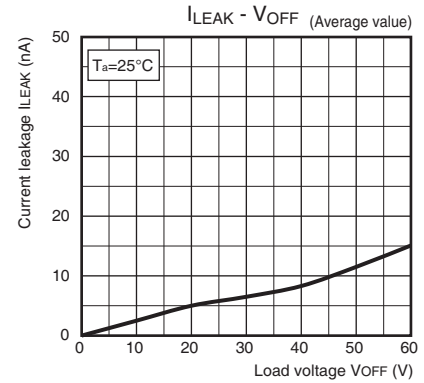

● Current leakage vs. Ambient temperature

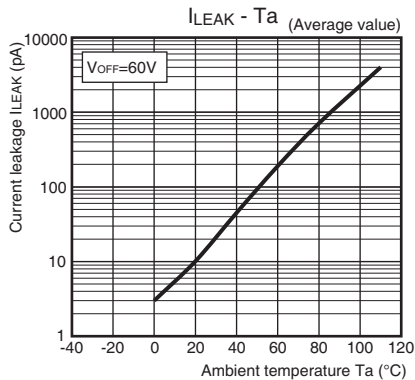


● Output terminal capacitance vs. Load voltage

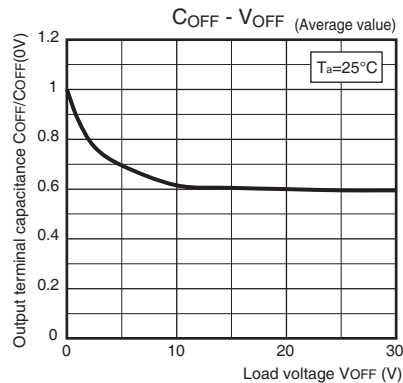

Appearance / Terminal Arrangement / Internal Connections

Appearance

S-VSON (Super-Very Small Outline Non-leaded)
S-VSON4 pin




* Actual model name marking for each model

Model	Marking
G3VM-61QR	6Q0

Note 1. The actual product is marked differently from the image shown here.
2. "G3VM" does not appear in the model number on the Relay.



Terminal Arrangement/Internal Connections (Top View)



Dimensions (Unit: mm)


Surface-mounting Terminals

Weight: 0.01 g

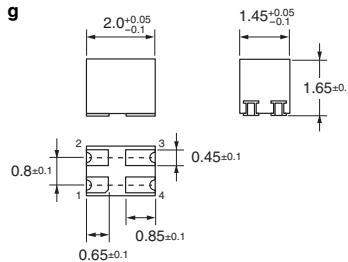

Actual Mounting Pad Dimensions

(Recommended Value, Top View)

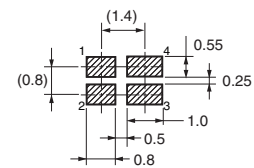

Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Note: The actual product is marked differently from the image shown here.

Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K291-E1-02
1217(0717)(O)