

# PS-1208 12 Volt 0.8 AH

**Rechargeable Sealed Lead Acid Battery** 



We've Got The Power.™




- \ \	
Contract of the	Certificate of BC000

# Terminals: (mm)

• Leads terminated with free hanging AMP. INC MATE-N-LOK connector, Socket housing 1-480318-0 mates with pin housing 1-480319-0. Lead length: 6.50" (168mm)

## Physical Dimensions: in (mm)

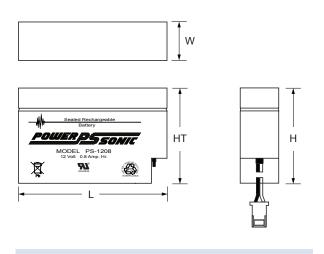

### L: 3.78 (96) W: 0.98 (25) H: 2.44 (62) HT: 2.44 (62)

Tolerances are +/- 0.04 in. (+/- 1 mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

# Features


- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

### **Performance Specifications**


Nominal Voltage	12 volts (6 colls)			
Nominal Capacity				
20-hr. (40mA to 10.50 volts)				
10-hr. (72mA to 10.50 volts)	0.72 AH			
5-hr. (130mA to 10.20 volts)	0.65 AH			
1-hr. (480mA to 9.00 volts)	0.48 AH			
15-min. (1.5A to 9.00 volts)	0.38 AH			
Approximate Weight	0.77 lbs. (0.35 kg)			
Energy Density (20-hr. rate) 1	.06 W-h/in3 (64.81 W-h/l)			
Specific Energy (20-hr. rate) 12.	47 W-h/lb (27.49 W-h/kg)			
Internal Resistance (approx.)	n/a			
Max Discharge Current (7 Min.)	2.4 amperes			
Max Short-Duration Discharge Current (	10 Sec.) n/a			
Shelf Life (% of nominal capacity at 68°F (20°C)				
1 Month				
3 Months				
6 Months				
Operating Temperature Range				
Charge	4°F (-20°C) to 122°F (50°C)			
Discharge4	0°F (-40°C) to 140°F (60°C)			
Case	ABS Plastic			
Power-Sonic Chargers	PSC-12300FC			

#### www.power-sonic.com

# POWER

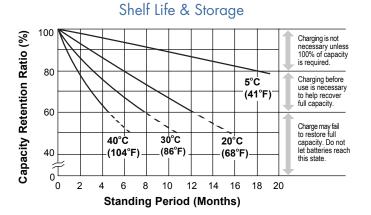

### Discharge Time vs. Discharge Current

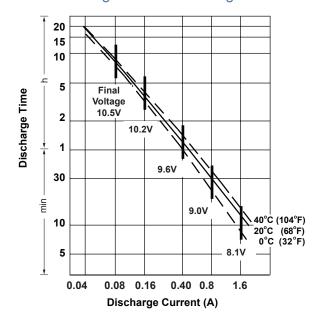

# Charging

Cycle Applications: Limit initial current to 240mA. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 8mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.


"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.


# Charging

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.


Discharge Characteristics	Disc	harge	Characteristics
---------------------------	------	-------	-----------------

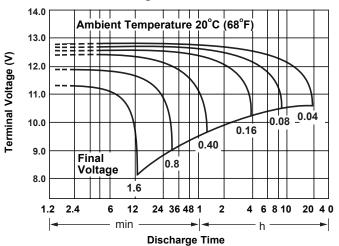

## Life Characteristics in Stand-By Use

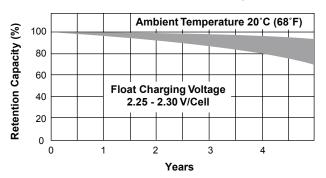

### Life Characteristics in Cyclic Use

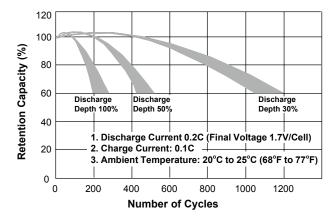

# Charging

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

0616 1M

<b>Contact Information</b>			www.power-sonic.com
DOMESTIC SALES Tel: +1-619-661-2020 Fax: +1-619-661-3650 national-sales@powersonic.com	CUSTOMER SERVICE Tel: +1-619-661-2030 Fax: +1-619-661-3648 customerservice@powersonic.com	TECHNICAL SUPPORT Tel: +1-619-661-2020 Fax: +1-619-661-3648 support@power-sonic.com	INTERNATIONAL SALES Tel: +1-650-364-5001 Fax: +1-650-366-3662 international-sales@power-sonic.com
CORPORATE	□ ⊃FFICE • 7550 Panasonic Way • San Diego, CA 9	2154 • USA • Tel: +1-619-661-2020 • Fax	: +1-619-661-3650

© 2013. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners