

- Electrical insulation
- Small, lightweight
- Vibration-proof
- Temperature rating to +135°C

## TC Cap

Single wall, heat-shrinkable end caps

## Raychem

TC cap is a lightweight, single wall, heat-shrinkable end cap designed to insulate and terminate dead-end electrical wires, connectors and other electrical


equipment. The product may be installed on a temporary or permanent basis and is vibration resistant. It has a high dielectric strength and is resistant to common

chemicals and solvents. The TC cap has a shrink ratio of 2:1.

### Temperature rating

Operating temperature range:	-55°C to +135°C
Minimum shrink temperature:	+110°C
Minimum full recovery temperature:	+125°C

### Ordering information

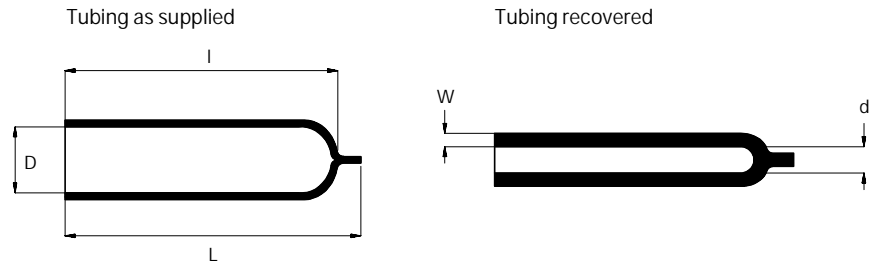

Inside diameter		Length		Wall thickness		Colour	Ordering description
D (min) Expanded as supplied	d (max) Recovered after heating	l (min) Open barrel as supplied	L (nom) Overall length as supplied	W (nom) Total wall recovered after heating			
mm	mm	mm	mm	mm			
1.6	0.8	10.2	19.1	0.51	White	TC-CAPS-4001-9	
3.2	1.3	14.0	25.4	0.64	Red	TC-CAPS-4003-2	
6.4	2.5	14.0	28.6	0.69	Grey	TC-CAPS-4005-8	

The largest size that will recover snugly over the component to be covered should be ordered.

The wall thickness of the cap will be less than specified if recovery is restricted during shrinkage.

---

# TC Cap

---

## Approvals

---

UL E85381

---

## Specifications

---

Raychem Specification (see SCD).

---

Installation instructions available on request.

---

Material Safety Data Sheet available on request.

---

Raychem and TC Cap are trademarks of Tyco Electronics Corporation.

*All of the above information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics makes no warranties as to the accuracy or completeness of the information and disclaims any liability regarding its use. Tyco Electronics only obligations are those in the Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising from the sale, resale, use or misuse of the product. Tyco Electronics Specifications are subject to change without notice. In addition Tyco Electronics reserves the right to make changes in materials or processing, without notification to the Buyer, which do not affect compliance with any applicable specification.*

---

**Tyco/Electronics/Raychem**  
306 Constitution Drive  
Menlo Park, CA 94025  
U.S.A  
Tel: (650)-361 3333

**Tyco/Electronics/Raychem**  
Cheney Manor Industrial Estate  
Swindon, Wiltshire SN2 2QE  
UK  
Tel: (44)-1793 573762

**Tyco/Electronics/Raychem**  
3816 Noborito, Tama-ku  
Kawasaki 214-8533  
Japan  
Tel: (81)-44 9005102

**Tyco/Electronics/Raychem**  
No. 26 Ang Mo Kio Ind. Park  
Singapore 569507  
Tel: (65)-4866151