





DESCRIPTION

The SP540 is a single-pole, single-throw, normally open multipurpose DC solid-state relay and is designed to replace electromechanical relays in critical applications that require fast switching and solid state reliability. It is composed of an AlGaAs LED optically coupled to a Photo Diode Array that drives an Low On-resistance Enhancement Type DMOS transistor on the output, providing a high load current rating.


FEATURES

- High Continuous Load Current Rating (1mA)
- Low On-resistance (2 ohms MAX)
- Low Input control power consumption (1.5mA TYP)
- High input-to-output isolation
- · Long life/high reliability

OPTIONS/SUFFIXES*

NOTE: Suffixes listed above are not included in marking on device for part number identification.

SCHEMATIC DIAGRAM

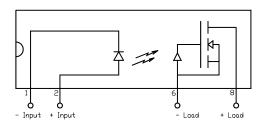

APPLICATIONS

- Multiplexers
- · Meter reading systems
- Data Acquisition
- Medical equipment
- Battery monitoring
- Home/Safety security systems

ABSOLUTE MAXIMUM RATINGS*

PARAMETER	UNIT	MIN	TYP	MAX
Storage Temperature	°C	-55		120
Operating Temperature	°C	-40		85
Continuous Input Current	mA			40
Transient Input Current	mA			400
Reverse Input Control Voltage	V	6		
Output Power Dissipation	W			1.2

^{*}The values indicated are absolute stress ratings. Functional operation of the device is not implied at these or any conditions in excess of those defined in electrical characteristics section of this document. Exposure to Absolute Ratings may cause permanent damage to the device and may adversely affect reliability.

APPROVALS

- UL / C-UL Approved: File #E90096
- CSA Approved Certificate #LR 111581-1





ELECTRICAL CHARACTERISTICS - 25°C


PARAMETER	UNIT	MIN	TYP	MAX	TEST CONDITIONS
INPUT SPECIFICATIONS					
LED Forward Voltage	V		1.2	1.5	If = 10mA
LED Reverse Voltage	V	6	12		Ir = 10uA
Turn-On Current	m A		1.5	5	Io = 1A
Turn-Off Current	m A		0.5		
OUTPUT SPECIFICATIONS					
Blocking Voltage	V	60			Io = 1uA
Continuous Load Current	m A			1000	If = 5mA
On-Resistance	Ω		0.35	2	Io = 1A
Leakage Current	μА		0.05	1	Vo = 60V
Output Capacitance	рF		25	50	Vo = 25V, f = 1.0MHz
Offset Voltage	m V			0.2	If = 5mA
COUPLED SPECIFICATIONS					
Isolation Voltage	V _{rms}	3750			T = 1 minute
Turn-On Time	m s		0.5	1	If = 5mA, Io = 1A
Turn-Off Time	m s		0.1	1	If = 0mA, Io = 1A
Isolation Resistance	GΩ	100			
Coupled Capacitance	рF		3		
Contact Transient Ratio	V/ μs	2000	7000		dV = 50V





PERFORMANCE DATA

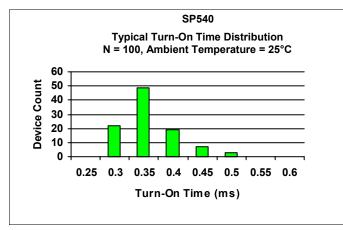


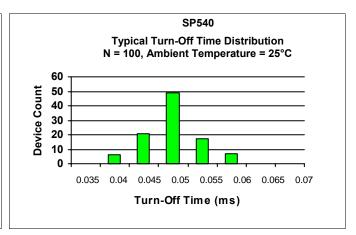

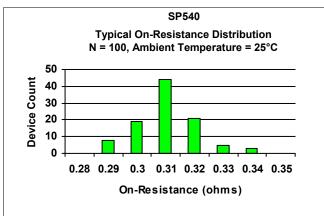

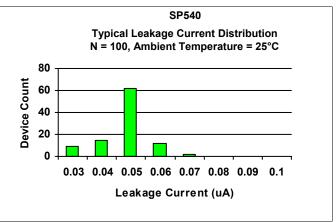

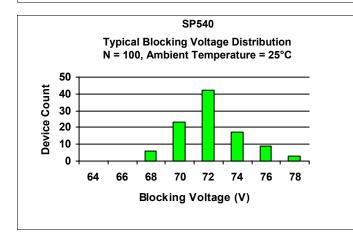


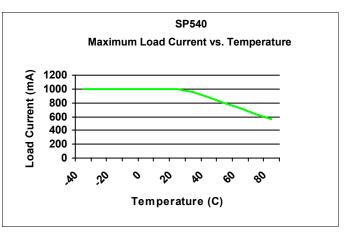




MECHANICAL DIMENSIONS

16 PIN SINGLE IN-LINE PACKAGE



END VIEW

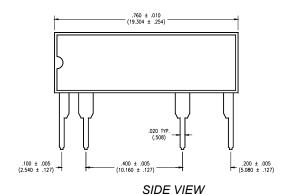





DISCLAIMER

Solid State Optronics (SSO) makes no warranties or representations with regards to the completeness and accuracy of this document. SSO reserves the right to make changes to product description, specifications at any time without further notice. SSO shall not assume any liability arising out of the application or use of any product or circuit described herein. Neither circuit patent licenses nor indemnity are expressed or implied.

Except as specified in SSO's Standard Terms & Conditions, SSO disclaims liability for consequential or other damage, and we make no other warranty, expressed or implied, including merchantability and fitness for particular use.

LIFE SUPPORT POLICY

SSO does not authorize use of its devices in life support applications wherein failure or malfunction of a device may lead to personal injury or death. Users of SSO devices in life support applications assume all risks of such use and agree to indemnify SSO against any and all damages resulting from such use. Life support devices are defined as devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when used properly in accordance with instructions for use can be reasonably expected to result in significant injury to the user, or (d) a critical component in any component of a life support device or system whose failure can be reasonably expected to cause failure of the life support device or system, or to affect its safety or effectiveness.