

## Data sheet | Item number: 2059-302/998-403



SMD PCB terminal block; 0.5 mm<sup>2</sup>; Pin spacing 3 mm; 2-pole; PUSH WIRE®; in tape-and-reel packaging; 0,50 mm<sup>2</sup>; white



[www.wago.com/2059-302/998-403](http://www.wago.com/2059-302/998-403)



Color:  

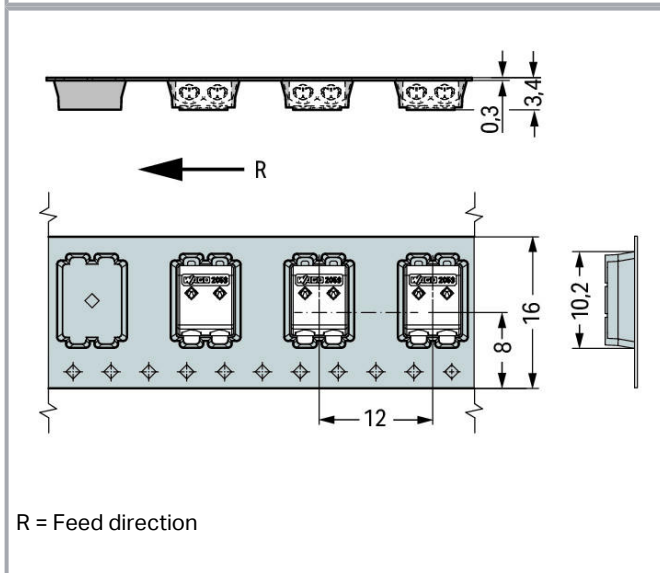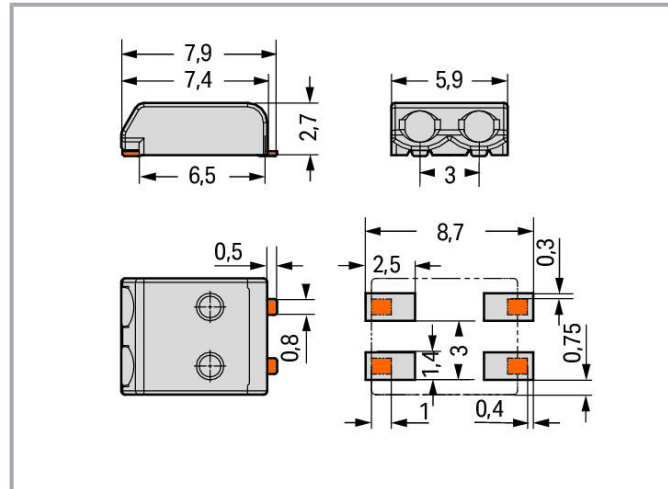

### Item description

- SMD PCB terminal blocks with PUSH WIRE® connection technology
- Push-in termination of solid conductors
- Easy conductor removal via operating tool
- Height of just 2.7 mm

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



- Assemble terminal blocks without pole loss
- Available in tape-and-reel packaging for automated assembly

**Note:**

Application notes:

Suitable for lead-free, reflow-soldering profiles per DIN EN 61760-1 and IEC 60068-2-58 up to max. 260°C peak temperature. Due to application-specific variables (component configuration and orientation, type of soldering machine, solder paste), trial runs are recommended to ensure product and process compatibility under actual manufacturing conditions.

**Note:**

Depending on reflow soldering temperatures and times, color deviations may occur. These deviations will have no impact on functionality.

**Recommendation:**

Recommendation for stencil:

Material thickness: 150 µm; Pattern layout identical to solder pad layout

**Data**

**Electrical data**

**Ratings per IEC/EN**

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	63 V
Rated surge voltage (III/3)	2.5 kV
Rated voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Nominal voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV
Rated current	3 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

**Ratings per UL**

Approvals per	UL 1059
---------------	---------

**Ratings per UL**

Rated voltage UL 1977	250 V
-----------------------	-------

Subject to changes. Please also observe the further product documentation!



Rated current UL 1977	3 A
-----------------------	-----

### Ratings per CSA

Approvals per	CSA
---------------	-----

### Connection data

Connection technology	PUSH WIRE®
Actuation type	Operating tool
Solid conductor	0.14 ... 0.34 mm <sup>2</sup> / 26 ... 22 AWG
Note (conductor cross-section)	For conductors (26 AWG) that are not rigid enough, the clamping unit must be opened using an operating tool.
Strip length	4 ... 5.5 mm / 0.16 ... 0.22 inch
Conductor connection direction to PCB	0°
Pole No.	2
Solid conductor 2	0.5 mm <sup>2</sup> / 20 AWG
Note (conductor cross-section) 2	No reconnection of smaller conductor cross-sections (0.5 mm <sup>2</sup> /20 AWG)
Strip length 2	6 ... 7.5 mm / 0.24 ... 0.3 inch
Total number of connection points	2
Total number of potentials	2
Number of connection types	1
Number of levels	1

### Physical data

Pin spacing	3 mm / 0.118 inch
Width	5.9 mm / 0.232 inch
Height	2.7 mm / 0.106 inch
Depth	7.9 mm / 0.311 inch
Reel diameter of tape-and-reel packaging	330 mm
Tape width	16 mm

### PCB contact

PCB Contact	SMD
-------------	-----

### Material data

Color	white
-------	-------

Subject to changes. Please also observe the further product documentation!

Material group	I
Insulation material	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Copper alloy
Contact plating	tin-plated
Weight	0.2 g

### Environmental requirements





Limit temperature range	-60 ... +105 °C
-------------------------	-----------------

### Commercial data

Product Group	33 (Printed Circuit)
Packaging type	BOX
Country of origin	CH
GTIN	4055143082686
Customs tariff number	85369010000

### Approvals / Certificates


#### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL-7680
	CCA DEKRA Certification B.V.	EN 60838	NTR NL-7720
	KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-103560
	KEMA/KEUR DEKRA Certification B.V.	EN 60838	71-106226

#### UL-Approvals



Subject to changes. Please also observe the further product documentation!






Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 1977	E45171

## Compatible products

### tools

	<b>Item no.: 2059-189</b> Operating tool; made of insulating material; for 2059 Series	<a href="http://www.wago.com/2059-189">www.wago.com/2059-189</a>
	<b>Item no.: 206-859</b> Operating tool; for 2059 Series; multicoloured	<a href="http://www.wago.com/206-859">www.wago.com/206-859</a>

### General accessories

	<b>Item no.: 2059-902</b> Board-to-Board Link; Pin spacing 3 mm; 2-pole; Length: 15.3 mm; white	<a href="http://www.wago.com/2059-902">www.wago.com/2059-902</a>
	<b>Item no.: 2059-902/018-000</b> Board-to-Board Link; Pin spacing 3 mm; 2-pole; Length: 17.5 mm; white	<a href="http://www.wago.com/2059-902/018-000">www.wago.com/2059-902/018-000</a>
	<b>Item no.: 2059-902/021-000</b> Board-to-Board Link; Pin spacing 3 mm; 2-pole; Length: 20.5 mm; white	<a href="http://www.wago.com/2059-902/021-000">www.wago.com/2059-902/021-000</a>

## Downloads

### Documentation

#### Additional Information

Technical explanations	Apr 3, 2019	pdf 2.0 MB	Download
------------------------	-------------	---------------	----------

## CAD/CAE-Data

### PCB Design

Symbol and Footprint 2059-302/998-403	URL	Download
---------------------------------------	-----	----------

CAX data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

### Supported formats:

- Accel EDA 14 & 15

Subject to changes. Please also observe the further product documentation!



- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

---

#### CAE data

ZUKEN Portal 2059-302/998-403	<a href="#">URL</a>	<a href="#">Download</a>
-------------------------------	---------------------	--------------------------

---

#### CAD data

2D/3D Models 2059-302/998-403	<a href="#">URL</a>	<a href="#">Download</a>
-------------------------------	---------------------	--------------------------

---

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 2059-302/998-403	<a href="#">URL</a>	<a href="#">Download</a>
---	---------------------	--------------------------

SMD PCB terminal block; 0.5 mm<sup>2</sup>; Pin spacing 3 mm; 2-pole; PUSH WIRE®; in tape-and-reel packaging; 0,50 mm<sup>2</sup>; white

---

Subject to changes. Please also observe the further product documentation!

---

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Installation Notes

### Conductor termination



Insert solid conductors via push-in termination.

### Conductor termination



Easy conductor removal, e.g., via operating tool (206-859)

Subject to changes. Please also observe the further product documentation!