

4-conductor terminal block; with fixing flange; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail

Item No.: 260-333



4-conductor terminal block; with fixing flange; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	260-333
EAN	4044918592840
Content	1
Order amount	50
Customer item number	

Notes

Technical data

Miscellaneous

Total number of connection points	4
Total number of potentials	1
Color	light gray
Pollution degree (1)	3
Rated voltage EN (1) [V]	400 [V]
Rated surge voltage (1) [kV]	6 [kV]
Nominal current [A]	18 [A]
Connection technology (1)	CAGE CLAMP®

Printview: 4-conductor terminal block; with fixing flange; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail - Item No.: 260-333

Technical data	
Cross section from (1) [mm ²]	0.08 [mm ²]
Cross section up to (1) [mm ²]	1.5 [mm ²]
Cross section from (1) [AWG]	28 [AWG]
Cross section up to (1) [AWG]	16 [AWG]
Stripped length from (1) [mm]	8 [mm]
Stripped length up to (1) [mm]	9 [mm]
Stripped length (1) [in]	0.33 [in]
Type of wiring	Side-entry wiring
Design	horizontal
Marking level	Side marking
Fire load [MJ]	0.043 [MJ]
Weight [g]	2.53 [g]
Width [mm]	8 [mm]
Width [in]	0.315 [in]
Height [mm]	17 [mm]
Height [in]	0.669 [in]
Length [mm]	25 [mm]
Length [in]	0.984 [in]

Approbation					
Item No.	Registration	Registration no.	Voltage [V]	Current [A]	Cross section [mm ² , AWG]
260-333	ABS	04-HG476174/1-PDA	400	17,5	1,5
260-333	BV	07436/C0	400	17,5	0,08-1,5
260-333	CCA	2110272.01	400	18	0.08-1.50
260-333	CCA	NL5800	400		1,5
260-333	CSA	18677-45	300	15	24-16
260-333	DNV	E-9215	400	18	1,5
260-333	GL	17295-00HH	400	17,5	1,5
260-333	KEMA	2110272.01	400		1,5
260-333	KR	HMB05880-EL002	400	17,5	1,5
260-333	LR	92/20242(E5)	400	17,5	1,5

Printview: 4-conductor terminal block; with fixing flange; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail - Item No.: 260-333

Approbation					
260-333	PRS	TE/1718/880590/0 8	400		1,5
260-333	RMR	11130002	400	17,5	1,5
260-333	UL	E45172	300	10	28-16

Accessories

Jumper

Item no.	Description	Pack. unit (Sub Pack)
260-402	Comb-style jumper bar; insulated; 2-way; reduces conductor size to 1 mm ²	25

End plate

Item no.	Description	Pack. unit (Sub Pack)
260-361	End plate; with fixing flange	50

Carrier rail

Item no.	Description	Pack. unit (Sub Pack)
210-154	Aluminum carrier rail; 1000 mm long; 18 mm wide; 7 mm high	1

General accessory

Item no.	Description	Pack. unit (Sub Pack)
209-132	Operating tool; for connecting comb-style jumper bar; 2-way; of insulating material	1
210-136	Test plug; 2 mm Ø; with 500 mm cable	1
210-137	Test plug; 2.3 mm Ø; with 500 mm cable	1
210-188/001-000	Stickers for operating instructions; for side-entry terminal strips; 260 to 262 Series	100
210-657	Operating tool with partially insulated shaft; blade (3.5 x 0.5) mm; short; suitable for 260, 261, 262, 264, 270, 280, 281, 869, 870 and 880 Series	1
210-720	Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm; suitable for 260, 261, 262, 264, 270, 280, 281, 290, 775, 776, 777, 769, 780, 781, 869, 870, 880, 2002, 2003, 2004, 2005 and 2022 Series	1
249-138	Test plug module; without locking device; modular; for 4-conductor terminal blocks; for 4-conductor terminal blocks	25
260-405	Test plug module; with locking latches; modular; for 4-conductor terminal blocks; for 260 Series	25


Printview: 4-conductor terminal block; with fixing flange; for screw or similar mounting types; Fixing hole 3.2 mm Ø; with 209-123 mounting carrier for DIN 35 rail - Item No.: 260-333

Accessories

Screwless end stop

Item no.	Description	Pack. unit (Sub Pack)
209-122	Plastic end stop; for WSB markers; for 210-154 aluminum rail	25

Images & drawings

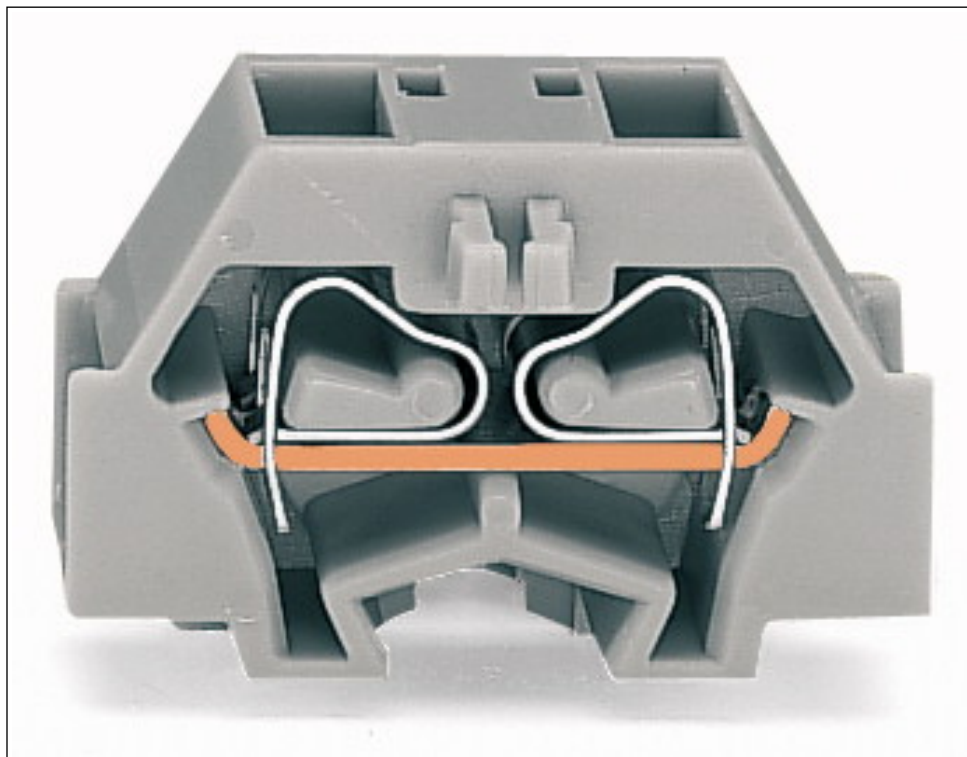

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.