

### Description


- 125C maximum total temperature operation
- Four sizes of shielded drum core inductors
- Inductance range from 0.33uH to 1000uH
- Current range up to 56 Amps peak
- Magnetic shielding
- Secure mounting

### Applications

- Computer, DVD players, and portable power devices
- LCD panels
- DC-DC converters
- Buck, boost, forward, and resonant converters
- Noise filtering and filter chokes

### Environmental Data

- Storage temperature range: -40C to +125C
- Operating ambient temperature range: -40C to +125C (range is application specific)
- Infrared reflow temperature: +240C for 30 seconds max.

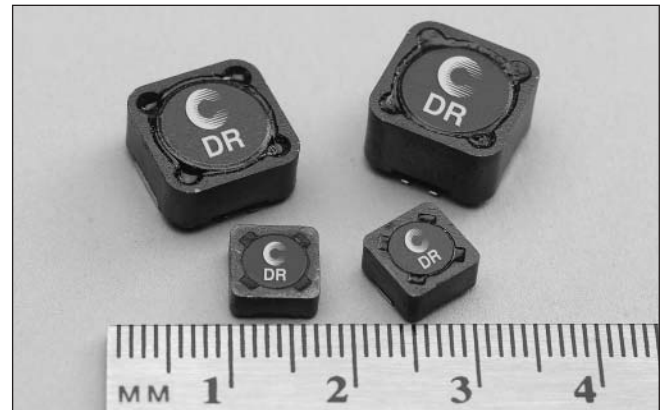

### Packaging

- Supplied in tape and reel packaging, 1350 (DR73), 1100 (DR74), 600 (DR125), and 350 (DR127) per reel

Part Number	Rated Inductance (µH)	OCL <sup>(1)</sup> +/-20% (µH)	I <sub>rms</sub> <sup>(2)</sup> Amperes	Isat <sup>(3)</sup> Amperes Peak	DCR <sup>(4)</sup> (Ω) Typ.	Volt-uSec <sup>(5)</sup> Typ.
DR73-R33	0.33	0.306	6.21	14.4	0.0073	1.98
DR73-1R0	1.00	0.992	5.28	7.97	0.0102	3.56
DR73-1R5	1.50	1.482	4.67	6.52	0.0130	4.36
DR73-2R2	2.20	2.070	4.15	5.52	0.0165	5.15
DR73-3R3	3.30	3.540	3.31	4.22	0.0259	6.73
DR73-4R7	4.70	4.422	3.09	3.78	0.0297	7.52
DR73-6R8	6.80	6.480	2.55	3.12	0.0435	9.11
DR73-8R2	8.20	8.930	2.19	2.66	0.0592	10.7
DR73-100	10.0	10.30	2.08	2.47	0.0656	11.5
DR73-150	15.0	15.01	1.83	2.05	0.0844	13.9
DR73-220	22.0	22.65	1.62	1.67	0.107	17.0
DR73-330	33.0	34.41	1.31	1.35	0.166	21.0
DR73-470	47.0	48.62	1.08	1.14	0.241	24.9
DR73-680	68.0	68.91	0.89	0.96	0.358	29.7
DR73-820	82.0	80.37	0.86	0.89	0.384	32.1
DR73-101	100	101.4	0.73	0.79	0.527	36.0
DR73-151	150	150.9	0.58	0.65	0.851	44.0
DR73-221	220	223.3	0.52	0.53	1.05	53.5
DR73-331	330	325.5	0.42	0.44	1.59	64.5
DR73-471	470	465.8	0.35	0.37	2.36	77.2
DR73-681	680	676.5	0.29	0.31	3.47	93.1
DR73-821	820	821.7	0.27	0.28	3.93	103
DR73-102	1000	995.0	0.26	0.25	4.34	113
DR74-R33	0.33	0.294	6.26	18.4	0.0074	1.71
DR74-1R0	1.00	0.952	5.39	10.2	0.0099	3.08
DR74-1R5	1.50	1.422	4.94	8.35	0.0118	3.76
DR74-2R2	2.20	1.986	4.76	7.06	0.0126	4.45
DR74-3R3	3.30	3.396	3.94	5.40	0.0183	5.81
DR74-4R7	4.70	5.182	3.34	4.37	0.0254	7.18
DR74-6R8	6.80	7.344	2.60	3.67	0.0418	8.55
DR74-8R2	8.20	8.566	2.53	3.40	0.0441	9.23
DR74-100	10.0	9.882	2.41	3.17	0.0489	9.92
DR74-150	15.0	16.09	2.11	2.48	0.0637	12.7
DR74-220	22.0	21.73	1.75	2.13	0.0925	14.7

(1) Open Circuit Inductance Test Parameters: 100KHz, 0.25Vrms, 0.0Aac.

(2) RMS current for an approximate ΔT of 40°C without core loss. It is recommended that the temperature of the part not exceed 125°C.

(3) Peak current for approximate 30% roll off at 20°C.

(4) DCR limits @ 20°C.

(5) Applied Volt-Time product (V-µS) across the inductor. This value represent the applied V-µS at 100KHz necessary to generate a core loss equal to 10% of the total losses for 40°C temperature rise.


Part Number	Rated Inductance (µH)	OCL <sup>(1)</sup> +/-20% (µH)	I <sub>rms</sub> <sup>(2)</sup> Amperes	I <sub>sat</sub> <sup>(3)</sup> Amperes Peak	DCR <sup>(4)</sup> (Ω) Typ.	Volt-µSec <sup>(5)</sup> Typ.
DR74-330	33.0	33.01	1.41	1.73	0.143	18.1
DR74-470	47.0	49.64	1.15	1.41	0.216	22.2
DR74-680	68.0	69.67	1.03	1.19	0.265	26.3
DR74-820	82.0	80.95	0.91	1.11	0.345	28.4
DR74-101	100	101.6	0.86	0.99	0.383	31.8
DR74-151	150	150.0	0.69	0.81	0.591	38.6
DR74-221	220	227.0	0.56	0.66	0.907	47.5
DR74-331	330	335.6	0.45	0.54	1.41	57.8
DR74-471	470	465.3	0.40	0.46	1.74	68.1
DR74-681	680	671.2	0.33	0.38	2.58	81.7
DR74-821	820	812.7	0.31	0.35	2.93	89.9
DR74-102	1000	1009	0.27	0.31	3.89	100
DR125-R47	0.47	0.456	17.6	33.0	0.0018	3.17
DR125-1R0	1.00	0.894	15.0	23.6	0.0024	4.43
DR125-1R5	1.50	1.478	13.8	18.3	0.0029	5.70
DR125-2R2	2.20	2.208	10.9	15.0	0.0045	6.97
DR125-3R3	3.30	3.084	9.26	12.7	0.0063	8.23
DR125-4R7	4.70	5.274	7.18	9.71	0.0105	10.8
DR125-6R8	6.80	6.588	6.64	8.68	0.0123	12.0
DR125-8R2	8.20	8.048	5.54	7.86	0.0176	13.3
DR125-100	10.0	9.654	5.35	7.17	0.0189	14.6
DR125-150	15.0	15.35	4.27	5.69	0.0298	18.4
DR125-220	22.0	22.36	3.70	4.71	0.0396	22.2
DR125-330	33.0	33.74	3.28	3.84	0.0505	27.2
DR125-470	47.0	47.47	2.71	3.24	0.0740	32.3
DR125-680	68.0	67.91	2.22	2.70	0.101	38.6
DR125-820	82.0	86.89	2.05	2.39	0.128	43.7
DR125-101	100	102.7	1.78	2.20	0.170	47.5
DR125-151	150	151.1	1.48	1.81	0.248	57.6
DR125-221	220	216.8	1.19	1.51	0.384	69.0
DR125-331	330	332.6	1.06	1.22	0.482	85.5
DR125-471	470	473.1	0.87	1.02	0.718	102
DR125-681	680	679.8	0.70	0.85	1.10	122
DR125-821	820	828.0	0.60	0.77	1.49	135
DR125-102	1000	1008	0.57	0.70	1.69	149
DR125-124	120000	120630	0.060	0.069	150	1521
DR127-R47	0.47	0.419	17.9	56.0	0.00195	3.50
DR127-1R0	1.00	0.821	15.5	40.0	0.00313	4.90
DR127-1R5	1.50	1.357	13.5	31.1	0.00341	6.30
DR127-2R2	2.20	2.027	12.5	25.5	0.00402	7.70
DR127-3R3	3.30	2.831	10.5	21.5	0.00567	9.10
DR127-4R7	4.70	4.841	8.25	16.5	0.00917	11.9
DR127-6R8	6.80	7.387	7.34	13.3	0.0116	14.7
DR127-8R2	8.20	8.861	6.32	12.2	0.0157	16.1
DR127-100	10.0	10.47	6.04	11.2	0.0172	17.5
DR127-150	15.0	14.09	5.03	9.66	0.0247	20.3
DR127-220	22.0	22.93	4.00	7.57	0.0391	25.9
DR127-330	33.0	33.92	3.23	6.22	0.0600	31.5
DR127-470	47.0	47.05	2.95	5.28	0.0719	37.1
DR127-680	68.0	66.48	2.44	4.44	0.105	44.1
DR127-820	82.0	79.75	2.09	4.06	0.143	48.3
DR127-101	100	99.31	1.96	3.64	0.163	53.9
DR127-151	150	144.9	1.59	3.01	0.247	65.1
DR127-221	220	221.5	1.29	2.43	0.376	80.5
DR127-331	330	323.6	1.04	2.01	0.574	97.3
DR127-471	470	467.1	0.85	1.68	0.861	117
DR127-681	680	676.7	0.76	1.39	1.08	141
DR127-821	820	818.1	0.65	1.27	1.47	155
DR127-102	1000	1005	0.61	1.14	1.66	172

(1) Open Circuit Inductance Test Parameters: 100KHz, 0.25Vrms, 0.0Aac.  
(2) RMS current for an approximate ΔT of 40°C without core loss. It is recommended that the temperature of the part not exceed 125°C.  
(3) Peak current for approximate 30% roll off at 20°C.


(4) DCR limits @ 20°C.  
(5) Applied Volt-Time product (V-µS) across the inductor. This value represent the applied V-µS at 100KHz necessary to generate a core loss equal to 10% of the total losses for 40°C temperature rise.

**Mechanical Diagrams**


**DR73 Series**

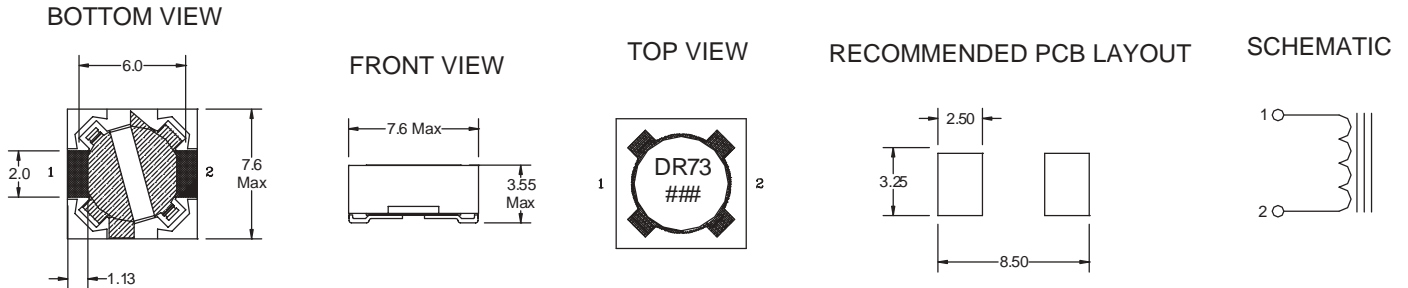


**DR74 Series**

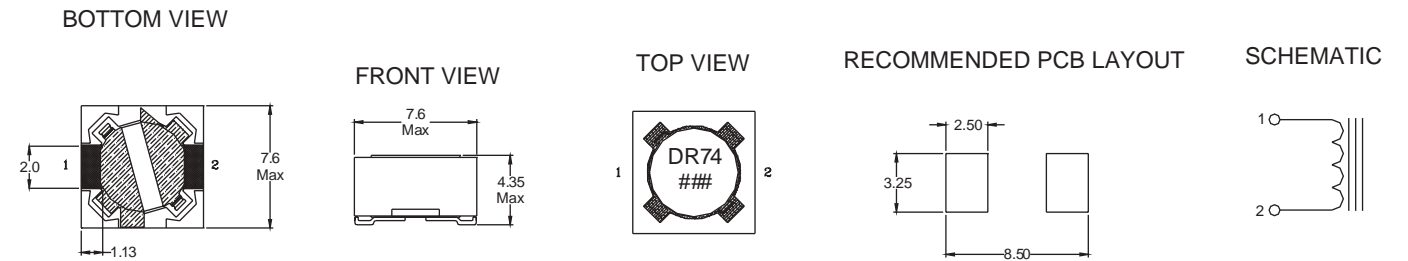

**DR125 Series**

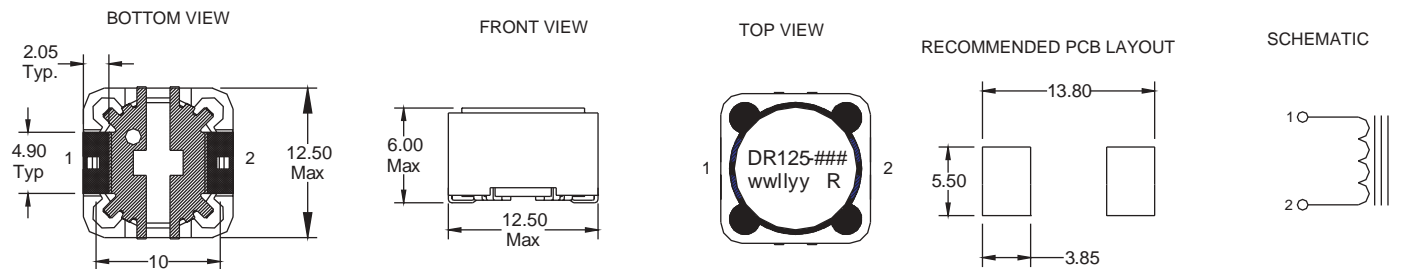

**DR127 Series**

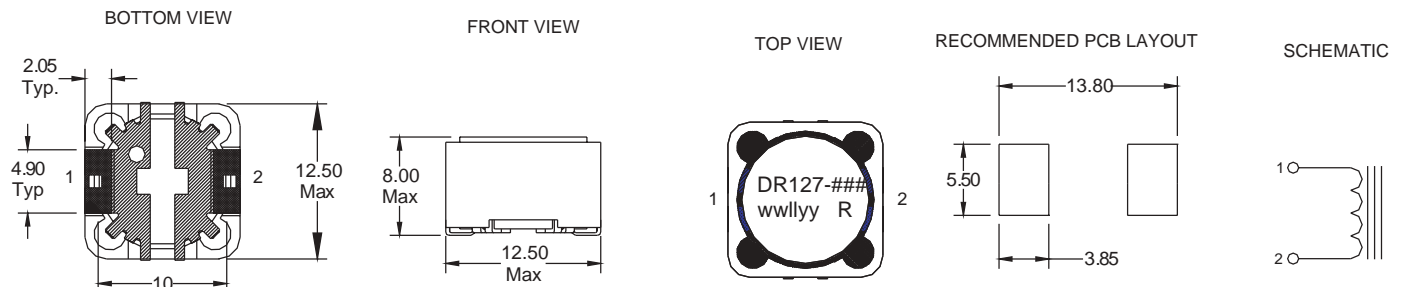


Dimensions in Millimeters.

### = Inductance value per family chart  
wwlyy = (date code) R = revision level

**Packaging Information**

**DR73 Series**


Ao=7.90mm  
 Bo=7.90mm  
 Ko=3.80mm

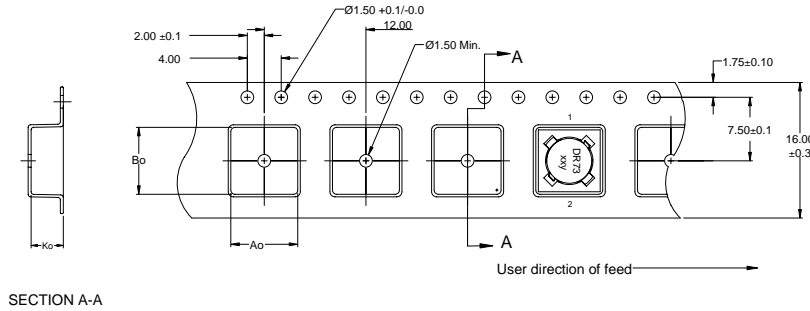

Parts packaged on 13" Diameter reel,  
 1,350 parts per reel.

**DR74 Series**


Ao=7.90mm  
 Bo=7.90mm  
 Ko=4.70mm

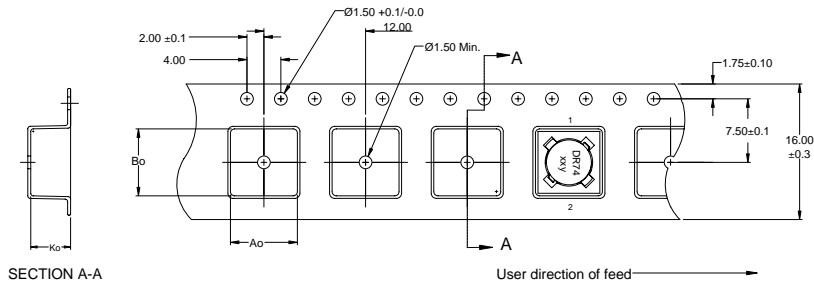

Parts packaged on 13" Diameter reel,  
 1,100 parts per reel.

**DR125 Series**


Ao=13.0mm  
 Bo=13.0mm  
 Ko=6.30mm

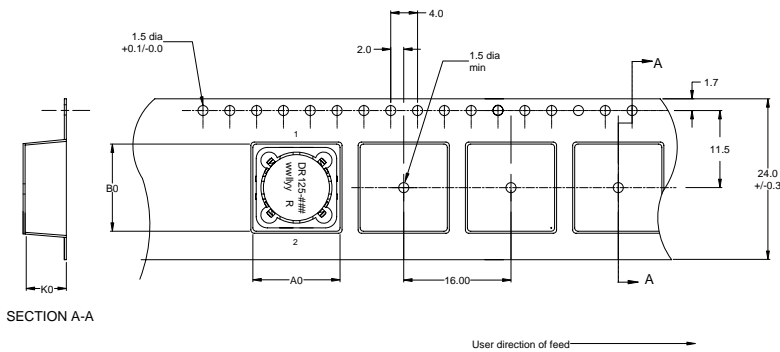






Parts packaged on 13" Diameter reel,  
 600 parts per reel.

**DR127 Series**

Ao=13.0mm  
 Bo=13.0mm  
 Ko=8.30mm

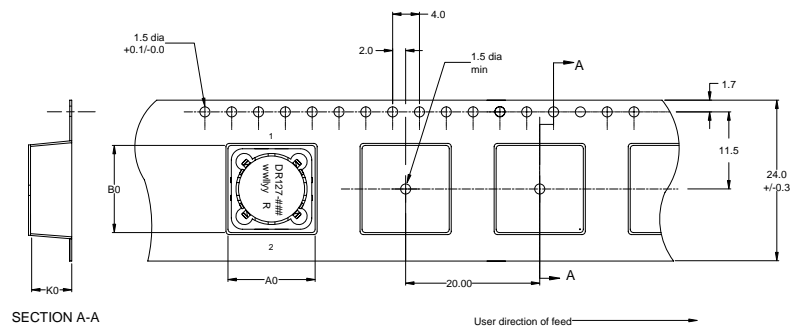

Parts packaged on 13" Diameter reel,  
 350 parts per reel.

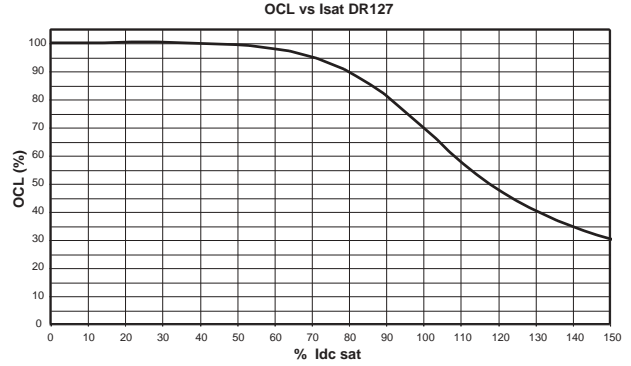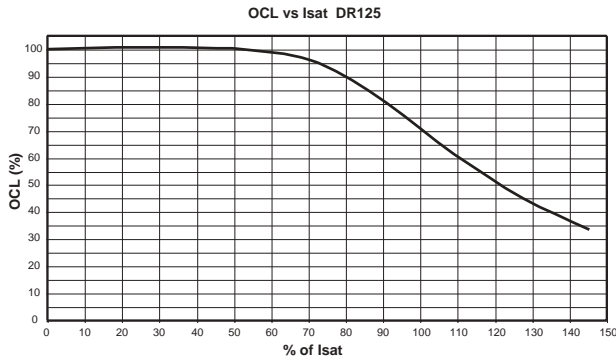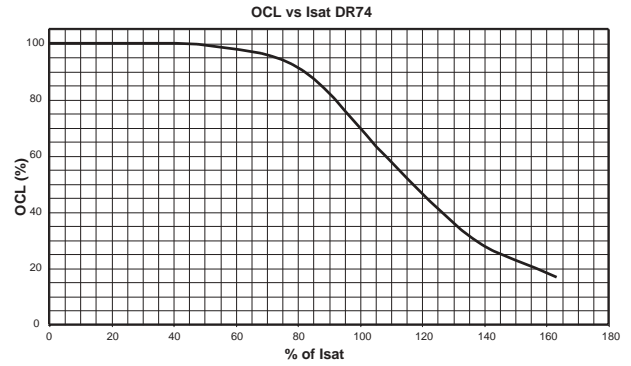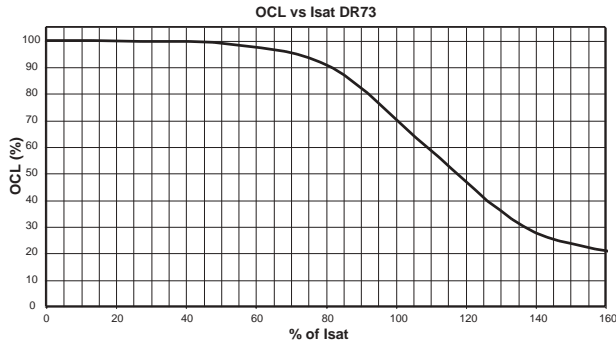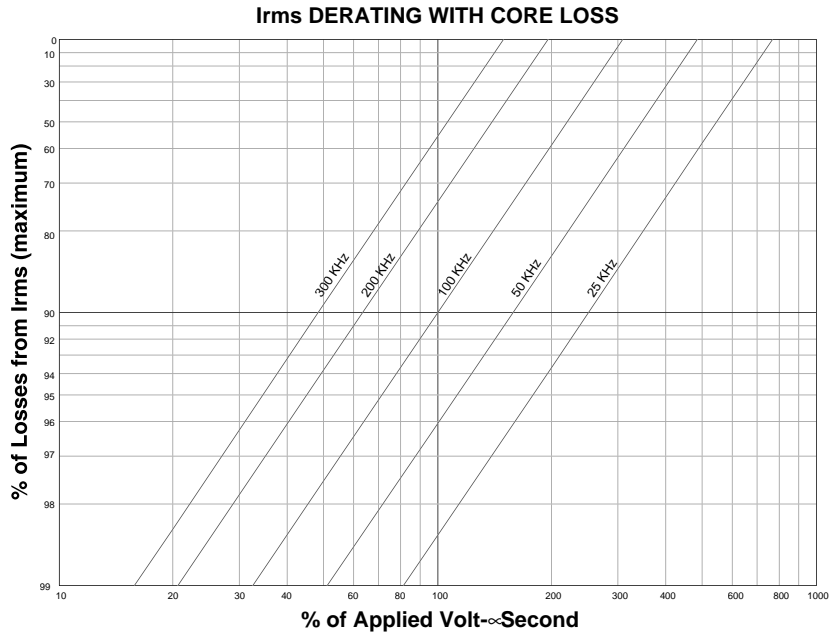**Rolloff**

**Core Loss**


**Visit us on the Web at [www.cooperET.com](http://www.cooperET.com)**

3601 Quantum Boulevard Boynton Beach, Florida 33426-8638  
Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.