MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 81926

SWITCH - ENCLOSED

CATALOG LISTING
BZH1-2RN2

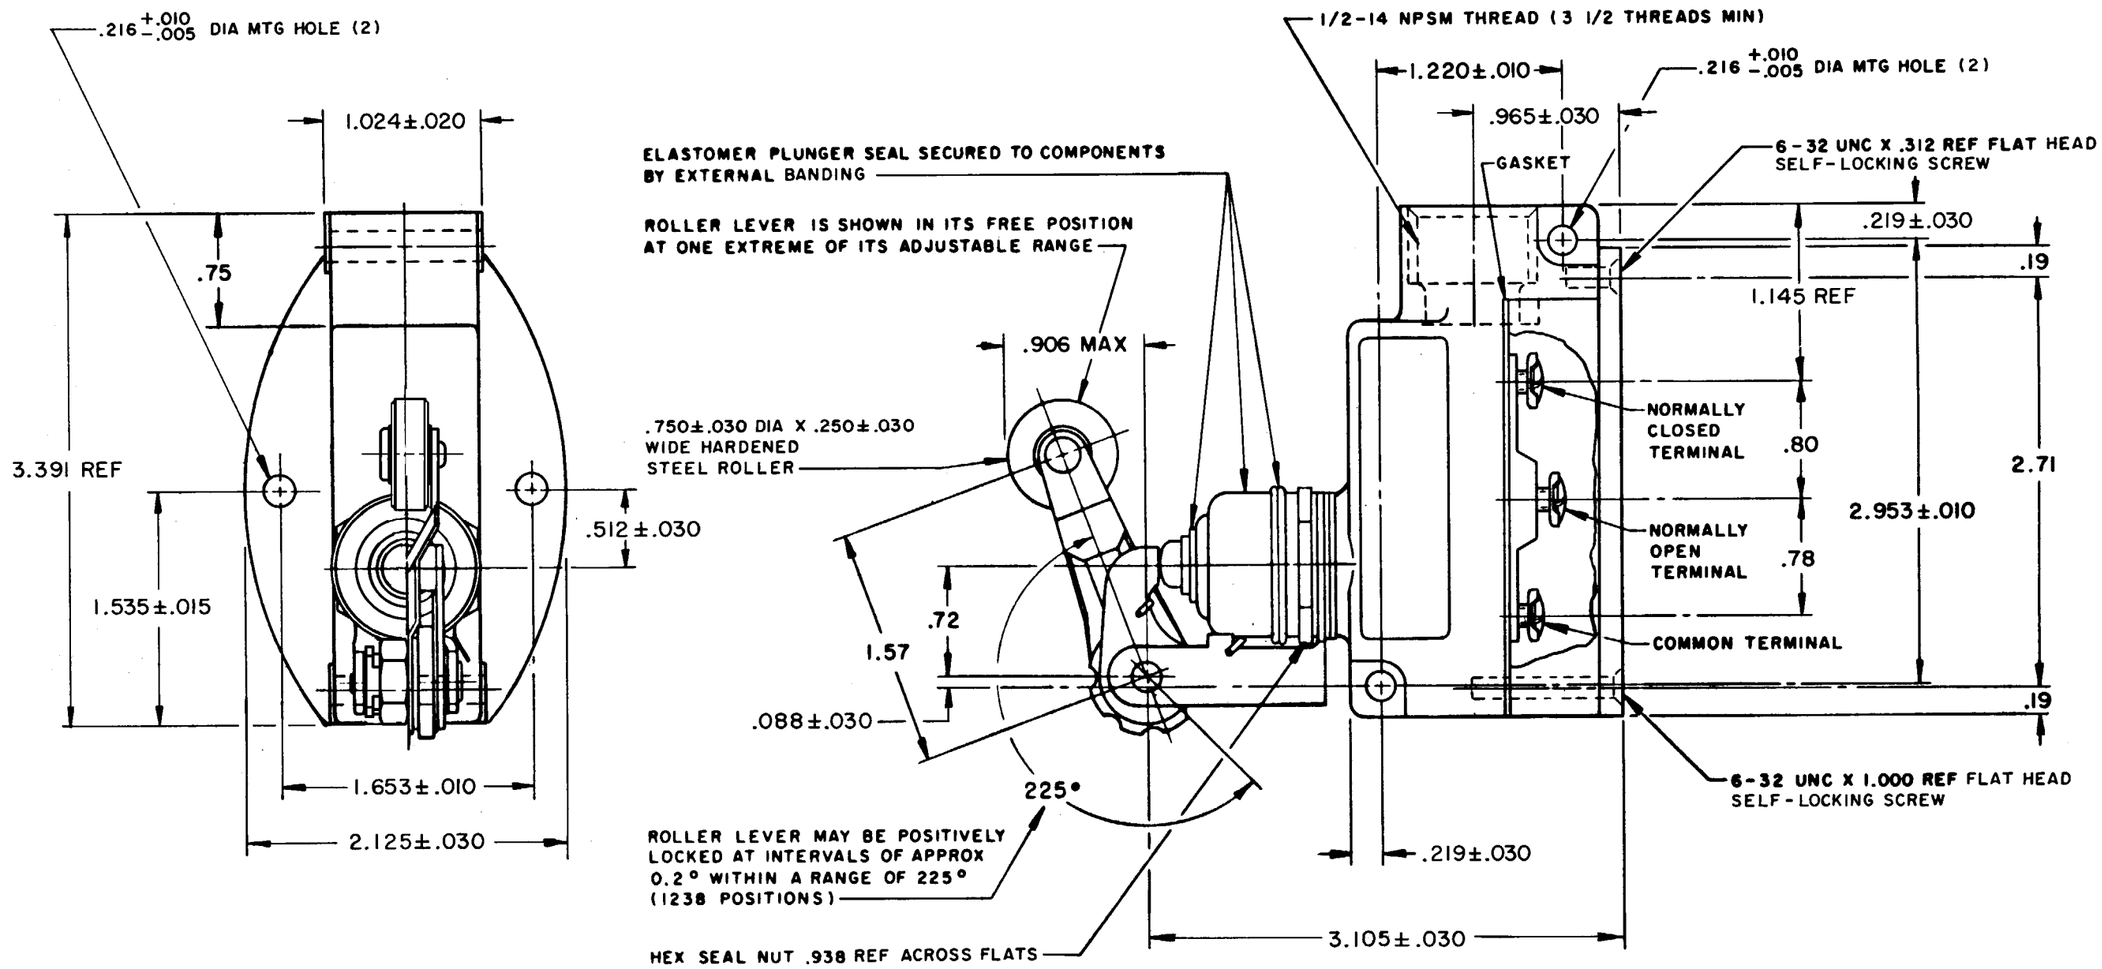

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - - - 10-20 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - - - - 6 OZ MIN PRETRAVEL - - - - - - - - - - .188 MAX DIFFERENTIAL TRAVEL - - - - - .006 MAX OVERTRAVEL - - - - - - - - - - .219 MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8HP-125 VAC; 1/4HP-250 VAC CODE L74 1/2A-125 VDC; 174A-250 VDC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
SWITCH-BASIC REPLACEMENT - - - BZ-2RN702		WEIGHT

NOTES
1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)

2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER

DRAWING NUMBER	BZH1-2RN2
M	
ISSUE	7
RELEASE NO.	DR-365-1
REPLACES	
CHECK	
DRAWN	OMW 26 FEB 70
CHECK	RAW 5 MAR 70
CHECK	WHE 5 MAR 70

REVISIONS

A	PR-1342	L S D 2 JUL 70
B	C028612	M B S 11 FEB 71
C	C037675	K P K 23 SEP 76
D	CO 55989	WJM 1 NOV 84
E	C072977	G J W 11 AUG 92
F	CO-77179-C	MAM 12 MAR 94
G	C081513B	J A K 11 MAR 97

FORMTEK