

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE Professional (VIP) module for Siemens ET200 ISP controllers. Interface to HART RTD analog input, 4 channel. 125 V AC/DC, 1 A rating.

### Your advantages

- ✓ Interface from field devices to RTD analog input 6ES7134-7SD51-0AB0 card
- ✓ I/O marking for field wiring clearly identified when device is mounted
- ✓ Compact design reduces space requirements in the control cabinet
- ✓ A single, metal mounting foot allows easy installation and removal to the mounting rail



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 827676
GTIN	4046356827676
Weight per Piece (excluding packing)	100.000 g
Custom tariff number	85369010
Country of origin	United States

### Technical data

#### Dimensions

Width	45 mm
Height	65.5 mm
Depth	56 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
---------------------------------	------------------

# Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

## Technical data

### Ambient conditions

Ambient temperature (storage/transport)	-20 °C ... 70 °C
---	------------------

### General

Nominal voltage $U_N$	60 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	16
Status display	No

### Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Connection data 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	16
Pitch	2.54 mm

### Supported controller

Controller	Siemens ET200 ISP
- suitable I/O card	6ES7134-7SD51-0AB0

### Standards and Regulations

Flammability rating according to UL 94	V0
--	----


### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

Circuit diagram

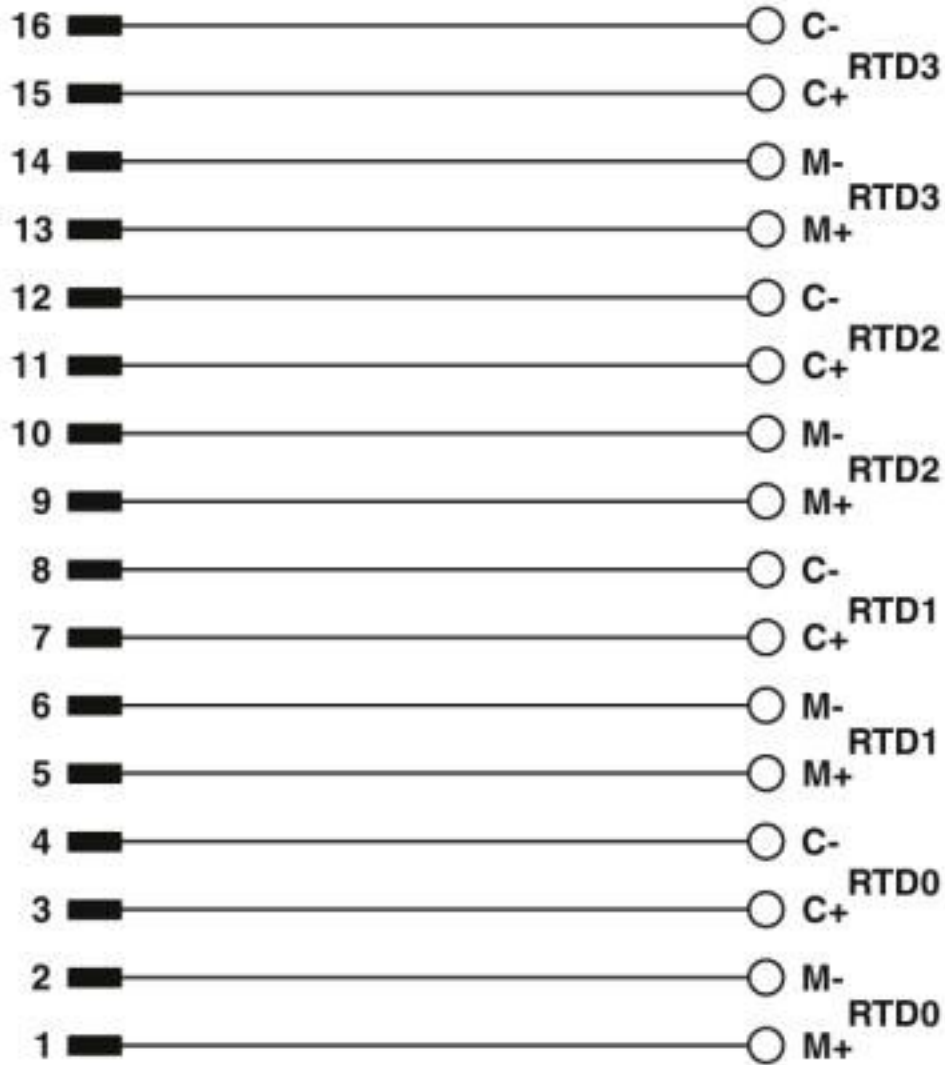

### Classifications

eCl@ss

eCl@ss 10.0.1	27141152
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27250300
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152

# Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

## Classifications

### eCl@ss

eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

### ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121432
UNSPSC 19.0	39121432

## Approvals


### Approvals

Approvals

CSA / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN	125 V		
Nominal current IN	1 A		
mm <sup>2</sup> /AWG/kcmil	30-12		

# Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

## Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		30-12	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		30-12	

cULus Recognized	
------------------	--

## Accessories

### Accessories

#### System cable

Cable - VIP-CAB-FLK16/0,14/0,5M - 2318460



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 0.5 m

Cable - VIP-CAB-FLK16/0,14/1,0M - 2318473



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 1 m

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

### Accessories

#### Cable - VIP-CAB-FLK16/0,14/1,5M - 2318486



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 1.5 m

---

#### Cable - VIP-CAB-FLK16/0,14/2,0M - 2318499



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 2 m

---

#### Cable - VIP-CAB-FLK16/0,14/3,0M - 2318509



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 3 m

---

#### Cable - VIP-CAB-FLK16/0,14/4,0M - 2318512



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 4 m

---

#### Cable - VIP-CAB-FLK16/0,14/6,0M - 2318525



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: 6 m

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

### Accessories

#### Cable - VIP-CAB-FLK16-0,14/... - 2318538



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position, 180 °-out put); connection 2: IDC/FLK socket strip (1x 16-position, 90 °-out put); cable length: variable

---

#### Cable - FLK 16/EZ-DR/ 50/KONFEK - 2299291



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 0.5 m

---

#### Cable - FLK 16/EZ-DR/ 100/KONFEK - 2299301



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 1 m

---

#### Cable - FLK 16/EZ-DR/ 150/KONFEK - 2299314



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 1.5 m

---

#### Cable - FLK 16/EZ-DR/ 200/KONFEK - 2299327



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 2 m

---

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

### Accessories

#### Cable - FLK 16/EZ-DR/ 300/KONFEK - 2299330



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 3 m

---

#### Cable - FLK 16/EZ-DR/ 400/KONFEK - 2299343



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 4 m

---

#### Cable - FLK 16/EZ-DR/ 600/KONFEK - 2299356



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 6 m

---

#### Cable - FLK 16/EZ-DR/ 800/KONFEK - 2299369



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 8 m

---

#### Cable - FLK 16/EZ-DR/1000/KONFEK - 2299372



Round cable set; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position); cable length: 10 m

---



## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

### Accessories

Cable - FLK EZ-DR.../.../... - 2295059



Round cable, with preassembly, not shielded, variable cable length

---

Cable - FLK 16/EZ-DR/ 100/KONFEK/S - 2304542



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 1 m

---

Cable - FLK 16/EZ-DR/ 150/KONFEK/S - 2304623



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 1.5 m

---

Cable - FLK 16/EZ-DR/ 200/KONFEK/S - 2304555



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 2 m

---

Cable - FLK 16/EZ-DR/ 300/KONFEK/S - 2318088



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 3 m

---

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

### Accessories

Cable - FLK 16/EZ-DR/ 400/KONFEK/S - 2318091



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 4 m

Cable - FLK 16/EZ-DR/ 500/KONFEK/S - 2318965



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 5 m

Cable - FLK 16/EZ-DR/ 600/KONFEK/S - 2314477



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 16-position); connection 2: IDC/FLK socket strip (1x 16-position) (The braided shield is routed to a separate cable end.); cable length: 6 m

Cable - FLK EZ-DR-S.../.../... - 2295046



Round cable, with preassembly, shielded, variable cable length

### Terminal marking

Marker for terminal blocks - UC-TM 4 - 0818111



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

## Passive module - VIP-2/SC/FLK16/ISP 4AI RTD - 2903872

### Accessories

#### Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks. Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

#### Marker for terminal blocks - UCT-TM 6 - 0828736



Marker for terminal blocks. Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

#### Zack marker strip - ZB 5,08:UNBEDRUCKT - 0809793



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

#### Zack marker strip - ZB 22:UNBEDRUCKT - 0811862



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 22 mm, lettering field size: 10.5 x 21.8 mm, Number of individual labels: 4